



---

# Monitoring Dell EMC Isilon

Dell EMC: Isilon PowerPack version 101

---

# Table of Contents

<b>Introduction</b> .....	<b>3</b>
Overview .....	3
What is Dell EMC Isilon? .....	3
What Does the Dell EMC: Isilon PowerPack Monitor? .....	3
Installing the PowerPack .....	4
<b>Configuring Dell EMC Isilon for Monitoring</b> .....	<b>6</b>
Overview .....	6
Prerequisites .....	6
Creating a SOAP/XML Credential for Dell EMC Isilon .....	7
Creating an SNMP Credential for Dell EMC Isilon .....	8
<b>Discovering Dell EMC Isilon Storage Arrays</b> .....	<b>10</b>
Overview .....	10
Discovering Dell EMC Isilon Component Devices .....	10
Verifying Discovery and Dynamic Application Alignment .....	12
Viewing Dell EMC Isilon Component Devices .....	14

## Introduction

---

### Overview

This manual describes how to monitor Dell EMC Isilon storage systems in the ScienceLogic platform.

**NOTE:** ScienceLogic provides this documentation for the convenience of ScienceLogic customers. Some of the configuration information contained herein pertains to third-party vendor software that is subject to change without notice to ScienceLogic. ScienceLogic makes every attempt to maintain accurate technical information and cannot be held responsible for defects or changes in third-party vendor software. There is no written or implied guarantee that information contained herein will work for all third-party variants. See the End User License Agreement (EULA) for more information.

---

### What is Dell EMC Isilon?

Dell EMC Isilon is a clustered, scale-out Network Attached Storage (NAS) array. The *Dell EMC: Isilon PowerPack* uses the Isilon API to discover the storage array and collect health, configuration, performance, and capacity information.

---

### What Does the Dell EMC: Isilon PowerPack Monitor?

To monitor Dell EMC Isilon storage devices with the ScienceLogic platform, you must install the *Dell EMC: Isilon PowerPack*. This PowerPack lets you discover, model, and collect data about Isilon storage devices.

The *Dell EMC: Isilon PowerPack* includes:

- Dynamic Applications to discover, model, and monitor performance metrics and collect configuration data for Dell EMC Isilon devices

- Device Classes for each type of Isilon device monitored
- Event Policies that are triggered when Isilon devices meet certain status criteria
- Example credentials that you can use as templates to create a SOAP/XML credential for connecting to Isilon devices and an SNMP credential for device class alignment

## Installing the PowerPack


Before completing the steps in this manual, you must import and install version 101 of the *Dell EMC: Isilon PowerPack*.

**NOTE:** To install version 101 of the PowerPack, your ScienceLogic system must be upgraded to the 8.2.0 or later release.

To download and install a PowerPack:

**TIP:** By default, installing a new version of a PowerPack overwrites all content in that PowerPack that has already been installed on the target system. You can use the **Enable Selective PowerPack Field Protection** setting in the **Behavior Settings** page (System > Settings > Behavior) to prevent new PowerPacks from overwriting local changes for some commonly customized fields. (For more information, see the **System Administration** manual.)

1. Download the PowerPack from the [ScienceLogic Customer Portal](#).
2. Go to the **PowerPack Manager** page (System > Manage > PowerPacks).
3. In the **PowerPack Manager** page, click the **[Actions]** button, then select *Import PowerPack*.
4. The **Import PowerPack** dialog box appears:

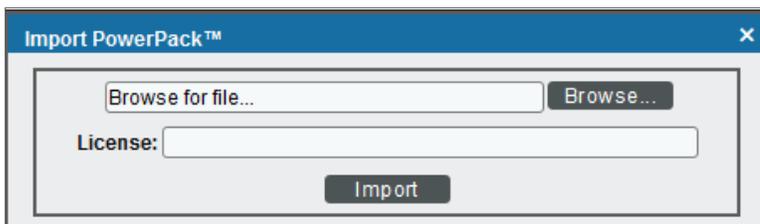

5. Click the **[Browse]** button and navigate to the PowerPack file.
6. When the **PowerPack Installer** modal page appears, click the **[Install]** button to install the PowerPack.

**NOTE:** If you exit the **PowerPack Installer** modal page without installing the imported PowerPack, the imported PowerPack will not appear in the **PowerPack Manager** page. However, the imported PowerPack will appear in the **Imported PowerPacks** modal page. This page appears when you click the **[Actions]** menu and select *Install PowerPack*.

## Configuring Dell EMC Isilon for Monitoring

---

### Overview

The following sections describe how to configure Dell EMC Isilon storage arrays for monitoring in the ScienceLogic platform using the *Dell EMC: Isilon PowerPack*:

- [Prerequisites](#)
- [Creating a SOAP/XML Credential for Dell EMC Isilon](#)
- [Creating an SNMP Credential for Dell EMC Isilon](#)

---

### Prerequisites

Before performing the tasks in this chapter, you must have already installed and configured the Dell EMC Isilon storage arrays that you want to monitor with the ScienceLogic platform.

If you are using a Secure Sockets Layer (SSL) certificate to communicate with the Isilon storage arrays you are monitoring, you must add an Isilon SSL certificate on your ScienceLogic appliance in the following file:

```
/var/lib/em7/content/silo_core_rest/certs.crt
```

**NOTE:** For more information about installing an SSL certificate, see the manual *Installing an SSL Certificate*.


Additionally, you should take note of the SNMP community string used by the Isilon storage arrays you want to monitor.

# Creating a SOAP/XML Credential for Dell EMC Isilon

To configure the ScienceLogic platform to monitor Dell EMC Isilon storage arrays, you must first create a credential that allows the Dynamic Applications in the *Dell EMC: Isilon PowerPack* to communicate with your Isilon storage devices. The PowerPack includes an example SOAP/XML credential that you can edit for your own use.

To configure the SOAP/XML credential to access Dell EMC Isilon devices:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Locate the **Dell EMC: Isilon SOAP Example** credential, and then click its wrench icon (). The **Edit SOAP/XML Credential** modal page appears.

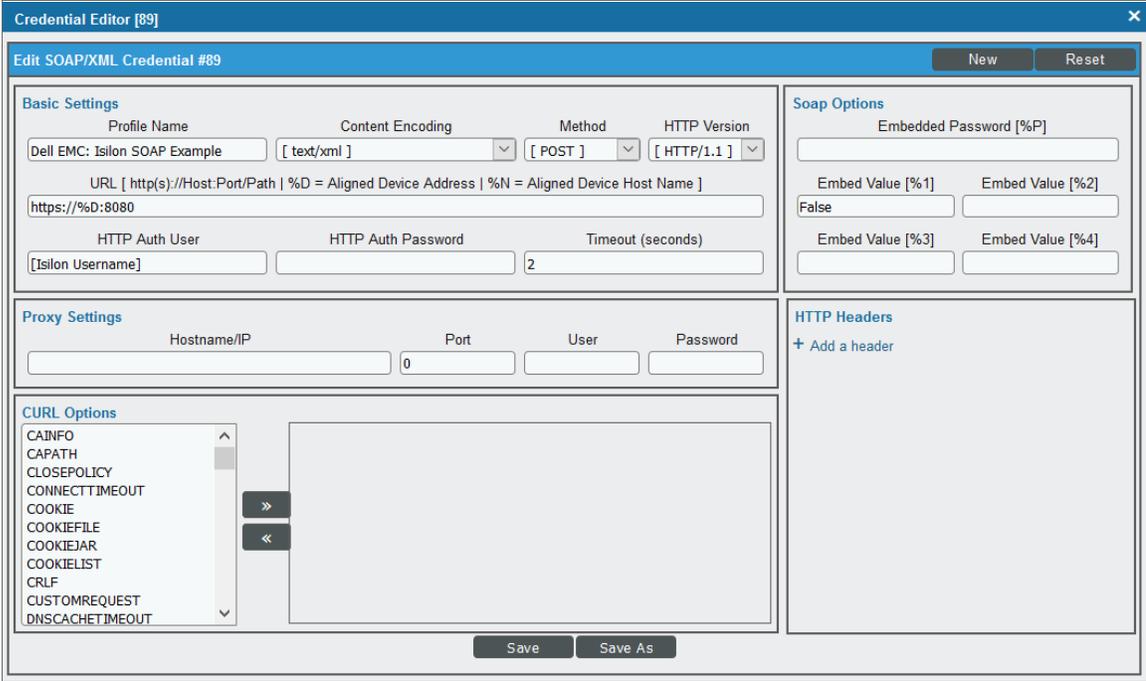

3. Update the values in the following fields:

## **Basic Settings**

- **Profile Name.** Type a new name for the credential.
- **HTTP Auth User.** Type the Isilon administrator username.
- **HTTP Auth Password.** Type the Isilon administrator password.

**SOAP Options**

- **Embed Value [%1]**. Do one of the following:
  - Type "True" to enable verification of the storage array's SSL certificate.
  - Type "False" or leave this field blank to disable SSL verification.

**NOTE:** This field is not case-sensitive.

4. Click [Save As].

## Creating an SNMP Credential for Dell EMC Isilon

In addition to the SOAP/XML credential, you will also need to configure an SNMP credential to enable the ScienceLogic platform to monitor Dell EMC Isilon storage arrays. The *Dell EMC: Isilon PowerPack* includes an example SNMP credential that you can edit for your own use.

To configure the SNMP credential to access Dell EMC Isilon devices:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Locate the **Dell EMC: Isilon SNMPv2 Example** credential, and then click its wrench icon (🔧). The **Edit SNMP Credential** modal page appears.

**Credential Editor [90]**

**Edit SNMP Credential #90** [New] [Reset]

**Basic Settings**

Profile Name: Dell EMC: Isilon SNMPv2 Example | SNMP Version: [ SNMP V2 ]

Port: 161 | Timeout(ms): 1500 | Retries: 1

**SNMP V1/V2 Settings**

SNMP Community (Read-Only): [Isilon Community Name] | SNMP Community (Read/Write):

**SNMP V3 Settings**

Security Name: | Security Passphrase: | Authentication Protocol: MD5 | Security Level: No Authentication / No Encryption | SNMP v3 Engine ID: | Context Name: | Privacy Protocol: DES | Privacy Protocol Pass Phrase: |

[Save] [Save As]

3. Update the values in the following fields:

**Basic Settings**

- *Profile Name*. Type a new name for the credential.

**SNMP V1/V2 Settings**

- *SNMP Community (Read-Only)*. Type the Isilon storage array's SNMP community string.

4. Click [**Save As**].

## Discovering Dell EMC Isilon Storage Arrays

---

### Overview

- [Discovering Dell EMC Isilon Component Devices](#)
- [Verifying Discovery and Dynamic Application Alignment](#)
- [Viewing Dell EMC Isilon Component Devices](#)

---

### Discovering Dell EMC Isilon Component Devices

To model and monitor your Dell EMC Isilon storage arrays, you must run a discovery session to discover the storage arrays that the ScienceLogic platform will use as the root devices for monitoring the Isilon storage system.

After the discovery session completes, the Dynamic Applications in the *Dell EMC: Isilon* PowerPack automatically align to the storage array device, and then the PowerPack discovers, models, and monitors the remaining Isilon storage devices.

To discover the Isilon arrays that you want to monitor, perform the following steps:

1. Go to the **Discovery Control Panel** page (System > Manage > Discovery).

2. On the **Discovery Control Panel**, click the **[Create]** button. The **Discovery Session Editor** page appears.


3. Supply values in the following fields:
  - **IP Address/Hostname Discovery List.** Type the IP address or hostname for the Isilon storage array or arrays that you want to discover.
  - **SNMP Credentials.** Select the SNMP credential that you created for Isilon devices.
  - **Other Credentials.** Select the SOAP/XML credential that you created for Isilon devices.
  - **Discover Non-SNMP.** Select this checkbox.
  - **Model Devices.** Select this checkbox.
  - **Duplication Protection.** Select this checkbox.
4. Optionally, you can enter values in the other fields on this page. For more information about the other fields on this page, see the **Discovery & Credentials** manual.
5. Click the **[Save]** button to save the discovery session and then close the **Discovery Session Editor** window.
6. The discovery session you created appears at the top of the **Discovery Control Panel** page. Click its lightning-bolt icon (  ) to run the discovery session.
7. The **Discovery Session** window appears. After the devices are discovered, click the device icon (  ) to view the **Device Properties** page for each device.

# Verifying Discovery and Dynamic Application Alignment

To verify that the ScienceLogic platform has automatically aligned the correct Dynamic Applications during discovery:

1. After discovery has completed, click the device icon for the Isilon Storage Array device (  ).
2. From the **Device Properties** page for the array device, click the **[Collections]** tab. The **Dynamic Application Collections** page appears.
3. All applicable Dynamic Applications for the storage array device are automatically aligned during discovery.

**NOTE:** It can take several minutes after the discovery session has completed for Dynamic Applications to appear in the **Dynamic Application Collections** page.

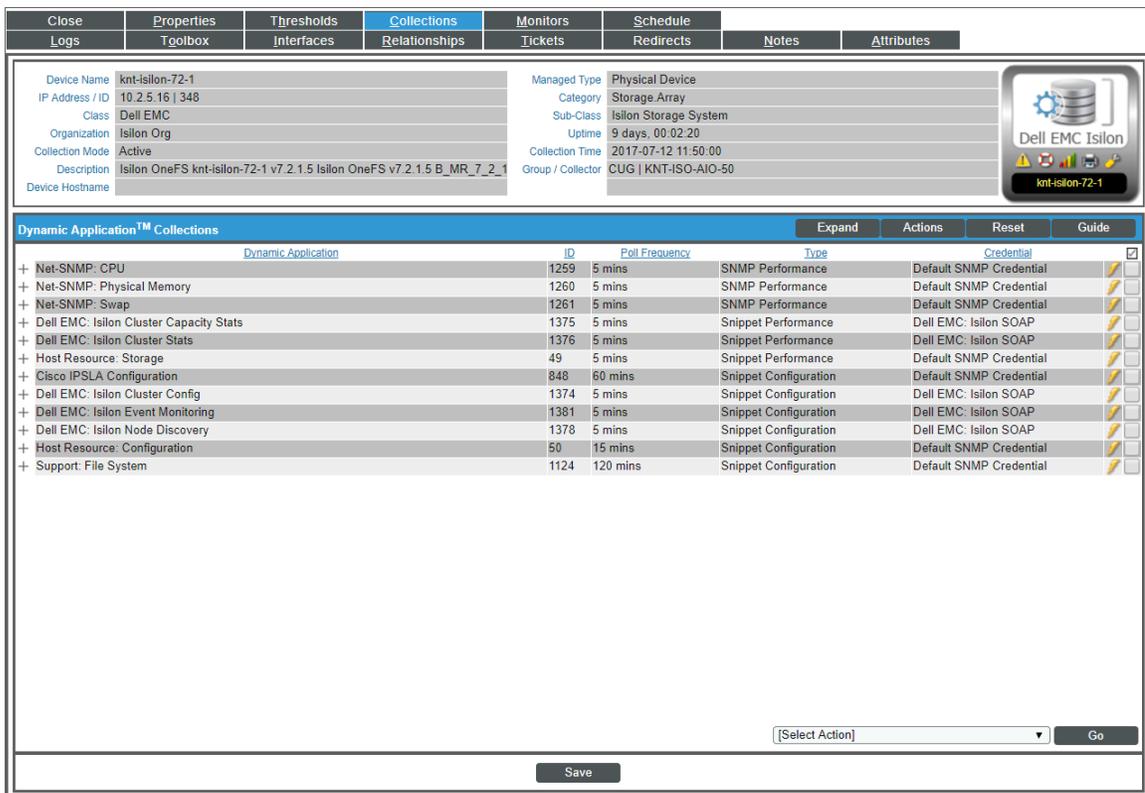

Dynamic Application™ Collections		Expand	Actions	Reset	Guide
Dynamic Application	ID	Poll Frequency	Type	Credential	
+ Net-SNMP: CPU	1259	5 mins	SNMP Performance	Default SNMP Credential	<input type="checkbox"/>
+ Net-SNMP: Physical Memory	1260	5 mins	SNMP Performance	Default SNMP Credential	<input type="checkbox"/>
+ Net-SNMP: Swap	1261	5 mins	SNMP Performance	Default SNMP Credential	<input type="checkbox"/>
+ Dell EMC: Isilon Cluster Capacity Stats	1375	5 mins	Snippet Performance	Dell EMC: Isilon SOAP	<input type="checkbox"/>
+ Dell EMC: Isilon Cluster Stats	1376	5 mins	Snippet Performance	Dell EMC: Isilon SOAP	<input type="checkbox"/>
+ Host Resource: Storage	49	5 mins	Snippet Performance	Default SNMP Credential	<input type="checkbox"/>
+ Cisco IPSLA Configuration	848	60 mins	Snippet Configuration	Default SNMP Credential	<input type="checkbox"/>
+ Dell EMC: Isilon Cluster Config	1374	5 mins	Snippet Configuration	Dell EMC: Isilon SOAP	<input type="checkbox"/>
+ Dell EMC: Isilon Event Monitoring	1381	5 mins	Snippet Configuration	Dell EMC: Isilon SOAP	<input type="checkbox"/>
+ Dell EMC: Isilon Node Discovery	1378	5 mins	Snippet Configuration	Dell EMC: Isilon SOAP	<input type="checkbox"/>
+ Host Resource: Configuration	50	15 mins	Snippet Configuration	Default SNMP Credential	<input type="checkbox"/>
+ Support: File System	1124	120 mins	Snippet Configuration	Default SNMP Credential	<input type="checkbox"/>


[Select Action]

You should see the following Dynamic Applications aligned to the storage array device:

Dynamic Application	Credential Type
Dell EMC: Isilon Cluster Capacity Stats	SOAP/XML
Dell EMC: Isilon Cluster Config	SOAP/XML
Dell EMC: Isilon Cluster Stats	SOAP/XML
Dell EMC: Isilon Event Monitoring	SOAP/XML
Dell EMC: Isilon Node Discovery	SOAP/XML
Host Resource: Configuration	SNMP
Host Resource: Storage	SNMP
Net-SNMP: CPU	SNMP
Net-SNMP: Physical Memory	SNMP
Net-SNMP: Swap	SNMP
Support: File System	SNMP

If the listed Dynamic Applications have not been automatically aligned during discovery, you can align them manually. To do so, perform the following steps:

1. Click the **[Actions]** button and then select *Add Dynamic Application*. The **Dynamic Application Alignment** page appears:

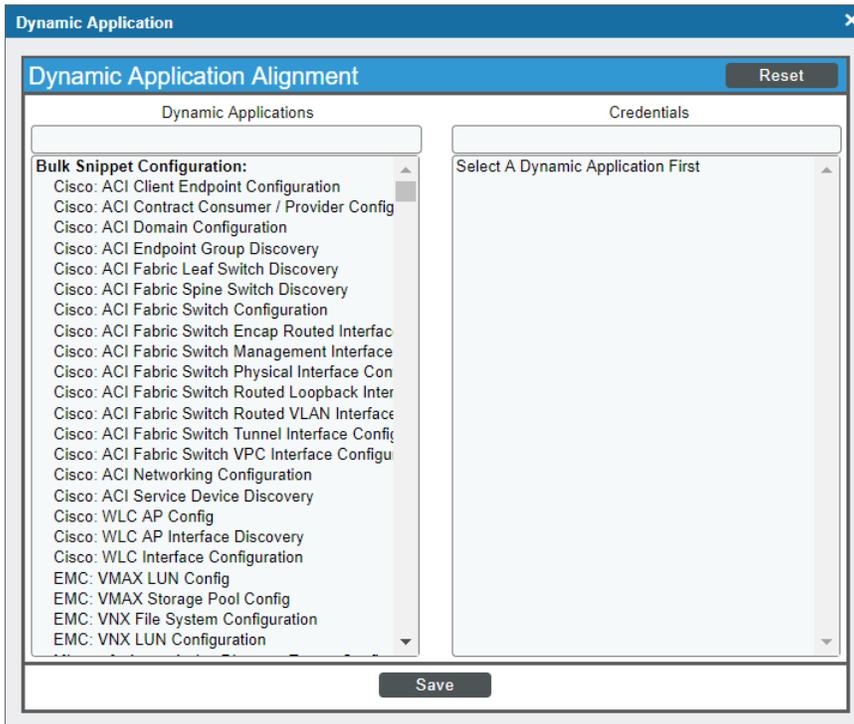


2. In the **Dynamic Applications** field, select the Dynamic Application you want to align.
3. In the **Credentials** field, select the credential specified in the table.
4. Click the **[Save]** button.
5. Repeat steps 1-4 for the other unaligned Dynamic Applications.

## Viewing Dell EMC Isilon Component Devices

In addition to the **Device Manager** page (Registry > Devices > Device Manager), you can view the Isilon storage devices in the following places in the user interface:


- The **Device View** modal page (click the bar-graph icon  for a device, then click the **Topology** tab) displays a map of a particular device and all of the devices with which it has parent-child relationships. Double-clicking any of the devices listed reloads the page to make the selected device the primary device:

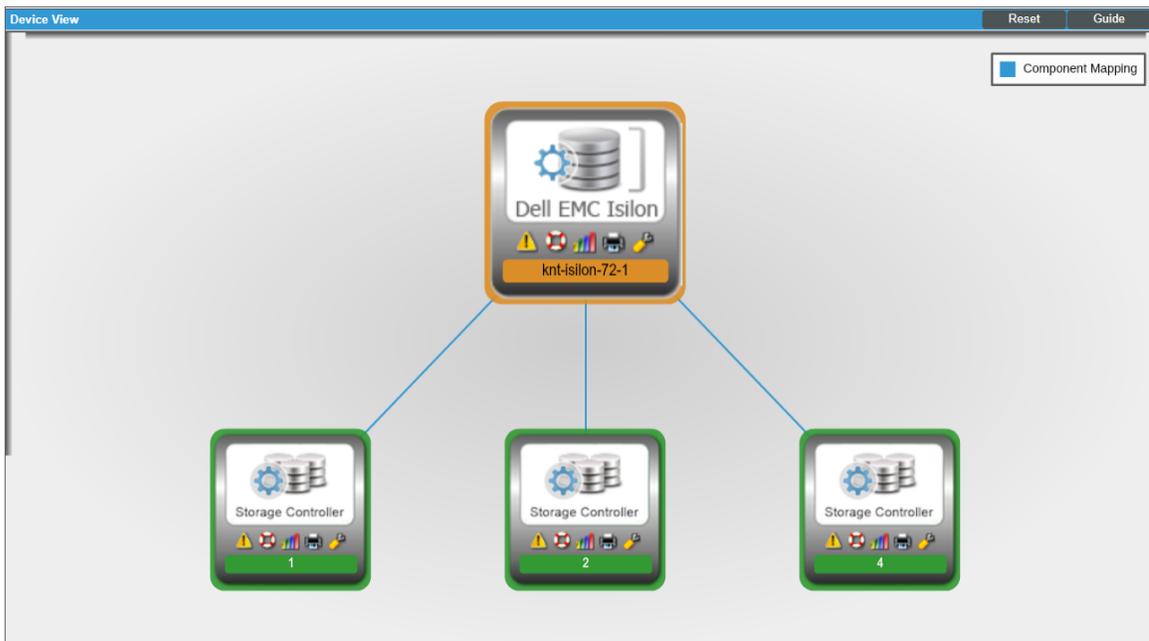

- The **Device Components** page (Registry > Devices > Device Components) displays a list of all root devices and component devices discovered by the ScienceLogic platform in an indented view, so you can easily view the hierarchy and relationships between child devices, parent devices, and root devices. To view the component devices associated with Dell EMC Isilon, find the Isilon component device and click its plus icon (+):

Device Name	IP Address	Device Category	Device Class   Sub-class	DID	Organization	Current State	Collection Group	Collection State
1 - knt-isilon-72-1	10.2.5.16	Array	Dell EMC   Isilon Storage System	516	knights_isilon	Major	CUG_Automation	Active
1. 1	--	Controller	Dell EMC   Isilon Node	517	knights_isilon	Healthy	CUG_Automation	Active
2. 2	--	Controller	Dell EMC   Isilon Node	519	knights_isilon	Healthy	CUG_Automation	Active
3. 4	--	Controller	Dell EMC   Isilon Node	518	knights_isilon	Healthy	CUG_Automation	Active

- The **Component Map** page (Views > Device Maps > Components) allows you to view devices by root node and view the relationships between root nodes, parent components, and child components in a map. This makes it easy to visualize and manage root nodes and their components. The ScienceLogic platform automatically updates the **Component Map** as new component devices are discovered. The platform also updates each map with the latest status and event information. To view the map for an Dell EMC Isilon arrays, go to the **Component Map** page and select the map from the list in the left NavBar. To learn more about the **Component Map** page, see the **Views** manual.

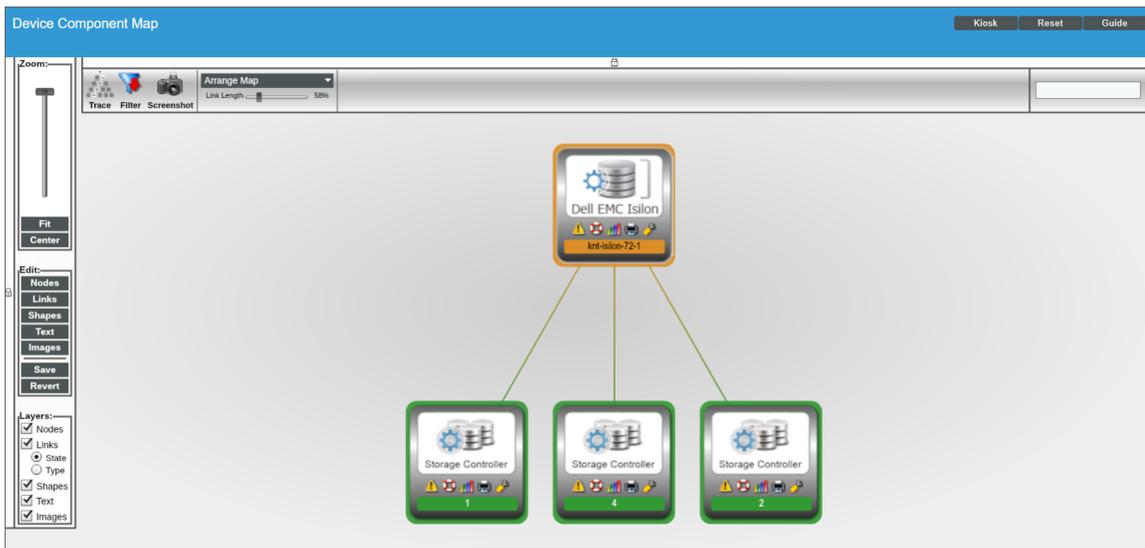

© 2003 - 2017, ScienceLogic, Inc.

All rights reserved.

#### LIMITATION OF LIABILITY AND GENERAL DISCLAIMER

ALL INFORMATION AVAILABLE IN THIS GUIDE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED. SCIENCELOGIC™ AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.

Although ScienceLogic™ has attempted to provide accurate information on this Site, information on this Site may contain inadvertent technical inaccuracies or typographical errors, and ScienceLogic™ assumes no responsibility for the accuracy of the information. Information may be changed or updated without notice. ScienceLogic™ may also make improvements and / or changes in the products or services described in this Site at any time without notice.

#### Copyrights and Trademarks

ScienceLogic, the ScienceLogic logo, and EM7 are trademarks of ScienceLogic, Inc. in the United States, other countries, or both.

Below is a list of trademarks and service marks that should be credited to ScienceLogic, Inc. The ® and ™ symbols reflect the trademark registration status in the U.S. Patent and Trademark Office and may not be appropriate for materials to be distributed outside the United States.

- ScienceLogic™
- EM7™ and em7™
- Simplify IT™
- Dynamic Application™
- Relational Infrastructure Management™

The absence of a product or service name, slogan or logo from this list does not constitute a waiver of ScienceLogic's trademark or other intellectual property rights concerning that name, slogan, or logo.

Please note that laws concerning use of trademarks or product names vary by country. Always consult a local attorney for additional guidance.

#### Other

If any provision of this agreement shall be unlawful, void, or for any reason unenforceable, then that provision shall be deemed severable from this agreement and shall not affect the validity and enforceability of any remaining provisions. This is the entire agreement between the parties relating to the matters contained herein.

In the U.S. and other jurisdictions, trademark owners have a duty to police the use of their marks. Therefore, if you become aware of any improper use of ScienceLogic Trademarks, including infringement or counterfeiting by third parties, report them to Science Logic's legal department immediately. Report as much detail as possible about the misuse, including the name of the party, contact information, and copies or photographs of the potential misuse to: [legal@sciencelogic.com](mailto:legal@sciencelogic.com)



800-SCI-LOGIC (1-800-724-5644)

International: +1-703-354-1010