



Monitoring Cisco ACI Multi-Site Manager

Cisco: ACI Multi-Site Manager PowerPack version 103

Table of Contents

Introduction	3
What Does the Cisco: ACI Multi-Site Manager PowerPack Monitor?	3
Installing the Cisco: ACI Multi-Site Manager PowerPack	4
Configuration and Discovery	5
Prerequisites	5
Creating a Credential for Cisco ACI Multi-Site Manager	5
Creating a Credential for Cisco ACI Multi-Site Manager in the SL1 Classic User Interface	7
Creating a Cisco ACI Multi-Site Manager Virtual Device and Discovering Cisco ACI Multi-Site	7
Verifying Discovery and Dynamic Application Alignment	8
Verifying Discovery and Dynamic Application Alignment in the SL1 Classic User Interface	9
Viewing Component Devices	10

Chapter

1

Introduction

Overview

This manual describes how to monitor Cisco ACI Multi-Site architectures in SL1 using the "Cisco: ACI Multi-Site Manager" PowerPack.

The following sections provide an overview of Cisco ACI Multi-Site Manager and the "Cisco: ACI Multi-Site Manager" PowerPack:

This chapter covers the following topics:

What Does the Cisco: ACI Multi-Site Manager PowerPack Monitor?	3
Installing the Cisco: ACI Multi-Site Manager PowerPack	4

NOTE: ScienceLogic provides this documentation for the convenience of ScienceLogic customers. Some of the configuration information contained herein pertains to third-party vendor software that is subject to change without notice to ScienceLogic. ScienceLogic makes every attempt to maintain accurate technical information and cannot be held responsible for defects or changes in third-party vendor software. There is no written or implied guarantee that information contained herein will work for all third-party variants. See the End User License Agreement (EULA) for more information.

What Does the Cisco: ACI Multi-Site Manager PowerPack Monitor?

To monitor Cisco ACI Multi-Site architectures using SL1, you must install the "Cisco: ACI Multi-Site Manager" PowerPack. This PowerPack enables you to discover, model, and collect data about Cisco ACI Multi-Site architectures.

The "Cisco: ACI Multi-Site Manager" PowerPack includes:

- A sample credential you can use as a template to create a SOAP/XML credential to connect to the Cisco ACI Multi-Site architecture you want to monitor
- Dynamic Applications to discover, model, and monitor performance metrics and/or collect configuration data
- Device Classes for each type of ACI Multi-Site Manager device monitored
- Event Policies and corresponding alerts that are triggered when ACI Multi-Site Manager devices meet certain status criteria

Installing the Cisco: ACI Multi-Site Manager PowerPack

Before completing the steps in this manual, you must import and install the latest version of the "Cisco: ACI Multi-Site Manager" PowerPack.

TIP: By default, installing a new version of a PowerPack overwrites all content from a previous version of that PowerPack that has already been installed on the target system. You can use the **Enable Selective PowerPack Field Protection** setting in the **Behavior Settings** page (System > Settings > Behavior) to prevent new PowerPacks from overwriting local changes for some commonly customized fields. For more information, see the section on [Global Settings](#).

NOTE: For details on upgrading SL1, see the relevant [SL1 Platform Release Notes](#).

To download and install the PowerPack:

1. Search for and download the PowerPack from the **PowerPacks** page (Product Downloads > PowerPacks & SyncPacks) at the [ScienceLogic Support Site](#).
2. In SL1, go to the **PowerPacks** page (System > Manage > PowerPacks).
3. Click the **[Actions]** button and choose *Import PowerPack*. The **Import PowerPack** dialog box appears.
4. Click **[Browse]** and navigate to the PowerPack file from step 1.
5. Select the PowerPack file and click **[Import]**. The **PowerPack Installer** modal displays a list of the PowerPack contents.
6. Click **[Install]**. The PowerPack is added to the **PowerPacks** page.

NOTE: If you exit the **PowerPack Installer** modal without installing the imported PowerPack, the imported PowerPack will not appear in the **PowerPacks** page. However, the imported PowerPack will appear in the **Imported PowerPacks** modal. This page appears when you click the **[Actions]** menu and select *Install PowerPack*.

Chapter

2

Configuration and Discovery

Overview

The following sections describe how to configure and discover Cisco ACI Multi-Site Manager for monitoring by SL1 using the "Cisco: ACI Multi-Site Manager" PowerPack:

This chapter covers the following topics:

<i>Prerequisites</i>	5
<i>Creating a Credential for Cisco ACI Multi-Site Manager</i>	5
<i>Creating a Cisco ACI Multi-Site Manager Virtual Device and Discovering Cisco ACI Multi-Site</i>	7
<i>Verifying Discovery and Dynamic Application Alignment</i>	8
<i>Viewing Component Devices</i>	10

Prerequisites

Before you can monitor Cisco ACI Multi-Site Manager in SL1, you must do the following:

- Your Data Collector must have API access to the Cisco ACI Multi-Site Manager Orchestrator
- The API user needs permissions for "auth", "get token", and "poll" for metrics

Creating a Credential for Cisco ACI Multi-Site Manager

To configure SL1 to monitor Cisco ACI Multi-Site architecture, you must first create a SOAP/XML credential. This credential allows the Dynamic Applications in the "Cisco: ACI Multi-Site Manager" PowerPack to communicate with your Cisco ACI Multi-Site account.

The PowerPack includes an example SOAP/XML credential that you can edit for your own use.

NOTE: If you are using an SL1 system prior to version 11.1.0, the new user interface does not include the **Duplicate** option for sample credential(s). ScienceLogic recommends that you use [the classic user interface and the Save As button](#) to create new credentials from sample credentials. This will prevent you from overwriting the sample credential(s).

To configure a SOAP/XML credential:

1. Go to the **Credentials** page (Manage > Credentials).
2. Locate the **Cisco: ACI MM Sample Credential** credential, click its **[Actions]** icon (**☰**) and select **Duplicate**. A copy of the credential appears.
3. Click the **[Actions]** icon (**☰**) for the "Cisco: ACI MM Sample Credential copy" credential and select **Edit**. The **Edit Credential** page appears:

4. Enter values in the following fields:
 - **Name**. Type a new name for the credential.
 - **All Organizations**. Toggle on (blue) to align the credential to all organizations, or toggle off (gray) and then select one or more specific organizations from the **Select the organizations the credential belongs to** drop-down field to align the credential with those specific organizations.
 - **URL**. Specify the IP of the Cisco ACI Multi-Site web interface
 - **HTTP Auth User**. Enter the username for the Cisco ACI Multi-Site web interface
 - **HTTP Auth Password**. Enter the password for the Cisco ACI Multi-Site web interface
5. Click the **[Save & Close]** button.

Creating a Credential for Cisco ACI Multi-Site Manager in the SL1 Classic User Interface

To configure SL1 to monitor Cisco ACI Multi-Site architecture, you must first create a SOAP/XML credential. This credential allows the Dynamic Applications in the "Cisco: ACI Multi-Site Manager" PowerPack to communicate with your Cisco ACI Multi-Site account.

The PowerPack includes an example SOAP/XML credential that you can edit for your own use.

To configure a SOAP/XML credential:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Locate the **Cisco: ACI MM Sample Credential** credential, then click its wrench icon (🔧). The **Edit SOAP/XML Credential** modal page appears.
3. Enter values in the following fields:

The screenshot shows the 'Edit SOAP/XML Credential #99' dialog box. The 'Basic Settings' section contains the following fields: Profile Name (Cisco: ACI MM Sample Credential), Content Encoding (text/xml), Method (POST), HTTP Version (HTTP/1.1), URL (https://198.18.135.71), HTTP Auth User (admin), HTTP Auth Password (masked), and Timeout (20). The 'Soap Options' section includes an Embedded Password field and four Embed Value fields (Embed Value [%1] to [%4]). The 'Proxy Settings' section includes fields for Hostname/IP, Port (0), and User. The 'CURL Options' section includes a list of options (CAINFO, CAPATH, CLOSEPOLICY, CONNECTTIMEOUT, COOKIE, COOKIEFILE, COOKIEJAR, COOKIELIST, CURL) and a large text area. The 'HTTP Headers' section includes a '+ Add a header' button and two header entries: 'Content-Type: application/json' and '%silo_token=Authorization:Bearer'. At the bottom of the dialog are 'Save' and 'Save As' buttons.

Basic Settings

- **HTTP Auth User.** Enter the username for the Cisco ACI Multi-Site web interface
- **HTTP Auth Password.** Enter the password for the Cisco ACI Multi-Site web interface
- **URL.** Specify the IP of the Cisco ACI Multi-Site web interface

4. Click the **[Save As]** button.

Creating a Cisco ACI Multi-Site Manager Virtual Device and Discovering Cisco ACI Multi-Site

To discover a Cisco ACI Multi-Site architecture, you must create a **virtual device** that represents the root device. A virtual device is a user-defined container that represents a device or service that cannot be discovered by SL1.

You can use the virtual device to store information gathered by policies or Dynamic Applications.

TIP: If you have multiple Cisco ACI Multi-Site architecture you want to monitor, you should create a separate virtual device for each root device. You can also create different organizations for each architecture.

To create a virtual device that represents your Cisco ACI Multi-Site architecture:

1. Go to the **Device Manager** page (Devices > Classic Devices, or Registry > Devices > Device Manager in the classic SL1 user interface).
2. Click the **[Actions]** button and select *Create Virtual Device* from the menu. The **Create Virtual Device** modal page appears.
3. Enter values in the following fields:
 - **Device Name.** Enter a name for the device. For example, you could enter "ACI Multi-Site" in this field.
 - **Organization.** Select the organization for this device. The organization you associate with the device limits the users that will be able to view and edit the device. Typically, only members of the organization will be able to view and edit the device.
 - **Device Class.** Select *Cisco Systems | ACI Multi-Site Manager Cluster*.
 - **Collector.** Select *CUG*.
4. Click the **[Add]** button to create the virtual device.
5. Once you have created the device, go to the **Device Manager** page (Devices > Classic Devices, or Registry > Devices > Device Manager in the classic SL1 user interface) and select the virtual device you created.
6. In the **Select Action** menu, select *MODIFY By Template* and click **[Go]**.
7. In the **Device Template Editor** window, select the **[Dyn Apps]** tab.
8. Select *Cisco: ACI Multi-Site Manager Template* from the **Template** field.
9. In the **Credentials** field, verify that the credential *Cisco: ACI MM Sample Credential* is selected. Click **[Apply]**.
10. Click **[Confirm]**.

Once you have completed modifying the device template, discovery will run and the Dynamic Applications will be aligned.


Verifying Discovery and Dynamic Application Alignment

To verify that SL1 has automatically aligned the correct Dynamic Applications during discovery:

1. After creating the virtual device and aligning the credential to the template, go to the **Devices** page and click on the ACI Multi-Site virtual device. From the **Device Investigator** page, click the **[Collections]** tab.
2. All applicable Dynamic Applications for the switch are automatically aligned during discovery and will appear in the **[Collections]** tab.

You should see the following Dynamic Applications aligned to the ACI Multi-Site virtual device:

- Cisco: ACI Multi-Site Manager Component Counts
- Cisco: ACI Multi-Site Manager Node Discovery
- Cisco: ACI Multi-Site Manager Site Discovery
- Cisco: ACI Multi-Site Manager Tenant Discovery
- Cisco: ACI Multi-Site Manager Token

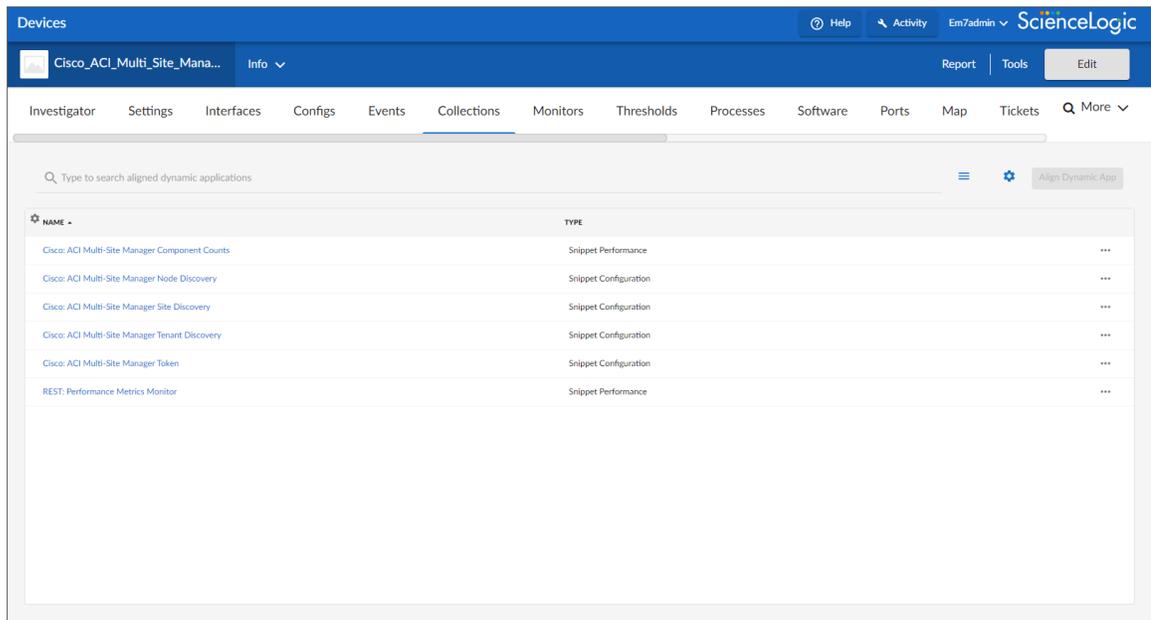

The following Dynamic Applications will automatically align to their corresponding device components:

- Cisco: ACI Multi-Site Manager Node Configuration
- Cisco: ACI Multi-Site Manager Site Config
- Cisco: ACI Multi-Site Manager Site Performance
- Cisco: ACI Multi-Site Manager Tenant Config

Verifying Discovery and Dynamic Application Alignment in the SL1 Classic User Interface

To verify that SL1 has automatically aligned the correct Dynamic Applications during discovery:

1. After creating the virtual device and aligning the credential to the template, go to the **Device Manager** page and click the wrench icon (🔧) for the ACI Multi-Site virtual device. From the **Device Properties** page, click the **[Collections]** tab. The **Dynamic Application Collections** page appears.
2. All applicable Dynamic Applications for the switch are automatically aligned during discovery.

You should see the following Dynamic Applications aligned to the ACI Multi-Site virtual device:

- Cisco: ACI Multi-Site Manager Component Counts
- Cisco: ACI Multi-Site Manager Node Discovery

- Cisco: ACI Multi-Site Manager Site Discovery
- Cisco: ACI Multi-Site Manager Tenant Discovery
- Cisco: ACI Multi-Site Manager Token


The following Dynamic Applications will automatically align to their correspondent device components:

- Cisco: ACI Multi-Site Manager Node Configuration
- Cisco: ACI Multi-Site Manager Site Config
- Cisco: ACI Multi-Site Manager Site Performance
- Cisco: ACI Multi-Site Manager Tenant Config

Viewing Component Devices

In addition to the **Devices** page, you can view the Cisco ACI Multi-Site Manager and all associated component devices in the following places in the user interface:


- The **Device Investigator** Map page (click **Map** in the **Device Investigator** page) displays a map of a particular device and all of the devices with which it has parent-child relationships. Double-clicking any of the listed devices reloads the page to make the selected device the primary device.

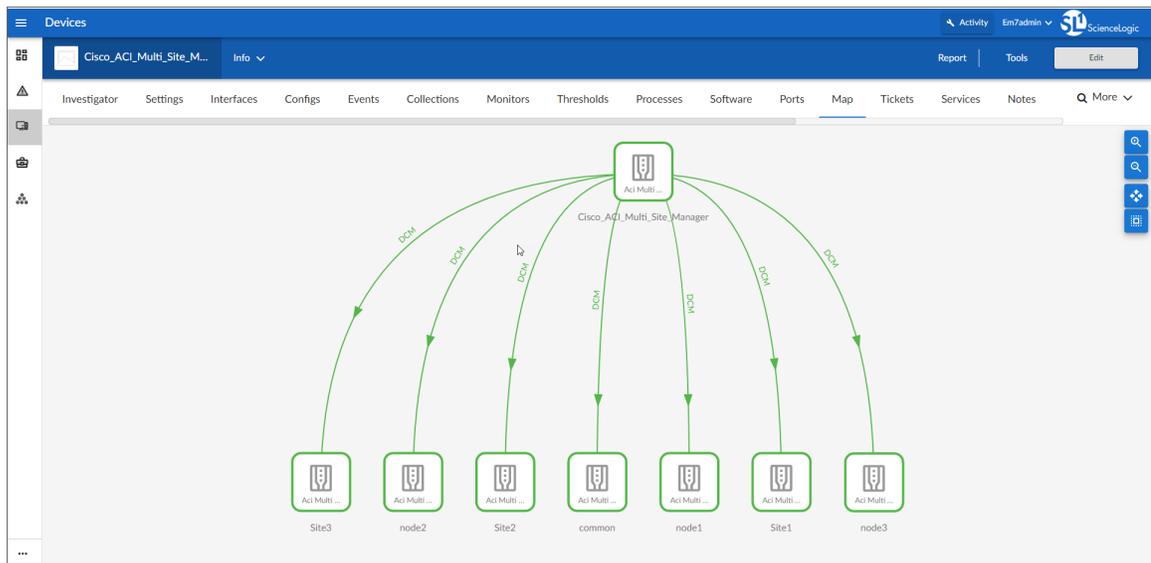

- The **Device Components** page (Devices > Device Components) displays a list of all root devices and component devices discovered by SL1 in an indented view, so you can easily view the hierarchy and relationships between child devices, parent devices, and root devices. To view the component devices associated with a Cisco ACI Multi-Site Manager, find the virtual device and click its plus icon (+):

Device Name	IP Address	Device Category	Device Class / Sub-class	DID	Organization	Current State	Collection Status	Collection State
1. Cisco_ACI_Multi_Site_Manager	--	Infrastructure	Cisco Systems ACI Multi-Site Manager Cluster	9	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
1. common	--	Application	Cisco Systems ACI Multi-Site Manager Tenant	13	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
2. node1	--	Application	Cisco Systems ACI Multi-Site Manager Node	14	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
3. node2	--	Application	Cisco Systems ACI Multi-Site Manager Node	11	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
4. node3	--	Application	Cisco Systems ACI Multi-Site Manager Node	16	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
5. node4	--	Application	Cisco Systems ACI Multi-Site Manager Node	15	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
6. Site1	--	Application	Cisco Systems ACI Multi-Site Manager Site	12	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active
7. Site2	--	Application	Cisco Systems ACI Multi-Site Manager Site	10	Cisco_ACI_Multi_Site_Manager	Healthy	CUG	Active

- The **Component Map** page (Classic Maps > Device Maps > Components) allows you to view devices by root node and view the relationships between root nodes, parent components, and child components in a map. This makes it easy to visualize and manage root nodes and their components. SL1 automatically updates the **Component Map** as new component devices are discovered. The platform also updates each map with the latest status and event information. To view the map for a Cisco ACI Multi-Site Manager device, go to the **Component Map** page and select the map from the list in the left NavBar. To learn more about the **Component Map** page, see the **Maps** manual.

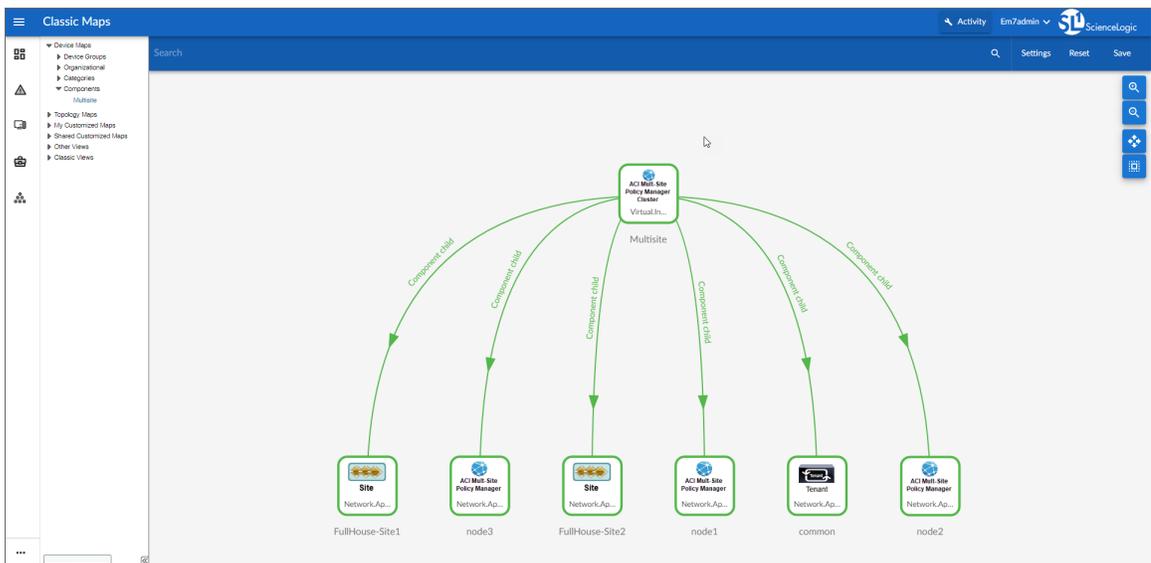

© 2003 - 2025, ScienceLogic, Inc.

All rights reserved.

LIMITATION OF LIABILITY AND GENERAL DISCLAIMER

ALL INFORMATION AVAILABLE IN THIS GUIDE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED. SCIENCELOGIC™ AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.

Although ScienceLogic™ has attempted to provide accurate information on this Site, information on this Site may contain inadvertent technical inaccuracies or typographical errors, and ScienceLogic™ assumes no responsibility for the accuracy of the information. Information may be changed or updated without notice. ScienceLogic™ may also make improvements and / or changes in the products or services described in this Site at any time without notice.

Copyrights and Trademarks

ScienceLogic, the ScienceLogic logo, and EM7 are trademarks of ScienceLogic, Inc. in the United States, other countries, or both.

Below is a list of trademarks and service marks that should be credited to ScienceLogic, Inc. The ® and ™ symbols reflect the trademark registration status in the U.S. Patent and Trademark Office and may not be appropriate for materials to be distributed outside the United States.

- ScienceLogic™
- EM7™ and em7™
- Simplify IT™
- Dynamic Application™
- Relational Infrastructure Management™

The absence of a product or service name, slogan or logo from this list does not constitute a waiver of ScienceLogic's trademark or other intellectual property rights concerning that name, slogan, or logo.

Please note that laws concerning use of trademarks or product names vary by country. Always consult a local attorney for additional guidance.

Other

If any provision of this agreement shall be unlawful, void, or for any reason unenforceable, then that provision shall be deemed severable from this agreement and shall not affect the validity and enforceability of any remaining provisions. This is the entire agreement between the parties relating to the matters contained herein.

In the U.S. and other jurisdictions, trademark owners have a duty to police the use of their marks. Therefore, if you become aware of any improper use of ScienceLogic Trademarks, including infringement or counterfeiting by third parties, report them to Science Logic's legal department immediately. Report as much detail as possible about the misuse, including the name of the party, contact information, and copies or photographs of the potential misuse to: legal@sciencelogic.com. For more information, see <https://sciencelogic.com/company/legal>.

ScienceLogic

800-SCI-LOGIC (1-800-724-5644)

International: +1-703-354-1010