



Monitoring SQL Servers

Microsoft: SQL Server Enhanced PowerPack version 101, revision 2

Table of Contents

Introduction	3
What Does the Microsoft: SQL Server Enhanced PowerPack Monitor?	3
Installing the Microsoft: SQL Server Enhanced PowerPack	4
Configuring Microsoft SQL Servers for Monitoring	6
Prerequisites for Monitoring SQL Servers	7
Creating a PowerShell SQL Server Credential	7
Discovering SQL Servers	9
Viewing SQL Server Component Devices	10

Introduction

Overview

This manual describes how to monitor Microsoft SQL Servers in the ScienceLogic platform using the *Microsoft: SQL Server Enhanced PowerPack*.

The following sections provide an overview of SQL Servers and the *Microsoft: SQL Server Enhanced PowerPack*:

<i>What Does the Microsoft: SQL Server Enhanced PowerPack Monitor?</i>	3
<i>Installing the Microsoft: SQL Server Enhanced PowerPack</i>	4

NOTE: ScienceLogic provides this documentation for the convenience of ScienceLogic customers. Some of the configuration information contained herein pertains to third-party vendor software that is subject to change without notice to ScienceLogic. ScienceLogic makes every attempt to maintain accurate technical information and cannot be held responsible for defects or changes in third-party vendor software. There is no written or implied guarantee that information contained herein will work for all third-party variants. See the End User License Agreement (EULA) for more information.

What Does the Microsoft: SQL Server Enhanced PowerPack Monitor?

The *Microsoft: SQL Server Enhanced PowerPack* enables you to discover, model, and collect data about SQL 2008, 2012, 2014, and 2016 servers and their component devices.

The *Microsoft: SQL Server Enhanced* PowerPack includes:

- An example credential you can use to create PowerShell credentials to connect to SQL Servers
- Dynamic Applications to discover and monitor SQL Servers and their component devices
- Device Classes for each type of SQL Server component device monitored by the ScienceLogic platform
- Event Policies and corresponding alerts that are triggered when SQL Servers and their component devices meet certain status criteria

NOTE: The *Microsoft: SQL Server Enhanced* PowerPack does not support the ability to monitor SQL Server clusters. Therefore, the SQL Servers that you monitor must not use Windows Server Failover Clustering (WSFC) or SQL Server Failover Cluster Instances (FCI) for high-availability.


Installing the Microsoft: SQL Server Enhanced PowerPack

Before completing the steps in this manual, you must import and install the latest version of the *Microsoft: SQL Server Enhanced* PowerPack.

TIP: By default, installing a new version of a PowerPack overwrites all content in that PowerPack that has already been installed on the target system. You can use the **Enable Selective PowerPack Field Protection** setting in the **Behavior Settings** page (System > Settings > Behavior) to prevent new PowerPacks from overwriting local changes for some commonly customized fields. (For more information, see the **System Administration** manual.)

To download and install a PowerPack:

1. Download the PowerPack from the [ScienceLogic Customer Portal](#).
2. Go to the **PowerPack Manager** page (System > Manage > PowerPacks).
3. In the **PowerPack Manager** page, click the **[Actions]** button, then select *Import PowerPack*.
4. The **Import PowerPack** dialog box appears:

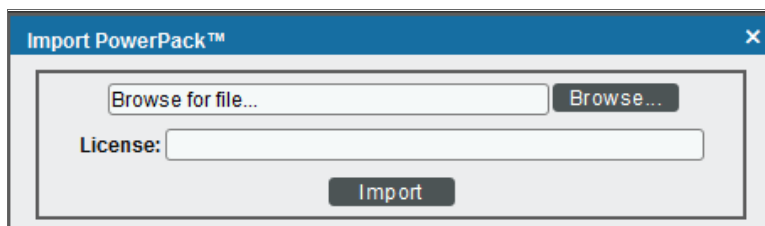

5. Click the **[Browse]** button and navigate to the PowerPack file.
6. When the **PowerPack Installer** modal page appears, click the **[Install]** button to install the PowerPack.

NOTE: If you exit the **PowerPack Installer** modal page without installing the imported PowerPack, the imported PowerPack will not appear in the **PowerPack Manager** page. However, the imported PowerPack will appear in the **Imported PowerPacks** modal page. This page appears when you click the **[Actions]** menu and select *Install PowerPack*.

Configuring Microsoft SQL Servers for Monitoring

Overview

The following sections describe how to configure and discover Microsoft SQL Servers for monitoring in the ScienceLogic platform using the *Microsoft: SQL Server Enhanced* PowerPack:

<i>Prerequisites for Monitoring SQL Servers</i>	7
<i>Creating a PowerShell SQL Server Credential</i>	7
<i>Discovering SQL Servers</i>	9
<i>Viewing SQL Server Component Devices</i>	10

NOTE: If you already have Windows Server discovered, you might not need to create a new SQL Server credential or run a separate discovery session for SQL Servers if the PowerShell credential information is the same as that used for the Windows Server credential. In this scenario, you need only to install the *Microsoft: SQL Server Enhanced* PowerPack and ensure that the Windows user account used in the credential has the appropriate permissions, as outlined in the [Prerequisites](#) section.

Prerequisites for Monitoring SQL Servers

To configure the ScienceLogic system to monitor SQL servers using the *Microsoft: SQL Server Enhanced PowerPack*, you must first have the following information about the SQL Servers that you want to monitor:

- IP addresses and ports for the SQL Servers
- Username and password for a Windows user account with access to the SQL Servers

The SQL Servers that you monitor must be running PowerShell version 3.0 or later.

In addition, version 101 of the *Microsoft: SQL Server Enhanced PowerPack* requires the following permissions for the user account used for monitoring:

- SQL 2014 and SQL 2016 require one of the following configurations:
 - The user account has the PUBLIC role. The user must have the DB_DATAREADER permission in every existing and new database, as well as the msdb database. The user must also have the VIEW SERVER STATE permission for each SQL Server Instance.
 - The user account has the PUBLIC role and a custom role that includes the Connect Any Database permission. The custom role configuration must be performed in every monitored SQL Server Instance. In addition, the user must have the DB_DATAREADER permission in the msdb database, and the VIEW SERVER STATE permission for each SQL Server Instance.
 - The user account has the SYSADMIN role.
- SQL 2008 and SQL 2012 require one of the following configurations:
 - The user account has the PUBLIC role. The user must have the DB_DATAREADER permission in every existing and new database, as well as the msdb database. The user must also have the VIEW SERVER STATE permission for each SQL Server Instance.
 - The user account has the SYSADMIN role.

NOTE: If your user account is configured with the PUBLIC role and DB_DATAREADER permission, all databases in an instance must have the DB_DATAREADER permission applied.
--

Creating a PowerShell SQL Server Credential

To configure the ScienceLogic platform to monitor SQL Servers, you must first create a PowerShell credential. This credential allows the Dynamic Applications in the *Microsoft: SQL Server Enhanced PowerPack* to connect with an SQL Server. An example PowerShell credential that you can edit for your own use is included in the PowerPack.

To create a PowerShell credential for an SQL Server:

1. Go to the **Credential Management** page (System > Manage > Credentials).

2. Locate the **SQL PowerShell - Example** credential, and then click its wrench icon (🔧). The **Edit PowerShell Credential** modal page appears.
3. Complete the following fields:

Credential Editor [72]

Edit PowerShell Credential #72 New Reset

Basic Settings

Profile Name: SQL PowerShell - Example Account Type: [Active Directory]

Hostname/IP: %D Timeout(ms): 180000

Username: USER_NAME_GOES_HERE Password:

Encrypted: no Port: 5985 PowerShell Proxy Hostname/IP:

Active Directory Settings

Active Directory Hostname/IP: AD_HOSTNAME_GOES_HERE Domain: DOMAIN_GOES_HERE

Save Save As

- **Profile Name.** Type a new name for your SQL Server credential.
- **Account Type.** Select *Active Directory*.
- **Hostname/IP.** Type "%D".
- **Timeout.** Type "18000".
- **Username.** Type the username for a Windows user with access to the SQL Server.
- **Password.** Type the password for the Windows account username.

NOTE: The user account whose username and password are provided in the credential must have certain permissions in all SQL Server instances that the ScienceLogic platform will monitor. For a list of these permissions, see the [Prerequisites](#) section.

- **Encrypted.** Select *no*.
- **Port.** Type "5985".
- **PowerShell Proxy Hostname/IP.** Leave this field blank.
- **Active Directory Hostname/IP.** Specify the hostname or IP address of the Active Directory server that will authenticate the credential.
- **Domain.** Specify the domain where the monitored SQL Server resides.

4. Click the **[Save As]** button.
5. When the confirmation message appears, click **[OK]**.

Discovering SQL Servers

When you discover SQL Servers in the ScienceLogic platform, the platform auto-aligns a series of Dynamic Applications to discover, configure, and monitor the following SQL Server component devices:

- SQL Servers
 - SQL Server instances
 - SQL Server databases

To discover SQL Servers and their component devices, perform the following steps:

1. Go to the **Discovery Control Panel** page (System > Manage > Discovery).
2. Click the **[Create]** button. The **Discovery Session Editor** page appears:

The screenshot displays the 'Discovery Session Editor | Editing Session [9]' window. It features a top bar with 'New' and 'Reset' buttons. The main area is divided into several sections:

- Identification Information:** Includes fields for 'Name' (MSTL12R2.com_single) and 'Description'.
- IP and Credentials:** Contains an 'IP Address/Hostname Discovery List' with the value '10.40.3.4', an 'Upload File' button, and a 'Browse...' button. Below this is the 'SNMP Credentials' section with a list of options including 'c0sm0s', 'c0sm0s (Longer Timeout)', 'Cisco SNMPv2 - Example', 'Cisco SNMPv3 - Example', 'EM7 Default V2', 'EM7 Default V3', 'IPSLA Example', and 'LifeSize: Endpoint SNMP'. There is also an 'Other Credentials' section with a list including 'LDAP/AD', 'QA-Silo AD', 'PowerShell', and 'MSTL12R2.com'.
- Detection and Scanning:** Includes dropdowns for 'Initial Scan Level', 'Scan Throttle', 'Port Scan All IPs', and 'Port Scan Timeout', all set to '[System Default (recommended)]'. Below these is the 'Detection Method & Port' section with a list of methods including 'UDP: 161 SNMP', 'TCP: 1 - tcpmux', 'TCP: 2 - compressnet', 'TCP: 3 - compressnet', 'TCP: 5 - rje', 'TCP: 7 - echo', 'TCP: 9 - discard', 'TCP: 11 - systat', 'TCP: 13 - daytime', and 'TCP: 17 - qotd'. It also has input fields for 'Interface Inventory Timeout (ms)' (600000) and 'Maximum Allowed Interfaces' (10000), and a 'Bypass Interface Inventory' checkbox.
- Basic Settings:** Includes checkboxes for 'Discover Non-SNMP' (checked), 'Model Devices' (checked), 'DHCP' (unchecked), and 'Duplication Protection' (checked). It also has a 'Collection Server PID' dropdown set to '3', an 'Organization' dropdown set to '[PS]', and an 'Add Devices to Device Group(s)' section with a message 'Please create a device group first'. At the bottom, there is an 'Apply Device Template' dropdown set to '[Choose a Template]'.


At the bottom of the window, there are 'Save' and 'Save As' buttons, and a 'Log All' checkbox which is checked.

3. Supply values in the following fields:
 - **IP Address/Hostname Discovery List.** Type the IP addresses or the range of IP addresses for the SQL Servers you want to discover.
 - **Other Credentials.** Select the [PowerShell credential you created](#).
 - **Discover Non-SNMP.** Because the discovery session is not using an SNMP credential, select this checkbox.
4. Optionally, supply values in the other fields in this page. For a description of the fields in this page, see the **Discovery & Credentials** manual.
5. Click the **[Save]** button.
6. The **Discovery Control Panel** page will refresh. Click the lightning bolt icon (⚡) for the discovery session you created.
7. In the pop-up window that appears, click the **[OK]** button. The **Discovery Session** page displays the progress of the discovery session.

Viewing SQL Server Component Devices

In addition to the **Device Manager** page (Registry > Devices > Device Manager), you can view the SQL Server and all associated component devices in the following places in the user interface:


- The **Device View** modal page displays a map of a particular device and all of the devices with which it has parent-child relationships. Double-clicking any of the devices listed reloads the page to make the selected device the primary device:

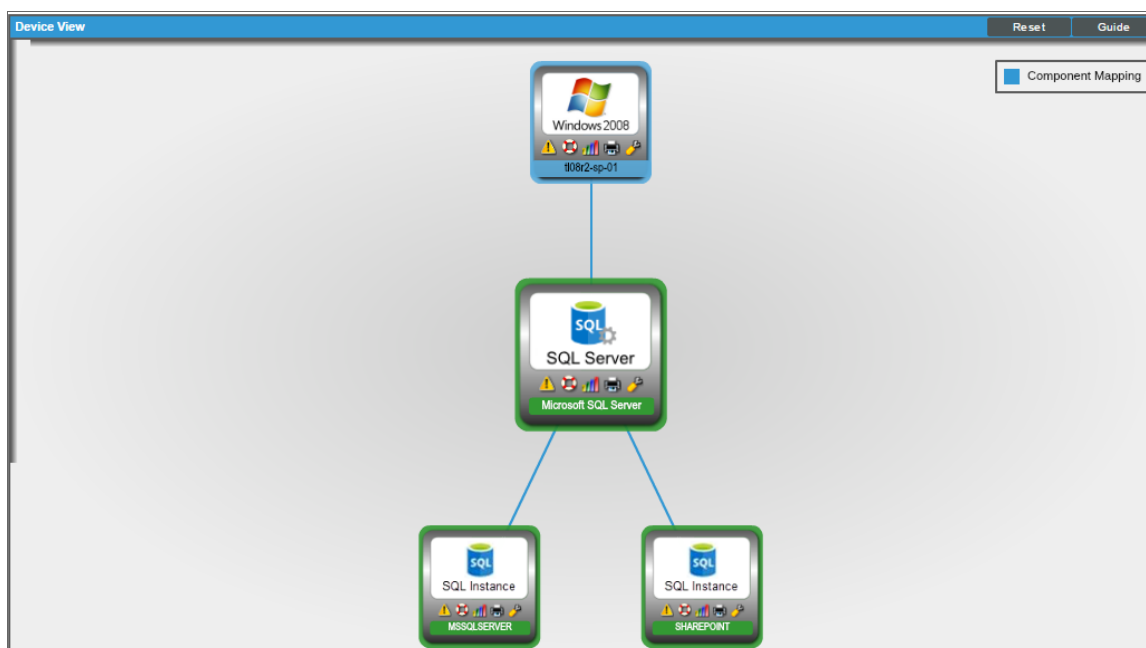

- The **Device Components** page (Registry > Devices > Device Components) displays a list of all root devices and component devices discovered by the ScienceLogic platform in an indented view, so you can easily view the hierarchy and relationships between child devices, parent devices, and root devices. To view the component devices associated with a SQL Server, find the server and click its plus icon (+):

Device Name	IP Address	Device Category	Device Class / Sub-class	DID	Organization	Current State	Collection Group	Collection State
Office 365 Root	10.40.2.6	Servers	Microsoft Office 365 Root	1165	PS	Minor	CUG1	Active
Microsoft SQL Server	--	Servers	Microsoft SQL Server	1176	PS	Healthy	CUG1	Active
MSSQLSERVER	--	Controller	Microsoft SQL Server Instance	1179	PS	Healthy	CUG1	Active
SHAREPOINT	--	Controller	Microsoft SQL Server Instance	1180	PS	Healthy	CUG1	Active
master	--	Volume	Microsoft SQL Server Database	1187	PS	Healthy	CUG1	Active
model	--	Volume	Microsoft SQL Server Database	1184	PS	Healthy	CUG1	Active
msdb	--	Volume	Microsoft SQL Server Database	1189	PS	Healthy	CUG1	Active
tempdb	--	Volume	Microsoft SQL Server Database	1186	PS	Healthy	CUG1	Active
10.40.2-sq-01	10.40.2.4	Servers	Microsoft Windows Server 2008 R2	1163	PS	Healthy	CUG1	Active
10.40.2-lb-01	10.40.3.7	Servers	Microsoft Windows Server 2012 R2	1173	PS	Healthy	CUG1	Active
10.40.2-sq-01	10.40.3.4	Servers	Microsoft Windows Server 2012 R2	1171	PS	Major	CUG1	Active

- The **Component Map** page (Views > Device Maps > Components) allows you to view devices by root node and view the relationships between root nodes, parent components, and child components in a map. This page makes it easy to visualize and manage root nodes and their components. The ScienceLogic platform automatically updates the **Component Map** as new component devices are discovered. The platform also updates each map with the latest status and event information. To view the map for a SQL Server, go to the **Component Map** page and select the map from the list in the left NavBar. To learn more about the **Component Map** page, see the **Views** manual.

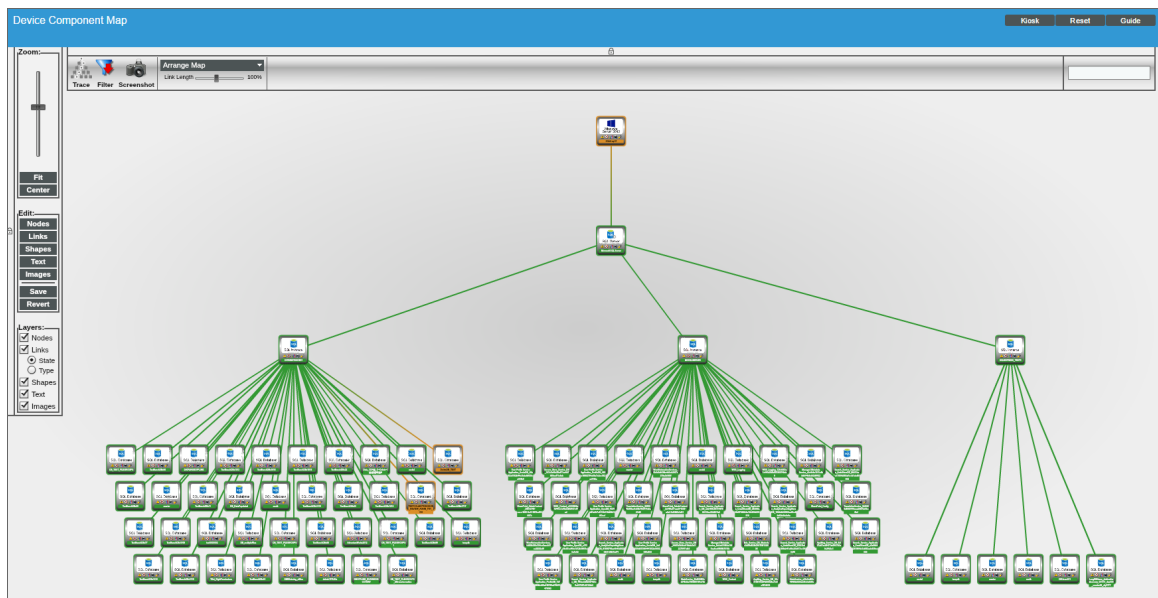

© 2003 - 2018, ScienceLogic, Inc.

All rights reserved.

LIMITATION OF LIABILITY AND GENERAL DISCLAIMER

ALL INFORMATION AVAILABLE IN THIS GUIDE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED. SCIENCELOGIC™ AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.

Although ScienceLogic™ has attempted to provide accurate information on this Site, information on this Site may contain inadvertent technical inaccuracies or typographical errors, and ScienceLogic™ assumes no responsibility for the accuracy of the information. Information may be changed or updated without notice. ScienceLogic™ may also make improvements and / or changes in the products or services described in this Site at any time without notice.

Copyrights and Trademarks

ScienceLogic, the ScienceLogic logo, and EM7 are trademarks of ScienceLogic, Inc. in the United States, other countries, or both.

Below is a list of trademarks and service marks that should be credited to ScienceLogic, Inc. The ® and ™ symbols reflect the trademark registration status in the U.S. Patent and Trademark Office and may not be appropriate for materials to be distributed outside the United States.

- ScienceLogic™
- EM7™ and em7™
- Simplify IT™
- Dynamic Application™
- Relational Infrastructure Management™

The absence of a product or service name, slogan or logo from this list does not constitute a waiver of ScienceLogic's trademark or other intellectual property rights concerning that name, slogan, or logo.

Please note that laws concerning use of trademarks or product names vary by country. Always consult a local attorney for additional guidance.

Other

If any provision of this agreement shall be unlawful, void, or for any reason unenforceable, then that provision shall be deemed severable from this agreement and shall not affect the validity and enforceability of any remaining provisions. This is the entire agreement between the parties relating to the matters contained herein.

In the U.S. and other jurisdictions, trademark owners have a duty to police the use of their marks. Therefore, if you become aware of any improper use of ScienceLogic Trademarks, including infringement or counterfeiting by third parties, report them to Science Logic's legal department immediately. Report as much detail as possible about the misuse, including the name of the party, contact information, and copies or photographs of the potential misuse to: legal@sciencelogic.com



800-SCI-LOGIC (1-800-724-5644)

International: +1-703-354-1010