



WMI and PowerShell Dynamic Application Development

SL1 version 8.14.0

Table of Contents

Introduction	1
Overview	1
Prerequisites	1
What is WMI?	2
What is PowerShell?	2
What is a WMI or PowerShell Dynamic Application?	2
WMI Requests	4
Overview	4
Defining a WMI Request	5
Example WMI Code	6
Defining a WBEM Request	7
Example WBEM Request Code	9
Editing a WMI Request	9
Editing a WBEM Request	10
Deleting a WMI or WBEM Request	10
PowerShell Requests	11
Overview	11
Defining a PowerShell Request	12
Editing a PowerShell Request	13
Deleting a PowerShell Request	14
Converting Legacy PowerShell Requests	14
WMI and PowerShell Collection Objects	16
Overview	16
WMI-Specific Fields for Collection Objects	16
PowerShell-Specific Fields for Collection Objects	17
Configuring Devices for Monitoring via WMI	18
Configuring WMI on Windows 2008 Servers	19
Step 1: Configuring Services	19
Step 2: Configuring the Windows Firewall	21
Step 3: Configuring a User Account and Permissions	21
Configuring Namespace and DCOM Security Permissions	21
Configuring User Account Control to Allow Elevated Permissions	29
Configuring WMI for Windows Desktop Systems	31
Step 1: Configuring Services	31
Step 2: Configuring Windows Firewall	35
Step 3: Setting the Default Namespace Security	35
Step 4: Setting the DCOM Security Level	41
Step 5: Disabling User Account Control	48
Configuring Devices for Monitoring via PowerShell	50
Configuring PowerShell	51
Step 1: Configuring the User Account for the ScienceLogic Platform	51
Option 1: Creating an Active Directory Account	52
Option 2: Creating a Local User Account with Administrator Access	52
Option 3: Creating a Non-Administrator Local User Account	53
Optional: Configuring the User Account for Remote PowerShell Access to Microsoft Exchange Server	55
Optional: Configuring the User Account for Remote PowerShell Access to Hyper-V Servers	55
Creating a User Group and Adding a User in Active Directory	55
Setting the Session Configuration Parameters and Group Permissions	56
Step 2: Configuring a Server Authentication Certificate	57
Option 1: Using the Microsoft Management Console to Create a Self-Signed Authentication Certificate	58

Option 2: Using the MakeCert Tool to Create a Self-Signed Authentication Certificate	60
Option 3: Using PowerShell Commands to Create a Self-Signed Authentication Certificate	60
Step 3: Configuring Windows Remote Management	60
Option 1: Using a Script to Configure Windows Remote Management	61
Option 2: Manually Configuring Windows Remote Management	66
Option 3: Using a Group Policy to Configure Windows Remote Management	69
Step 4: Configuring a Windows Management Proxy	87
Step 5: Increasing the Number of PowerShell Dynamic Applications That Can Run Simultaneously	88
Creating a PowerShell Credential	88
Error Messages for PowerShell Collection	91
Credentials for WMI and PowerShell Devices	93
Overview	93
Configuring a WMI Credential	93
Configuring a PowerShell Credential	95
Creating a WMI Performance Dynamic Application	98
Overview	98
Defining the WMI Request	98
Adding the WMI Request	99
Adding the Collection Objects	100
Creating the Presentation Objects	102
Creating a Credential	107
Manually Aligning the Dynamic Application to a Device	108
Viewing the Performance Reports	109
Creating a PowerShell Performance Dynamic Application	111
Overview	111
Creating the Dynamic Application	111
Adding the PowerShell Command	112
Adding the Collection Object	113
Creating the Presentation Object	114
Creating a Credential	115
Manually Aligning the Dynamic Application to a Device	117
Viewing the Performance Report	118

Introduction

Overview

This manual describes how to use the WMI and PowerShell protocols to define collection objects and create WMI and PowerShell Dynamic Applications.

NOTE: This manual uses the WMI nomenclature with equivalent SQL nomenclature in parentheses. For example, instance (row), property (column), and class (table).

Prerequisites

This manual does not describe how to plan, design, use, or troubleshoot Dynamic Applications for your network. This manual assumes that you are already familiar with the common elements and concepts of Dynamic Applications. For general information on planning, designing, using, and troubleshooting Dynamic Applications, see the manual *Dynamic Application Development*.

WMI Dynamic Applications use the WMI protocol. PowerShell Dynamic Applications use the PowerShell protocol. This manual assumes that you are familiar with either the WMI or PowerShell protocols.

What is WMI?

Windows Management Instrumentation, or WMI, is a Windows Service developed to access management information. WMI is a middle-layer technology that enables standardized management of Windows-based computers. It collects computer management data from a wide variety of sources and makes it accessible by using standard interfaces. WMI's specific query language is similar to SQL. For a comparison of WQL and SQL, see <http://technet.microsoft.com/en-us/library/cc180454.aspx>

What is PowerShell?

Windows PowerShell is a command-line shell and scripting language for administration of Windows systems. SL1 can execute PowerShell requests on target Windows devices via WinRM (Windows Remote Management). For an overview of Windows PowerShell, see <https://docs.microsoft.com/en-us/powershell/scripting/powershell-scripting?view=powershell-6>.

SL1 supports the following PowerShell versions for monitoring Windows devices:

- PowerShell 3.0
- PowerShell 4.0
- PowerShell 5.1

What is a WMI or PowerShell Dynamic Application?

In SL1, a WMI Dynamic Application is a Dynamic Application that uses WMI to retrieve data from devices. WMI Dynamic Applications use WMI or WBEM requests to populate collection objects. WMI requests use WQL (WMI Query Language) to query WMI classes (tables) to retrieve data.

WBEM objects are populated with values returned by the `wbemcli "get instance"` command.

In SL1, a PowerShell Dynamic Application is a Dynamic Application that uses PowerShell to retrieve data from devices. PowerShell Dynamic Applications use PowerShell commands to populate collection objects.

WMI and PowerShell Dynamic Applications have the following elements in common with other Dynamic Applications:

- **Archetypes.** Defines what data is being collected and how it will be displayed in SL1. WMI and PowerShell Dynamic Applications can use either the Performance or Configuration archetypes.
- **Properties.** Allows for version control, release notes, collection, and retention settings.

- **Collection Objects.** Define the individual data-points that will be retrieved by the Dynamic Application. These data points are called collection objects. Defines the type of data that is being collected (gauge, counter, etc) and how it is grouped. Collection objects for WMI and PowerShell Dynamic Applications have settings that are different from collection objects in other types of Dynamic Applications. These settings are described in this manual.
- **Presentations.** For Performance Dynamic Applications, defines how collected values will be displayed by SL1.
- **Thresholds.** Can be used to define a threshold value that can be included in alerts. The threshold appears in the **Device Thresholds** page for each device aligned with the Dynamic Application.
- **Alerts.** Triggers events based on the values retrieved by the Dynamic Application. If the collected data meets the conditions defined in the alert, the alert can insert a message into device logs and trigger events.
- **Credentials.** Define how authentication should occur for each Dynamic Application on each device. WMI Dynamic Applications use Basic/Snippet credentials; PowerShell Dynamic Applications use PowerShell credentials. There are multiple ways to align a credential with a Dynamic Application (during discovery, as secondary credentials for a device, or manually in the Collections page for a device). For details on how SL1 aligns credentials during discovery and how to manually edit and add new credentials to a device, see the manual **Discovery and Credentials**.
- **Relationships.** Dynamic Applications can be configured to automatically create relationships between devices. For example, the Dynamic Applications in the VMware vSphere and NetApp PowerPacks are configured to create relationships between VMware Datastore component devices and their associated NetApp Volume component devices. Relationships created by Dynamic Applications are used and visualized by the platform in the same manner as relationships created by topology collection, Dynamic Component Mapping, and manually in the user interface. The settings for configuring the creation of relationships in configuration WMI and PowerShell Dynamic Applications are the same as the relationship settings for other Dynamic Application protocols.

Chapter

2

WMI Requests

Overview

In SL1, each WMI Dynamic Application must include at least one WMI or WBEM request.

Collection objects in WMI Dynamic Applications objects are populated with the values returned by a WMI request. WMI requests use WQL (WMI Query Language) to query WMI classes (tables) to retrieve data. A single WMI request can populate multiple WMI objects by querying for multiple class properties (table columns). WBEM objects are populated with values returned by the wbemcli "get instance" command.

Collection objects for both WMI and WBEM are aligned with properties (columns). The definition of each object specifies the WMI or WBEM request that will populate the collection object and the property name to align with the object. The retrieved values of the property will populate the object.

To more easily understand WMI, you can compare the terminology to standard SQL terminology:

WMI	SQL
Namespace	Database
Class	Table
Property	Column
Instance	Row

This chapter will discuss:

- [Defining a WMI Request](#)
- [Editing a WMI Request](#)
- [Defining a WBEM Request](#)
- [Editing a WBEM Request](#)
- [Deleting a WMI or WBEM Request](#)


Defining a WMI Request

You can define a WMI request in the **WMI Request Editor & Registry** page. To define a WMI request:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to define a WMI request. Select its wrench icon (🔧).
3. Select the **[WMI Requests]** tab for the Dynamic Application.

NOTE: The **[WMI Requests]** tab will only appear in Dynamic Applications of type *WMI Config* and *WMI Performance*.

4. In the **WMI Request Editor & Registry** page, enter the following:

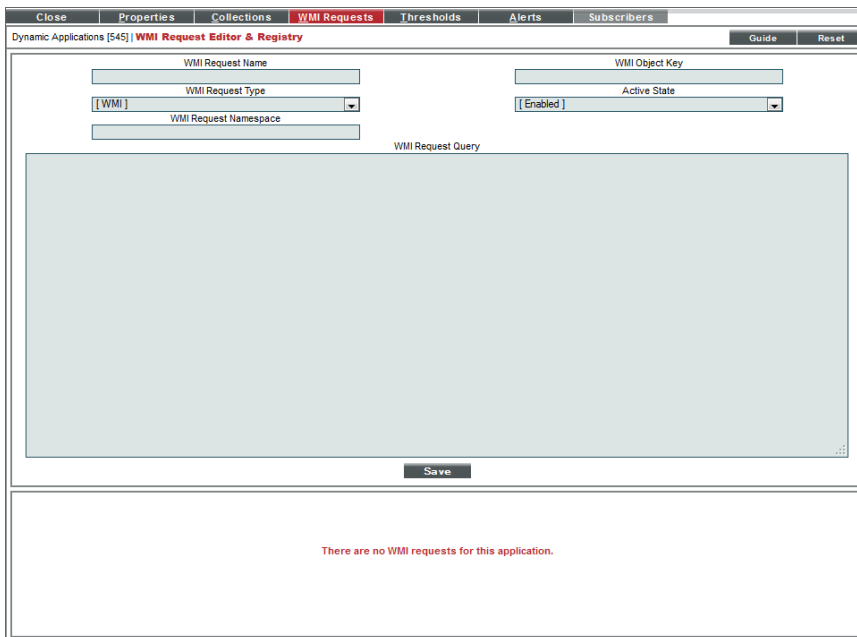

- **WMI Request Name.** Name of the WMI request.
- **WMI Request Type.** Specifies whether to use a WMI request (query) or a WBEM request (a wbemcli "get instance" request sent over HTTP).
- **WMI Request Namespace.** Optional field. In this field, you can specify a WMI namespace. The WMI request will then use this namespace when requesting data. If you do not specify a value in this field, the WMI request will use the default namespace (usually root).
- **WMI Object Key.** The unique key for each instance (row) returned by the request. This unique key must be a property name, and the request must include that property (column) and return values from that property name (column). You must choose a key that remains constant over all polling periods, for example "Name" or "servicename".
- **Active State.** Specifies whether SL1 should use this request when performing collection for the Dynamic Application. Choices are:
 - *Enabled.* SL1 will use the WMI request when performing collection for the Dynamic Application.
 - *Disabled.* SL1 will not use the WMI request when performing collection for the Dynamic Application.
- **WMI Request Query.** Enter the WQL query in this field. In most cases, these queries will be of the format:

SELECT [one or more properties (columns), separated by commas] FROM name of WMI class (table) where data is stored]

For more information on WQL, see <http://msdn.microsoft.com/en-us/library/aa394606%28VS.85%29.aspx>

For more information on WMI classes, see [http://msdn.microsoft.com/en-us/library/aa394554\(v=VS.85\).aspx](http://msdn.microsoft.com/en-us/library/aa394554(v=VS.85).aspx)

For a comparison of WQL and SQL, see <http://technet.microsoft.com/en-us/library/cc180454.aspx>

Example WMI Code

For our example Dynamic Application, we'll use the following WMI request:

```
SELECT TotalVisibleMemorySize,CSName,Caption,SerialNumber FROM Win32_OperatingSystem
```

In this request, we are retrieving the property (column) values from the WMI class (table) **Win32_OperatingSystem**. Win32_OperatingSystem is a class (table) that stores information about an instance of an operating system running on the monitored device. From this class, the WMI request retrieves the values of the following properties:


- **TotalVisibleMemorySize.** Total amount, in kilobytes, of physical memory available to the operating system. This value does not necessarily indicate the true amount of physical memory, but only the amount that is reported to the operating system as available to it. In our example Dynamic Application, we can create an object that maps to this property. To map an object to the retrieved value from this property, we must ensure

that the **WMI Request Arguments** field for the object (in the **Collection Objects** page) contains the value "TotalVisibleMemorySize".

- **CSName**. Name of the computer system (device name as it appears to the operating system). In our example Dynamic Application, we can create an object that maps to this property. To map an object to the retrieved value from this property, we must ensure that the **WMI Request Arguments** field for the object (in the **Collection Objects** page) contains the value "CSName".
- **Caption**. This is a short description of the operating system version. For example, "Microsoft Windows XP Professional Version = 5.1.2500". In our example Dynamic Application, we can create an object that maps to this property. To map an object to the retrieved value from this property, we must ensure that the **WMI Request Arguments** field (in the **Collection Objects** page) contains the value "Caption".
- **SerialNumber**. Operating system product serial identification number. For example: "10497-OEM-0031416-71674". In our example Dynamic Application, we can create an object that maps to this property. To map an object to the retrieved value from this property, we must ensure that the **WMI Request Arguments** field (in the **Collection Objects** page) contains the value "SerialNumber".

Defining a WBEM Request

You can define a WBEM request in the **WMI Request Editor & Registry** page. To define a WBEM request in the **WMI Request Editor & Registry** page:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to define a WBEM request. Select its wrench icon ()
3. Select the **[WMI Requests]** tab for the Dynamic Application.

- In the **WMI Request Editor & Registry** page, enter the following:

- **WMI Request Name.** Name of the WBEM request.
- **WMI Request Type.** Specifies whether to use a *WMI* request (a query) or a *WBEM* request (a `wbemcli "get instance"` request sent over HTTP).
- **WMI Request Namespace.** Optional field. In this field, you can specify a WMI namespace (database). The WBEM request will then use this namespace (database) when requesting data. If you do not specify a value in this field, the WBEM request will use the default namespace (usually `root`).
- **WMI Object Key.** The unique key for each instance (row) returned by the query. This unique key must be a property name, and the query must include that property (column) and return values from that property name (column).
- **Active State.** Specifies whether SL1 should use this request when performing collection for the Dynamic Application. Choices are:
 - *Enabled.* SL1 will use the WBEM request when performing collection for the Dynamic Application.
 - *Disabled.* SL1 will not use the WBEM request when performing collection for the Dynamic Application.
- **WMI Request Query.** Enter the `wbemcli` string in this field. In most cases, this will be of the format:

```
/[name space]:[class name].property=value (this last argument is optional)
```

Usually, `wbemcli` requires that the request begins with the full path to the CIM object, including:

```
http://username:password@hostname or IP:port,
```

SL1 uses the credentials for the Dynamic Application to automatically append this string to the front of each wbemcli request.

For more information on wbemcli, see <http://linux.die.net/man/1/wbemcli>

5. Select the **[Save]** button to save the new WBEM request.

Example WBEM Request Code

For our example Dynamic Application, we'll use the following WMI request:

```
/root/cimv2:CIM_OperatingSystem
```

- In this request, we are retrieving value from the namespace (database) called **/root/cimv2**.
- We are requesting all values from the class (table) called **CIM_OperatingSystem**.
- This request will return all values from the class CIM_OperatingSystem. The values will be returned in the format



```
property_name="value"
```

- Each WBEM object (defined in the **Collection Objects** page) must map to a property name returned by a WBEM request. To map each object, you must have specified a value in the **WMI Request Arguments** field that matches the name of a property returned by this request.

NOTE: Before defining objects for a WBEM request, you must know which property names will be returned.

Editing a WMI Request

To edit a WMI request in the **WMI Request Editor & Registry** page:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to edit a WMI request. Select its wrench icon (.
3. Select the **[WMI Requests]** tab for the Dynamic Application.
4. In the **WMI Request Editor & Registry** page, find the WMI request in the **WMI Request Registry** pane. Select its wrench icon (.
5. The fields in the top pane are populated with values from the selected WMI request. You can edit the value of one or more fields. For a description of each field, see the section [Defining a WMI Request](#) in this manual.
6. Select the **[Save]** button to save your changes to the WMI request.

Editing a WBEM Request

You can edit a WBEM Request the same way you edit a WMI request. To view these steps, see the section [Editing a WMI Request](#) in this manual.

Deleting a WMI or WBEM Request

To delete a WMI or WBEM request in the **WMI Request Editor & Registry** page:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to delete a WMI request or WBEM request. Select its wrench icon (🔧).
3. Select the **[WMI Requests]** tab for the Dynamic Application.
4. In the **WMI Request Editor & Registry** page, find the request you want to delete in the **WMI Request Registry** pane. Select its bomb icon (💣).

Close Properties Collections **WMI Requests** Thresholds Alerts Subscribers

Dynamic Applications [545] | **WMI Request Editor & Registry** | WMI Request Added Successfully | Editing Snippet [447] Guide Reset

WMI Request Name: Example Request

WMI Request Type: [WMI]

WMI Request Namespace: []

WMI Object Key: servicename

Active State: [Enabled]

WMI Request Query

```
SELECT TotalVisibleMemorySize,CSName,Caption,SerialNumber FROM Win32_OperatingSystem
```

Save Save As

WMI Request Registry

	WMI Request Name	Type	State	ID	Date Edit	
1.	Example Request	WMI	Enabled	wmi_447	2012-06-20 18:09:30	💣

Chapter

3

PowerShell Requests

3

Overview

PowerShell Dynamic Applications must include one or more requests that define how SL1 should request data from a device. Each request specifies a PowerShell command that will gather a response from the device.


Each collection object in a PowerShell Dynamic Application is associated with a request. The collection object definition specifies which property in the response should be used to populate the values for that collection object. A single request can be used to populate multiple collection objects.


This chapter will discuss:

- [*Defining a PowerShell Request*](#)
- [*Editing a PowerShell Request*](#)
- [*Deleting a PowerShell Request*](#)
- [*Converting Legacy PowerShell Requests*](#)

Defining a PowerShell Request

To define a request for a PowerShell Dynamic Application:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Locate the Dynamic Application for which you want to define a request. Click its wrench icon (). The **Dynamic Applications Properties Editor** page appears.
3. Click the **[PowerShell]** tab. The **Dynamic Applications PowerShell Command Editor & Registry** page appears.
4. Supply values in the following fields:
 - **PowerShell Command Name**. Enter a name for the command.
 - **Active State**. Specifies whether SL1 should perform this request during collection for this Dynamic Application. Choices are *Enabled* or *Disabled*.
 - **Response Object Key**. This field is not currently used.
 - **PowerShell Implicit Remoting**. The mechanism by which a user or application accesses PowerShell cmdlets delivered via the Exchange Management Shell. This mechanism allows Dynamic Applications of type PowerShell to connect to the remote management shell for a Microsoft application and import the cmdlets published by that Microsoft application. Choices are *Enabled* or *Disabled*. If this field is set to *Enabled*, you can reference the imported cmdlets in the **PowerShell Command Query** field.
 - **Configuration Name**. Grayed out unless **PowerShell Implicit Remoting** is set to *Enabled*. Select from a list of configuration names for PowerShell. By default, this field includes:
 - Microsoft.PowerShell
 - Microsoft.Exchange

To enter a custom configuration name, click the plus sign icon () and enter the custom value.

- **Connection URI**. Grayed out unless **PowerShell Implicit Remoting** is set to *Enabled*. Specifies a Uniform Resource Identifier (URI) that defines the connection endpoint for the session. The URI must be fully qualified. By default, this field includes:
 - http://%D/PowerShell
 - http://%D:%P/WSMAN

NOTE: SL1 will replace %D with the hostname or FQDN of the Microsoft server specified in the PowerShell credential.

To enter a custom URI, click the plus sign icon () and enter the custom value.

- **Cmdlets to Import.** Grayed out unless **PowerShell Implicit Remoting** is set to *Enabled*. Enter a comma-separated list of one or more PowerShell cmdlet names that you want to use in this PowerShell session. If you leave this field blank, SL1 will import all cmdlets from the remote management shell for use in this PowerShell session.
- **PowerShell Command Query.** Enter the PowerShell command to execute. The PowerShell command must meet the following requirements:
 - The command must not end with any of the Format-* cmdlets. This includes the use of their aliases (IE. "fl" for Format-list).
 - The command must return output that can be piped to the Format-list cmdlet.
 - The command must not return whitespace over multiple lines.
 - The PowerShell cmdlets you invoke must exist on the target Windows server with the required version of PowerShell.
 - The PowerShell cmdlets you invoke must not write to the standard out pipe unless the output needs to be processed and put into a collection object.
 - The PowerShell cmdlets you invoke must be synchronous. Do not use asynchronous cmdlets, for example, Invoke-Async or Wait-Job.
 - The PowerShell cmdlets you invoke must not be an interactive cmdlet, for example, Enter-PSSession.
 - The PowerShell cmdlets you invoke must not query the same property twice.
 - If an invoked PowerShell cmdlet creates a new PSSession object, you must invoke the Remove-PSSession cmdlet before the original command ends.


In addition to the requirements listed above, the following best practices are recommended when developing PowerShell commands:


- Perform as much computational work in the PowerShell command as possible to reduce the workload of SL1.
- Query only the pieces of information required to populate the collection objects in the Dynamic Application.
- Per Microsoft guidelines, do not query the Win32_Product WMI class. For more information, see <http://support.microsoft.com/kb/974524>.

5. Click the **[Save]** button.

Editing a PowerShell Request



To edit a PowerShell request:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to edit a PowerShell request. Select its wrench icon (.
3. Select the **[PowerShell]** tab for the Dynamic Application.

4. In the **Dynamic Applications PowerShell Command Editor & Registry** page, find the PowerShell request and select its wrench icon (.
5. The fields in the top pane are populated with values from the selected PowerShell request. You can edit the value of one or more fields. For a description of each field, see the section [Defining a PowerShell Request](#) in this manual.
6. Select the **[Save]** button to save your changes to the PowerShell request.

Deleting a PowerShell Request

To delete a PowerShell request in the **Dynamic Applications PowerShell Command Editor & Registry** page:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. In the **Dynamic Applications Manager** page, find the Dynamic Application for which you want to delete a PowerShell request. Select its wrench icon (.
3. Select the **[PowerShell]** tab for the Dynamic Application.
4. In the **Dynamic Applications PowerShell Command Editor & Registry** page, find the request you want to delete. Select its bomb icon (.

Converting Legacy PowerShell Requests

The 7.3 version of SL1 supported the use of PowerShell Dynamic Applications with an SSH-based proxy. Dynamic Applications developed for the SSH-based proxy are not compatible with the "agentless" PowerShell collection introduced in the 7.5 release.

To update a Dynamic Application developed for the SSH-based proxy for use with "agentless" PowerShell collection, edit each PowerShell request in the Dynamic Application and make the following changes to the **PowerShell Command Query**:

- Remove "-Computer %s".
- Remove the "Format-List" cmdlet from the end of the command. If you are using a cmdlet that returns properties that you do not want to collect and you want to continue returning a sub-set of properties, use the "Select" cmdlet instead of "Format-List".

For example, suppose you need to update the following legacy PowerShell command:

```
Get-WmiObject -Computer %s Win32_DiskDrive | Format-List Partitions, DeviceID, Model, Size, Caption
```

The new command would be:

```
Get-WmiObject Win32_DiskDrive | Select Partitions, DeviceID, Model, Size, Caption
```

NOTE: In addition to updating the PowerShell requests in the Dynamic Application, you must also use a PowerShell credential with the Dynamic Application instead of a Basic/Snippet credential.

WMI and PowerShell Collection Objects

Overview

This chapter describes how to define collection objects for WMI and PowerShell Dynamic Applications.

This chapter describes only the fields specific to Defining a Collection Object for a WMI or PowerShell Dynamic Application. All the remaining fields, for both performance and configuration archetypes, are described in detail in the manual *Dynamic Application Development*. All other elements of WMI and PowerShell Collection Objects, such as presentation objects and alerts, behave in the same manner as other Dynamic Application types. For details on other parts of WMI or PowerShell Dynamic Applications, see the manual *Dynamic Application Development*.

WMI-Specific Fields for Collection Objects

Unlike collection objects for other Dynamic Application types, collection objects for WMI Dynamic Applications are based on WMI Requests. Because of this, collection objects for WMI Dynamic Applications have the following unique fields:

- **WMI Request Arguments.** When you request data from WMI or WBEM, you are requesting data from a class (table), which returns data in tabular form. In this field, you must specify the name of the property (table column) to associate with this object. This property name must be included in the WMI request, specified in the *WMI Request* field.

- **WMI Request.** Name of the WMI request associated with this object. The WMI requests in this drop-down list are defined in one of two places:
 - If *No Caching* or *Cache Results* is selected in the **Caching** field in the **Dynamic Applications Properties Editor** page for this Dynamic Application, this list contains all WMI Requests defined in the **[WMI Requests]** tab for this Dynamic Application. Select from the list of WMI requests defined for this Dynamic Application.
 - If *Consume cached results* is selected in the **Caching** drop-down list in the **Dynamic Applications Properties Editor** page, this list contains all WMI Requests defined in WMI Dynamic Applications that have *Cache results* selected in the **Caching** field in the **Dynamic Applications Properties Editor** page. Select from the list of cached WMI requests.

NOTE: If *Consume cached results* is selected in the **Caching** field in the **Dynamic Applications Properties Editor** page for a Dynamic Application, the **[WMI Requests]** tab is hidden and you cannot define WMI Requests for this Dynamic Application. You can only reference WMI Requests that reside in Dynamic Applications that cache results.

PowerShell-Specific Fields for Collection Objects

Unlike collection objects for other Dynamic Application types, collection objects for PowerShell Dynamic Applications are based on PowerShell Requests. Because of this, collection objects for PowerShell Dynamic Applications have the following unique fields:

- **PowerShell Arguments.** Enter the property that is associated with this collection object. This property must be included in the PowerShell command you select in the **PowerShell Request** field.
- **PowerShell Request.** Select the PowerShell request associated with this collection object, i.e. the PowerShell command that collects values for this collection object.

For example, suppose you have defined the following PowerShell request:

```
Get-WmiObject Win32_DiskDrive | Select Partitions, DeviceID, Model, Size, Caption
```

This request returns the properties Partitions, DeviceID, Model, Size, and Caption. To store the values returned for each of the five properties, you would create five collection objects. For each of the five collection objects, supply the property name in the **PowerShell Arguments** field, e.g. "Partitions".

Configuring Devices for Monitoring via WMI

Overview

The following sections describe how to configure Windows Server 2008 and later and Windows desktop systems for monitoring by SL1 using SNMP:

Configuring WMI on Windows 2008 Servers	19
Step 1: Configuring Services	19
Step 2: Configuring the Windows Firewall	21
Step 3: Configuring a User Account and Permissions	21
Configuring Namespace and DCOM Security Permissions	21
Configuring User Account Control to Allow Elevated Permissions	29
Configuring WMI for Windows Desktop Systems	31
Step 1: Configuring Services	31
Step 2: Configuring Windows Firewall	35
Step 3: Setting the Default Namespace Security	35
Step 4: Setting the DCOM Security Level	41
Step 5: Disabling User Account Control	48

Configuring WMI on Windows 2008 Servers

Windows Management Instrumentation, or WMI, is the infrastructure that provides information about operations and management on Windows-based operating systems. WMI can be configured to respond to remote requests from SL1.

To configure a Windows device to respond to remote requests, you must perform the following steps:

1. [Configure Services](#)
2. [Configure the Windows Firewall](#)
3. [Configure a user account and permissions](#)

Most remote requests can be performed by a standard (non-administrator) user account that has been granted specific privileges. However, some requests can be performed only by a user with elevated permissions. For requests performed by SL1 to a Windows server, the following users have elevated permissions:

- The default "Administrator" user account.
- A user account in the **Administrators** group on a Windows server that has User Account Control disabled.
- A user account in the **Administrators** group on a Windows server where a registry entry has been added to disable remote User Account Control filtering.

For a list of WMI classes that require elevated permissions, see <http://msdn.microsoft.com/en-us/library/windows/desktop/aa826699%28v=vs.85%29.aspx>

Step 1: Configuring Services


The following services must be running for a Windows device to respond to remote WMI requests:

NOTE: ScienceLogic recommends you set all these services to automatically start.


- COM+ Event System
- DCOM Server Process Launcher
- Remote Procedure Call (RPC)
- Remote Registry
- Server
- Windows Management Instrumentation

To ensure a service is running, perform the following steps:

1. In the left pane of the **Server Manager** window, expand the *Configuration* section, and then select *Services*.

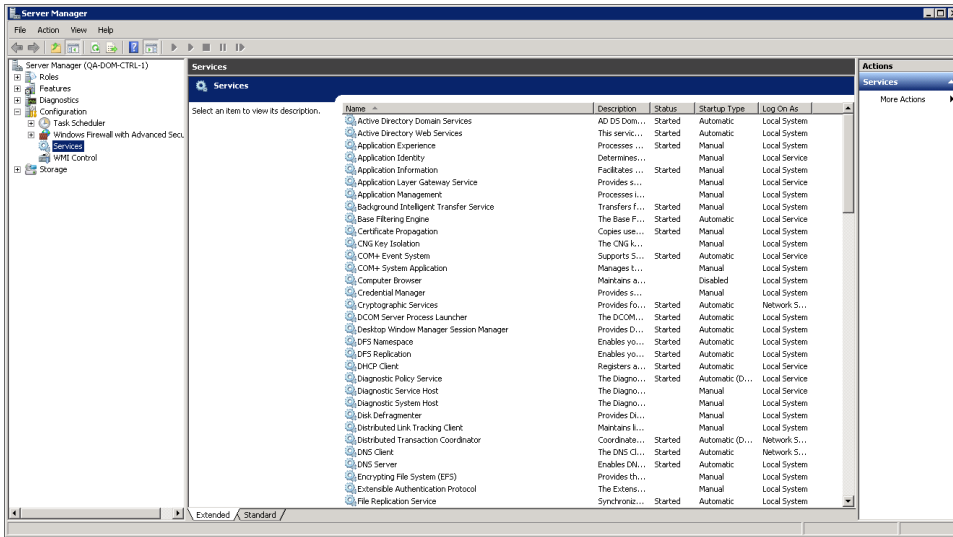

2. For each required service, the **Startup Type** column should display *Automatic*. If a service does not have a **Startup Type** of *Automatic*, double-click on that service. The Properties window for that service is displayed:

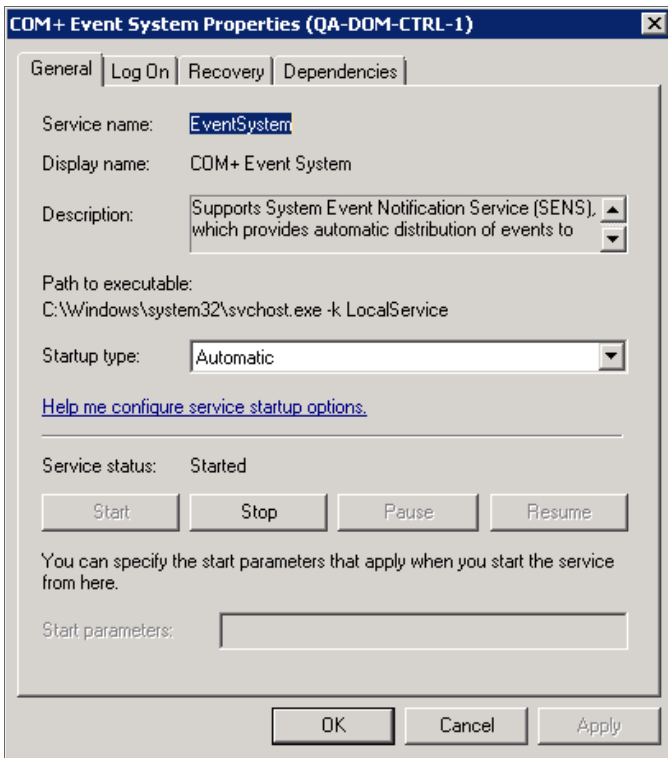

3. In the **Startup Type** field, select *Automatic*.
4. Click the **[Apply]** button.
5. If the service has not already started, click the **[Start]** button.

Step 2: Configuring the Windows Firewall

To configure Windows Firewall to accept remote WMI requests, execute the following two commands at the console:

```
netsh advfirewall firewall set rule group="windows management instrumentation (wmi)"
new enable=yes
netsh advfirewall firewall set rule group="remote administration" new enable=yes
```

Step 3: Configuring a User Account and Permissions

There are three ways to configure the user account that SL1 will use to perform WMI requests:

1. To monitor the Windows server using WMI Dynamic Applications that require **standard permissions**, you can configure a standard user account for use by SL1. The user account for use by SL1 must be included in the **Distributed COM Users** and **Performance Monitor Users** groups. (For more information, consult Microsoft's documentation.)
2. To monitor the Windows server using WMI Dynamic Applications that require **elevated permissions**, you can use the default "Administrator" user account. If you use the "Administrator" user account, you do not need to make changes to the User Account Control settings.
3. To monitor the Windows server using WMI Dynamic Applications that require **elevated permissions**, you can also use a user account that is included in the **Administrators** group. However, you must perform **one** of the following additional steps to use this type of user account:
 - **Option 1:** Make the user a member of the **Distributed COM Users** and **Performance Monitor Users** groups, in addition to the **Administrator** group. (For more information, consult Microsoft's documentation.)
 - **Option 2:** [Configure User Access Control to allow elevated permissions.](#)


Configuring Namespace and DCOM Security Permissions

For each of these methods, you must ensure that the configured Namespace and DCOM security permissions allow that user to perform remote requests.

To configure the Namespace and DCOM security permissions:


1. In the left pane of the **Server Manager** window, expand the *Configuration* section.
2. Right-click on the *WMI Control* entry and then select *Properties*.

3. In the **WMI Control Properties** window, click the **[Security]** tab:

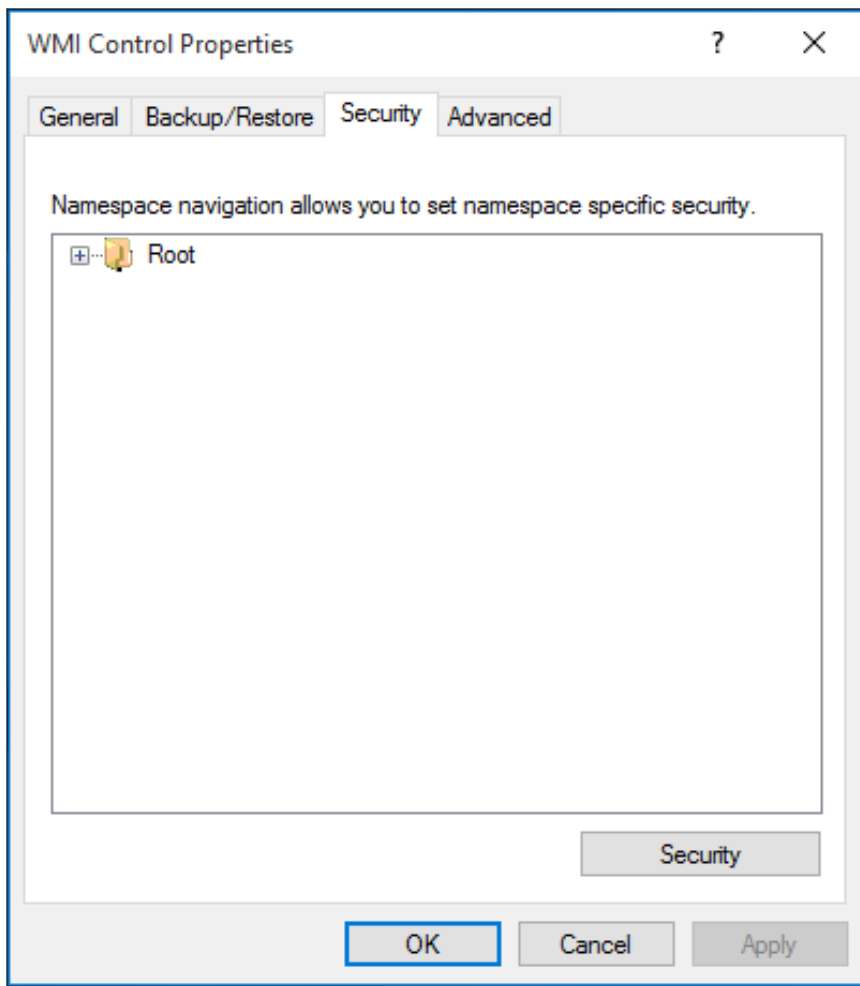


4. In the Security tab, select the *Root* entry from the navigation pane and then select the **[Security]** button. The **Security for Root** window appears.


5. In the **Security for Root** window, select the **[Advanced]** button. The **Advanced Security Settings for Root** window is displayed:

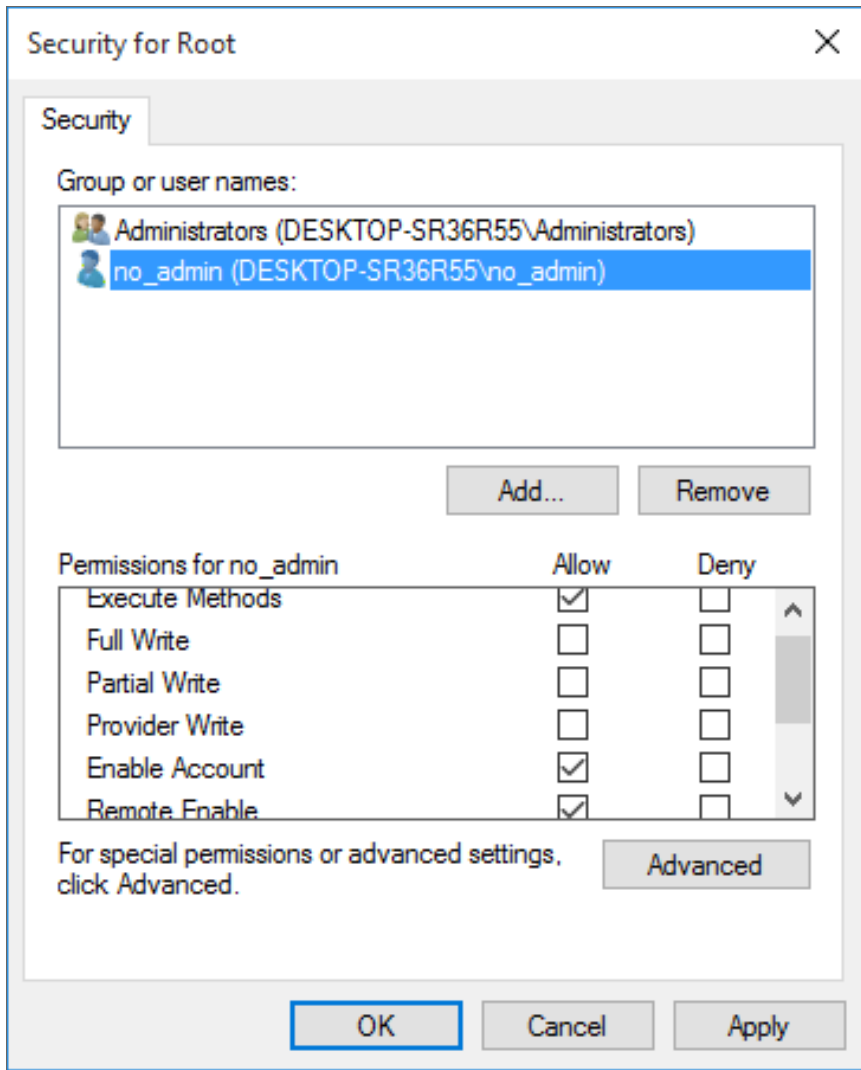

- In the **Advanced Security Settings for Root** window, click the **[Add]** button. The **Select User, Computer, Service Account, or Group** window appears.

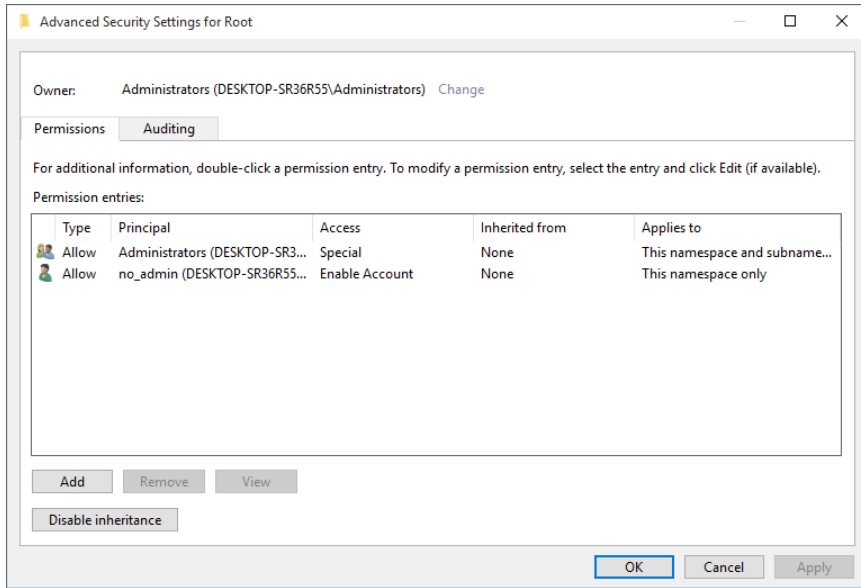


- In the **Select User, Computer, Service Account, or Group** window :

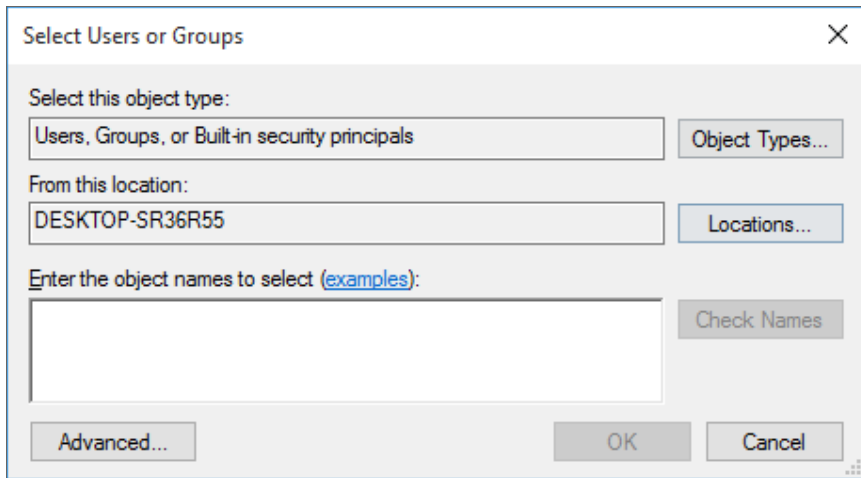


- In the **Enter the object name to select** field, enter the name of the user account that SL1 will use to perform WMI requests or the name of a group that includes that user account.
- Click the **[Check Names]** button to verify the name and then click the **[OK]** button.

8. The **Permission Entry for Root** window is displayed:

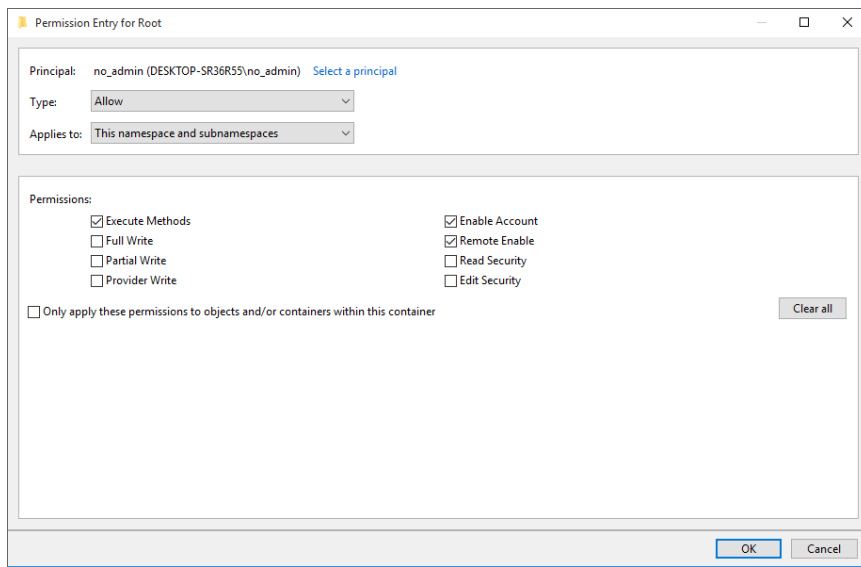


- Select *This namespace and subnamespaces* in the **Apply to** field and select the **Allow** checkbox for all permissions.
 - Click the **[OK]** button.
9. In the **Advanced Security Settings for Root** window, click the **[Apply]** button.
10. Click the **[OK]** button in each open window to exit.
11. Go to the Start menu and select **[Run]**.

12. In the **Run** window, enter "dcomcnfg" and click **[OK]**. The **Component Services** window is displayed:

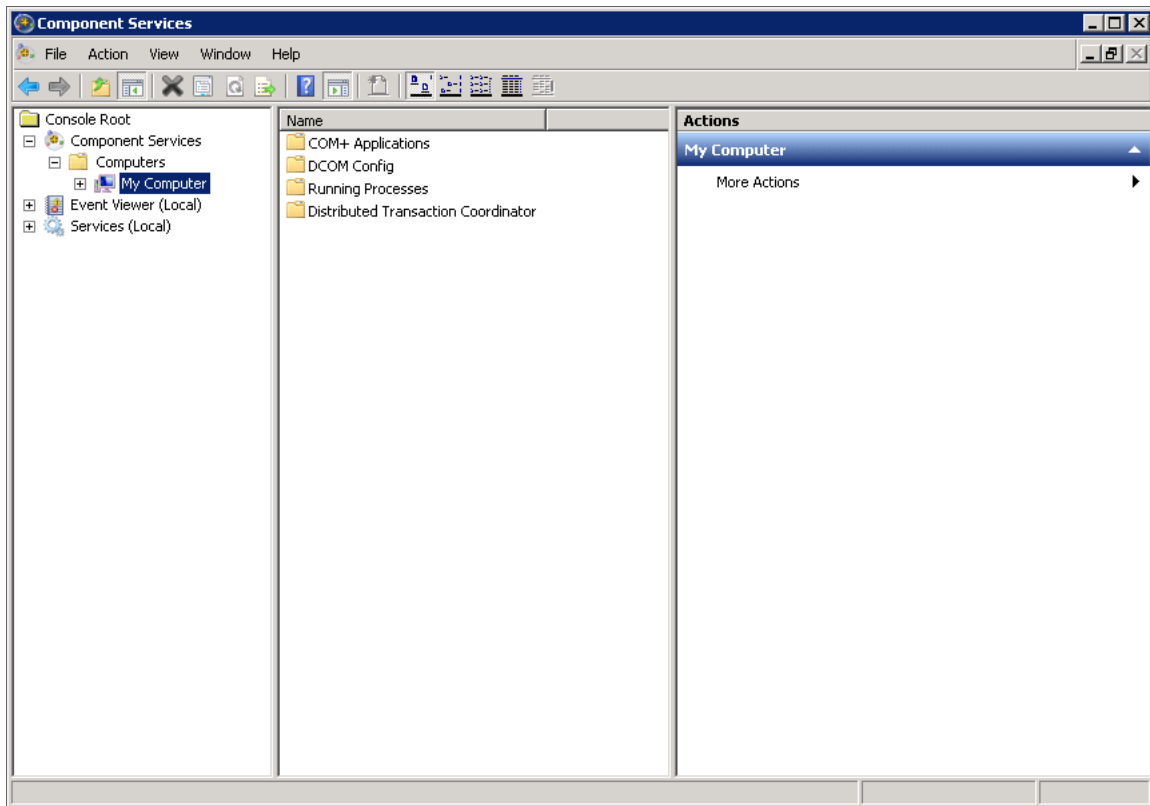


13. In the left pane, expand **Component Services > Computers**. Right-click on **My Computer** and select **Properties**. The **My Computer Properties** window is displayed.

14. In the **My Computer Properties** window, select the **[Default Properties]** tab:

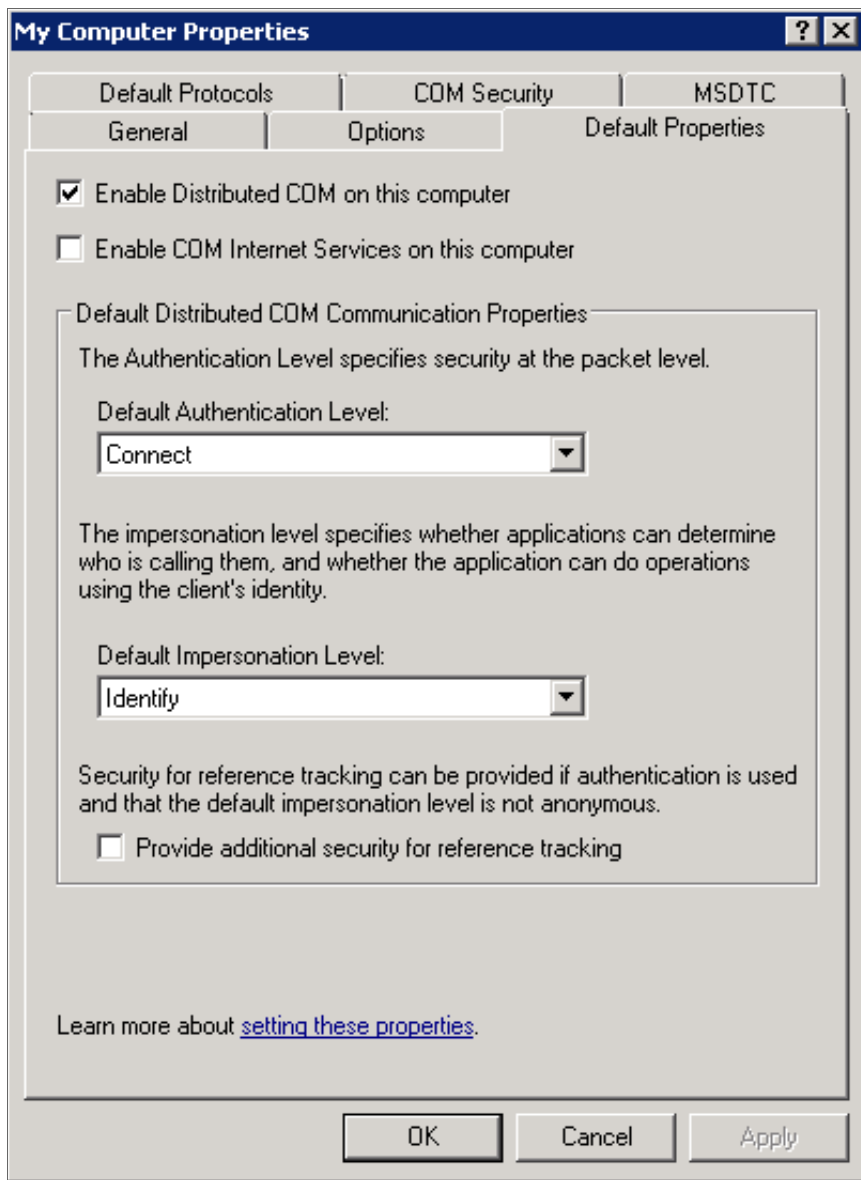

- Ensure that the **Enable Distributed COM on this computer** checkbox is selected.
- Select **Connect** in the **Default Authentication Level** drop-down list.
- Select **Identify** in the **Default Impersonation Level** drop-down list.
- If you made changes in the **[Default Properties]** tab, click the **[Apply]** button.

15. Select the [COM Security] tab:

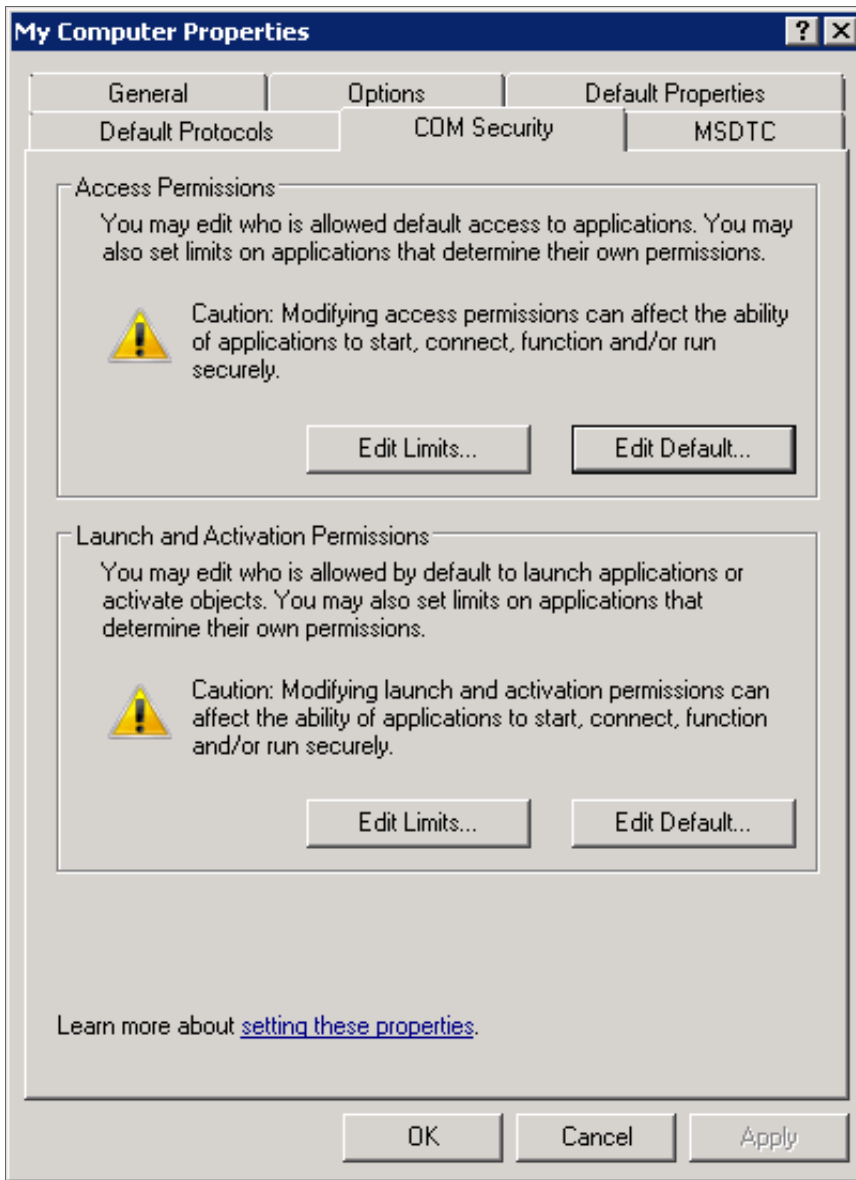

16. Select the [Edit Limits...] button in the **Access Permissions** pane.
17. In the window that appears, click the [Add...] button. The **Select Users, Computers, Service Accounts, or Groups** window is displayed.
- Enter the name of the user account that SL 1 will use to perform WMI requests or the name of a group that includes that user account.
 - Click the **Check Names** button to verify the name and then click the [OK] button.

18. Select the group or user you added in the **Group or user names** pane and then select the **Allow** checkbox for all permissions.
19. Click the **[OK]** button.
20. Click the **[Edit Default...]** button in the **Access Permissions** pane, then repeat steps 16 - 19.
21. Click the **[Edit Limits...]** button in the **Launch and Activation Permissions** pane, then repeat steps 16 - 19.
22. Click the **[Edit Default...]** button in the **Launch and Activation Permissions** pane, then repeat steps 16 - 19.
23. Click the **[Apply]** button.
24. Click **[Yes]** in the confirmation window.

Configuring User Account Control to Allow Elevated Permissions

If you want to use WMI Dynamic Applications that require elevated permissions to monitor a Windows server and you are using a user account other than the default "Administrator" user account, you must perform **one** of the following two tasks:


- **Option 1:** [Disable User Account Control](#).
- **Option 2:** [Add a registry entry that disables remote User Account Control filtering](#).

Option 1: Disabling User Account Control

To disable User Account Control:

1. Open the **Control Panel** in Large Icon or Small Icon view.
2. Select **User Accounts**.

3. Select **Change User Account Control Settings**. The **User Account Control Settings** window is displayed:

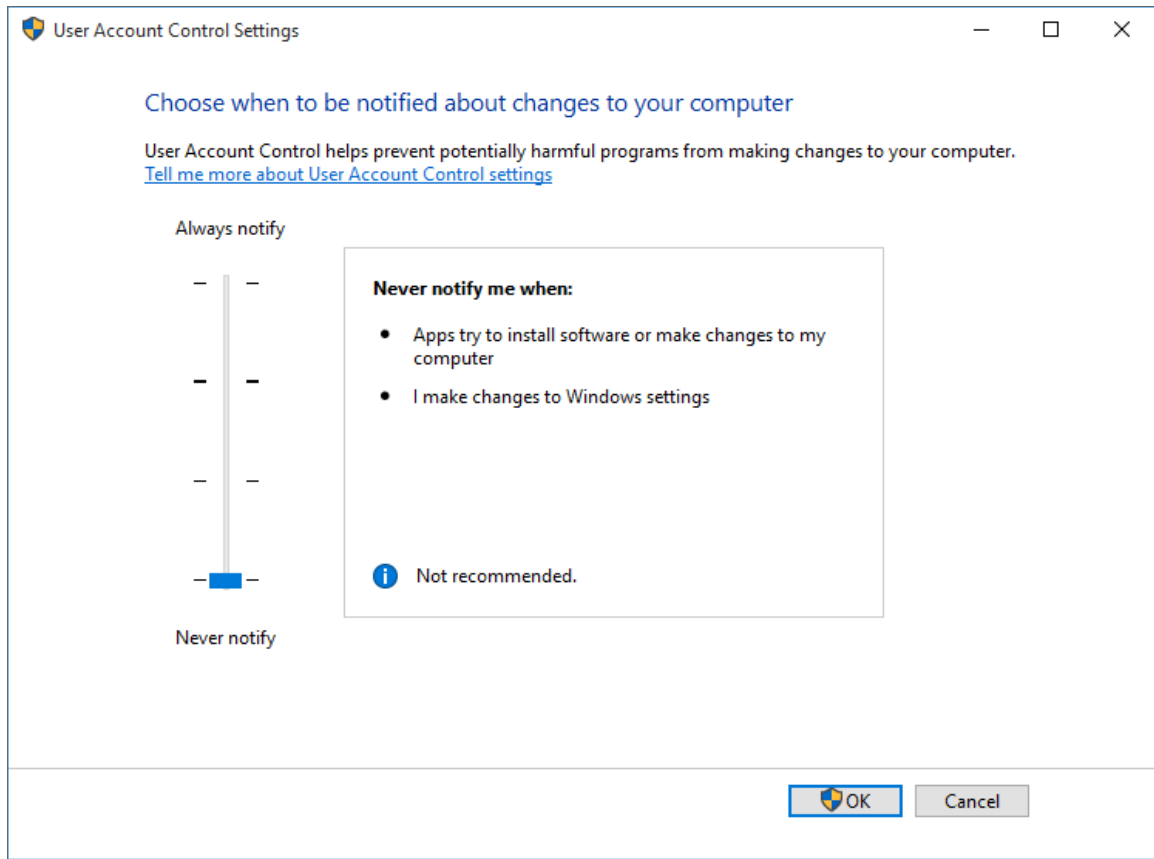

4. Move the slider to **Never Notify**.
5. Click the [OK] button.
6. Restart the Windows server.

Option 2: Adding a Registry Entry that Disables Remote User Account Control Filtering

To add a registry entry that disables remote User Account Control filtering:

1. To disable the filter, open a text editor and add the following lines to a new file:

```
Windows Registry Editor Version 5.00
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System]
"LocalAccountTokenFilterPolicy"=dword:00000001
```

2. Save the file with a ".reg" extension.
3. In Windows Explorer, double click on the .reg file.
4. Select [Yes] in the pop-up window.

Configuring WMI for Windows Desktop Systems

This section describes how to configure devices that are running a desktop version of the Windows operating system for monitoring by SL1 using WMI.

Before performing the tasks described in this section, you must know the IP address of each SL1 appliance in your network. If you have not installed a SL1 appliance, you must know the future IP address that will be used by each SL1 appliance.

NOTE: To be monitored by SL1, a Windows device must be running the Windows 7 operating system or later.

NOTE: TCP/IP must be installed and configured before you can install SNMP on a Windows device.

Windows Management Instrumentation (WMI) is the infrastructure that provides information about operations and management on Windows-based operating systems. WMI can be configured to respond to remote requests from SL1. To configure a device running a desktop version of the Windows operating system to respond to remote requests, you must perform the following steps:

1. [Configure Services](#)
2. [Configure the Windows Firewall](#)
3. [Set Default Namespace Security](#)
4. [Set the DCOM Security Level](#)
5. [Disable User Account Control](#)

NOTE: The following instructions describe how to configure WMI on devices running a desktop version of the Windows 10 operating system. For instructions on how to configure WMI on earlier Windows versions, consult Microsoft's documentation.

Step 1: Configuring Services

The following services must be running for a Windows device to respond to remote WMI requests:


NOTE: ScienceLogic recommends you set all these services to start automatically.

- COM+ Event System


- Remote Access Auto Connection Manager
- Remote Access Connection Manager
- Remote Procedure Call (RPC)
- Remote Procedure Call (RPC) Locator
- Remote Registry
- Server
- Windows Management Instrumentation
- WMI Performance Adapter
- Workstation

To ensure a service is running, perform the following steps:

1. Click the magnifying glass icon in the bottom-left corner and type "Services" in the **Search Windows** field.
2. Click the **Services** Desktop app.

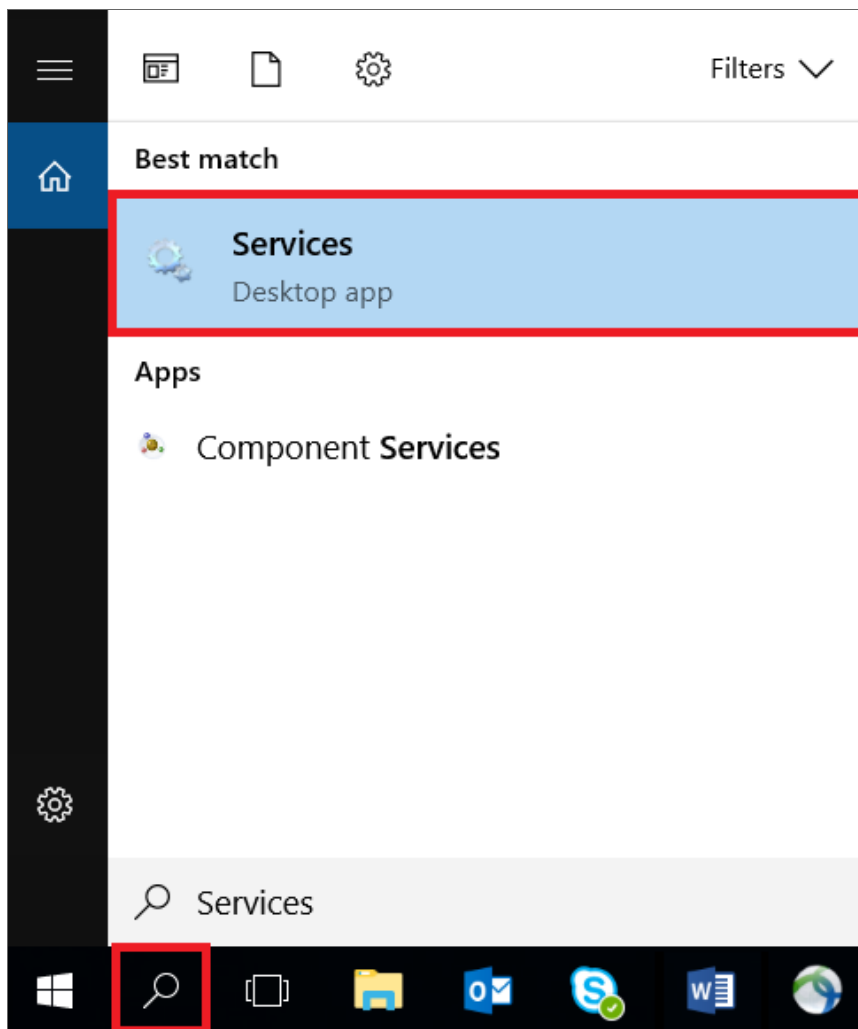


- From the list of services in the right pane, perform the remaining steps for **each** of the services you want to check. This example uses **Workstation**. However, you should check each of the following services:

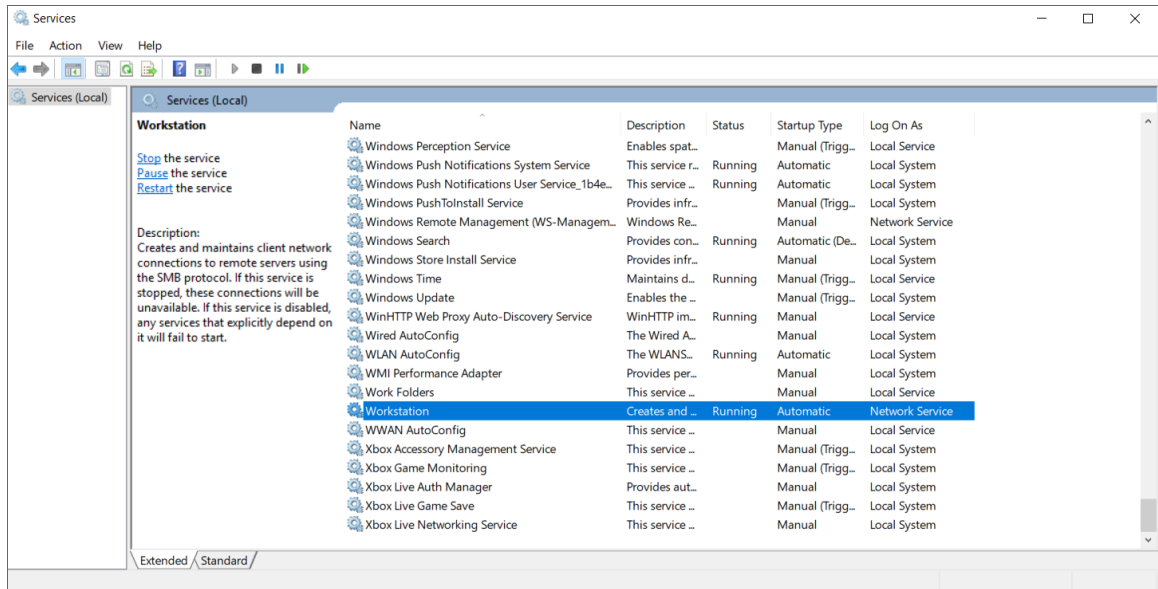

- COM+ Event System
- Remote Access Auto Connection Manager
- Remote Access Connection Manager
- Remote Procedure Call (RPC)
- Remote Procedure Call (RPC) Locator
- Remote Registry
- Server
- Windows Management Instrumentation
- WMI Performance Adapter
- Workstation

4. Double-click the name of the service. In this example, we double-clicked **Workstation**.
5. In the **Workstation Properties** dialog box, click the **[General]** tab and complete the following field:

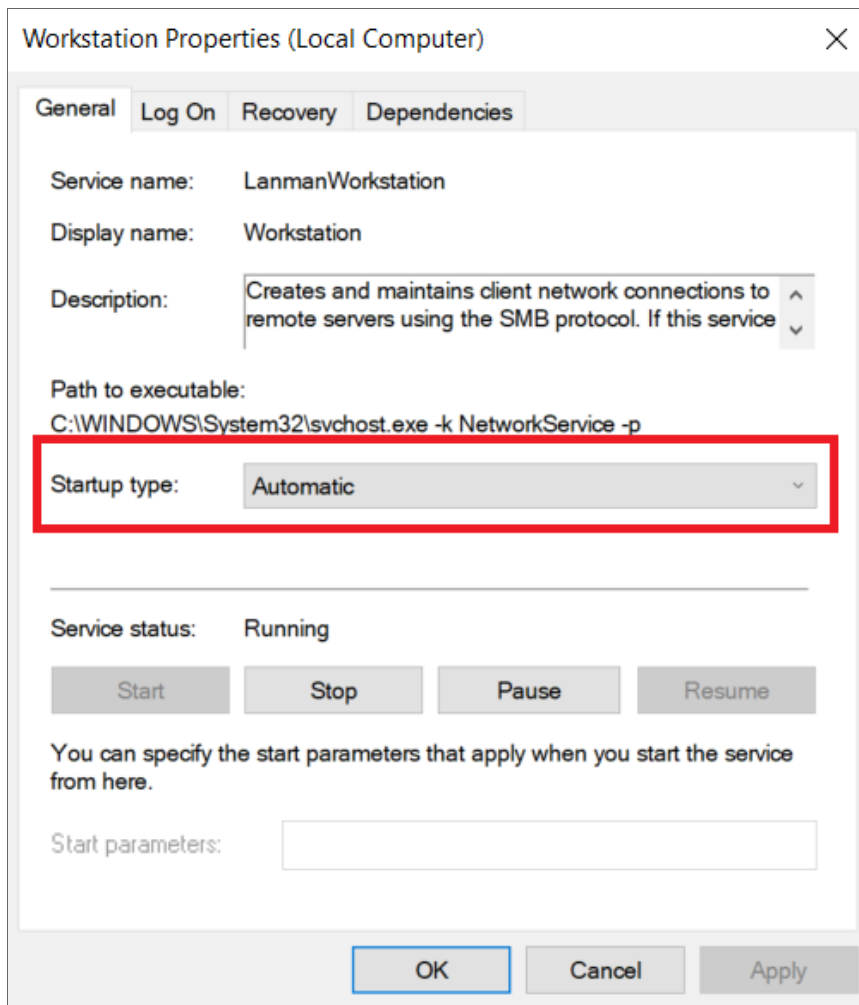

- **Startup Type.** Select **Automatic**.

6. Click the **[Apply]** button.
7. If the service has not already started, click the **[Start]** button.
8. Repeat steps 4-7 for each service.

Step 2: Configuring Windows Firewall

To configure Windows Firewall to accept remote WMI requests:

1. Click the magnifying glass icon in the bottom-left corner and type "Command Prompt" in the **Search Windows** field.
2. Execute the following two commands in the Command Prompt window:

```
netsh advfirewall firewall set rule group="windows management instrumentation (wmi)"  
new enable=yes  
netsh advfirewall firewall set rule group="remote administration" new enable=yes
```

3. If the result of the second command is "No rules match the specified criteria", run the following two commands:


```
netsh firewall set service remoteadmin enable  
netsh advfirewall firewall set rule group="remote administration" new enable=yes
```

Step 3: Setting the Default Namespace Security


To set the default namespace security, perform the following steps:

1. Click the magnifying glass icon in the bottom-left corner and type "Services" in the **Search Windows** field.


2. Click the **wmimgmt.msc** Microsoft Common Console Document.

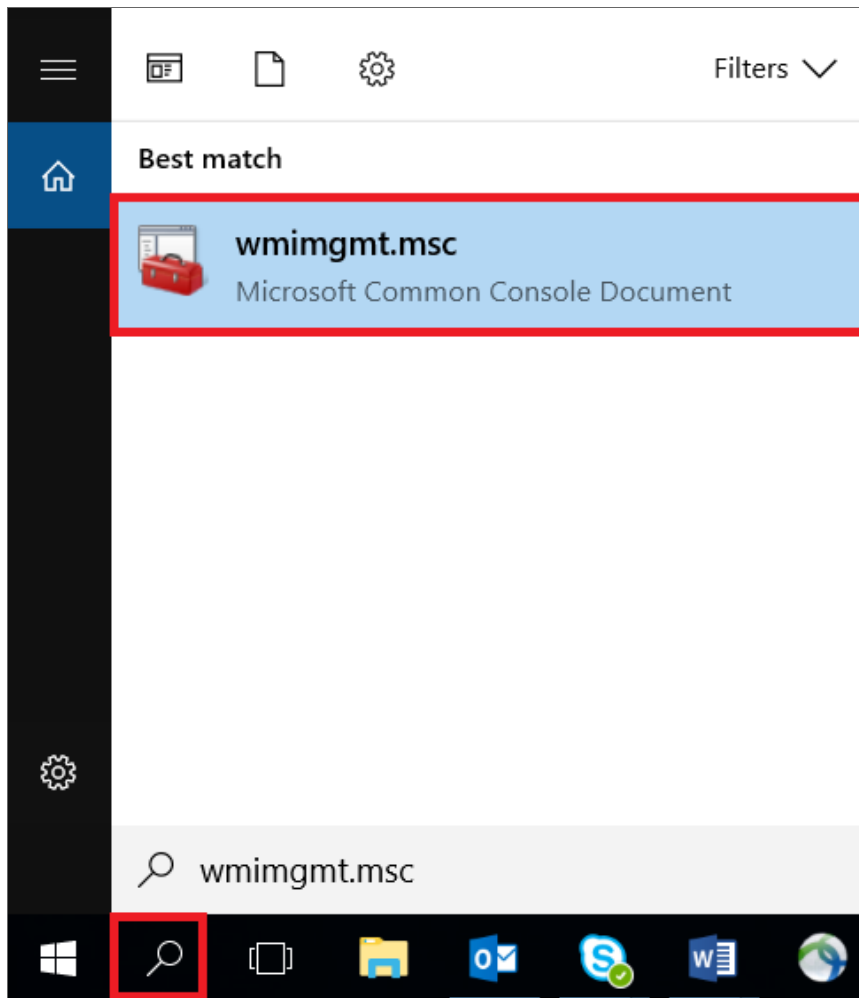


3. In the **WmiMgmt** window, right click **WMI Control (Local)** and select *Properties*.

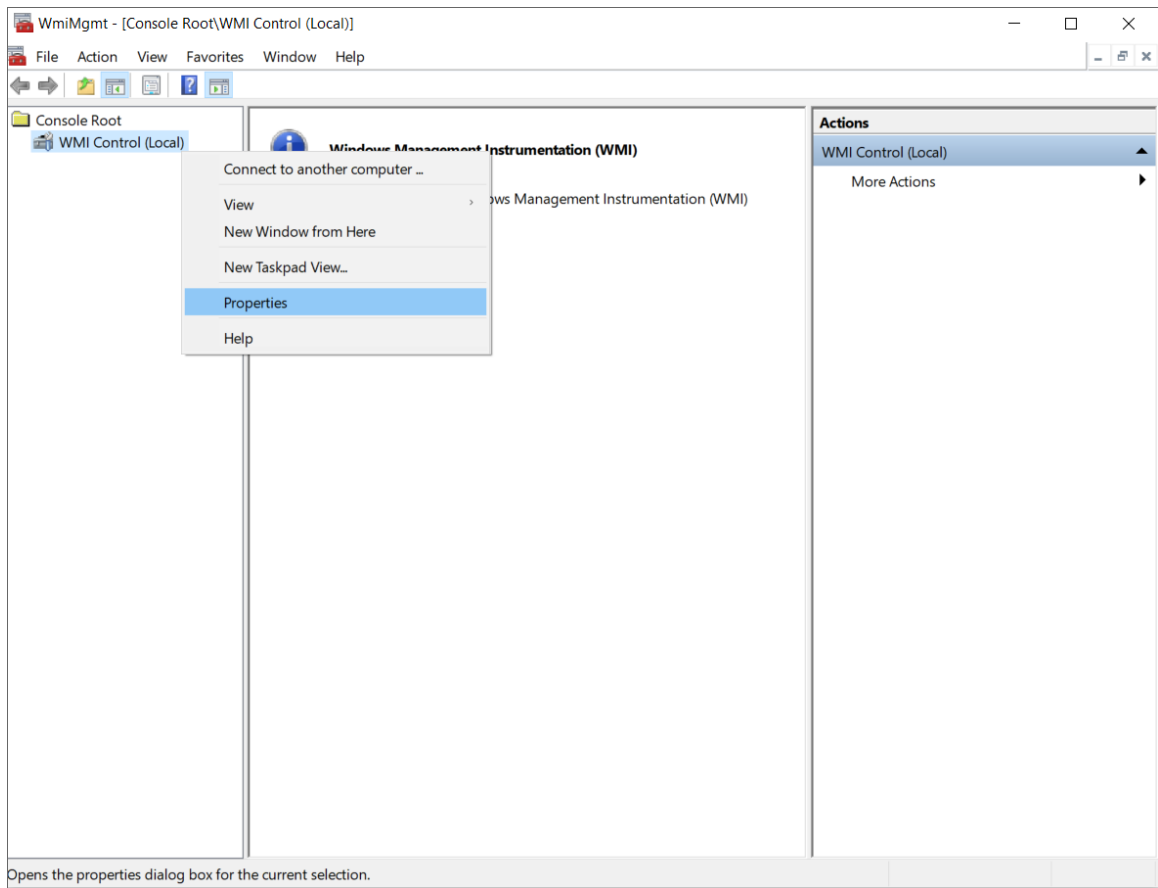


4. In the **WMI Control (Local) Properties** window, click the **[Security]** tab, click **Root**, and then click the **[Security]** button.

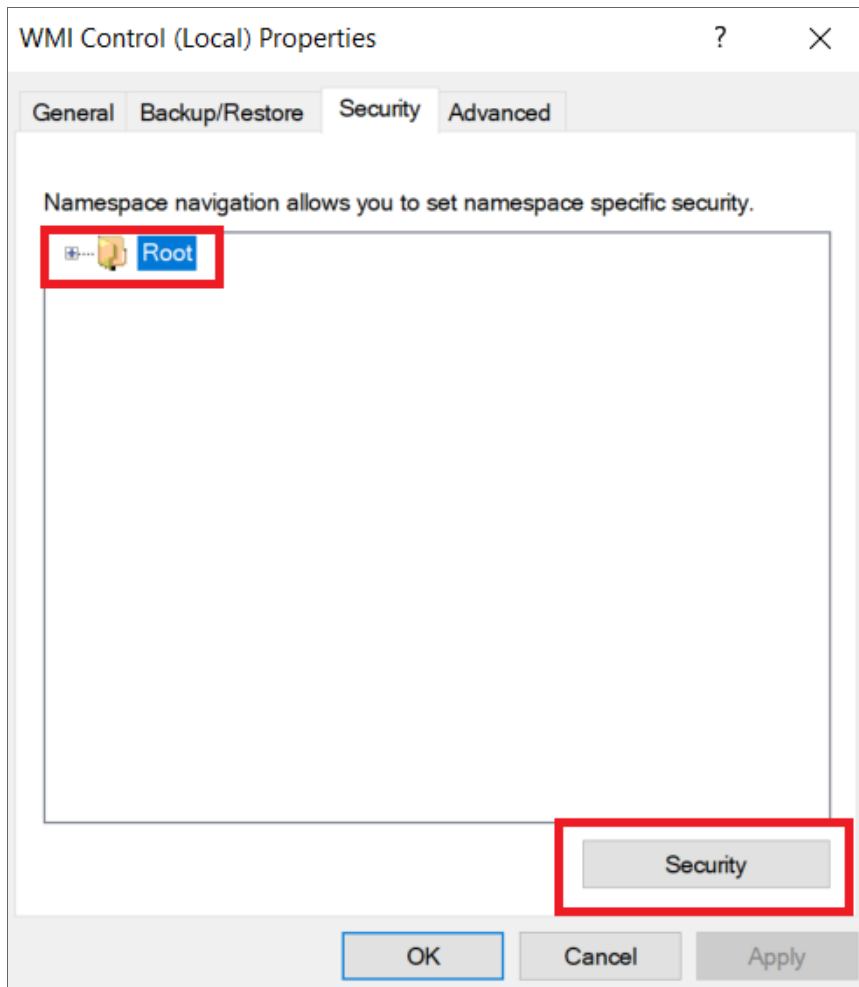


5. In the **Security for Root** window, click **Administrators**, and then click the **[Advanced]** button.

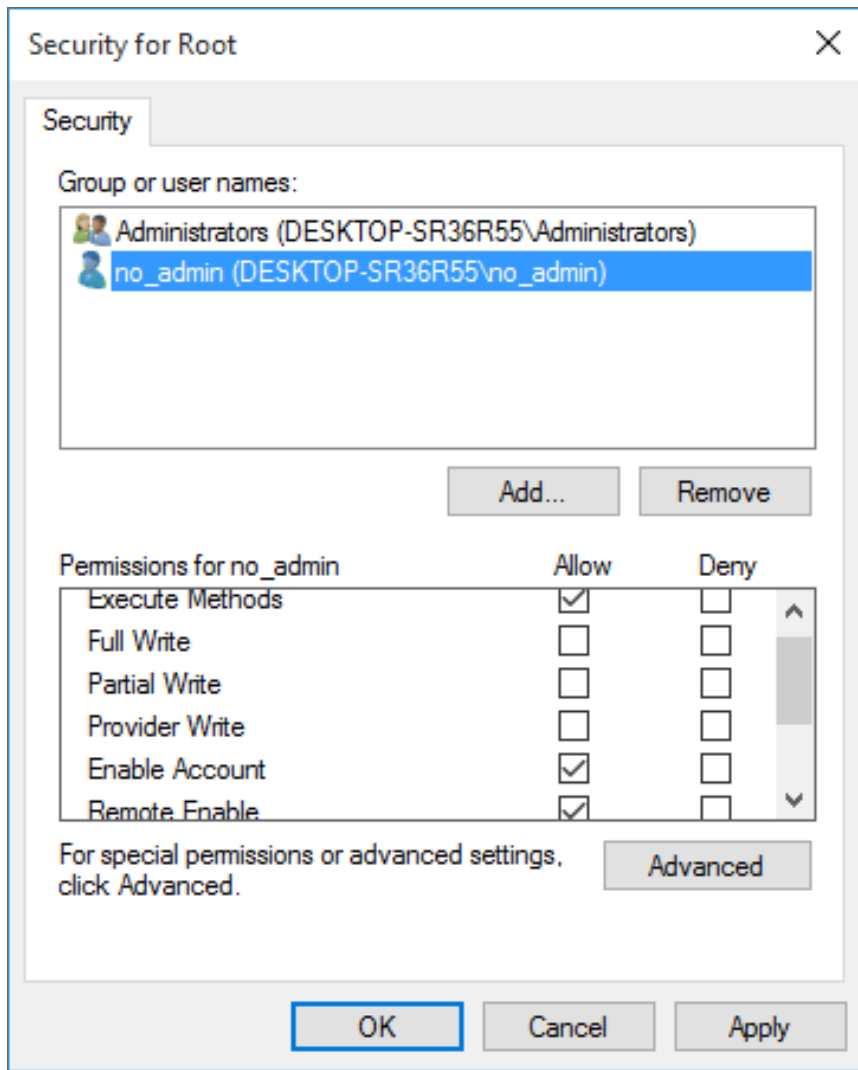

6. In the **Advanced Security Settings for Root** window, click **Administrators**, and then click the **[Edit...]** button.

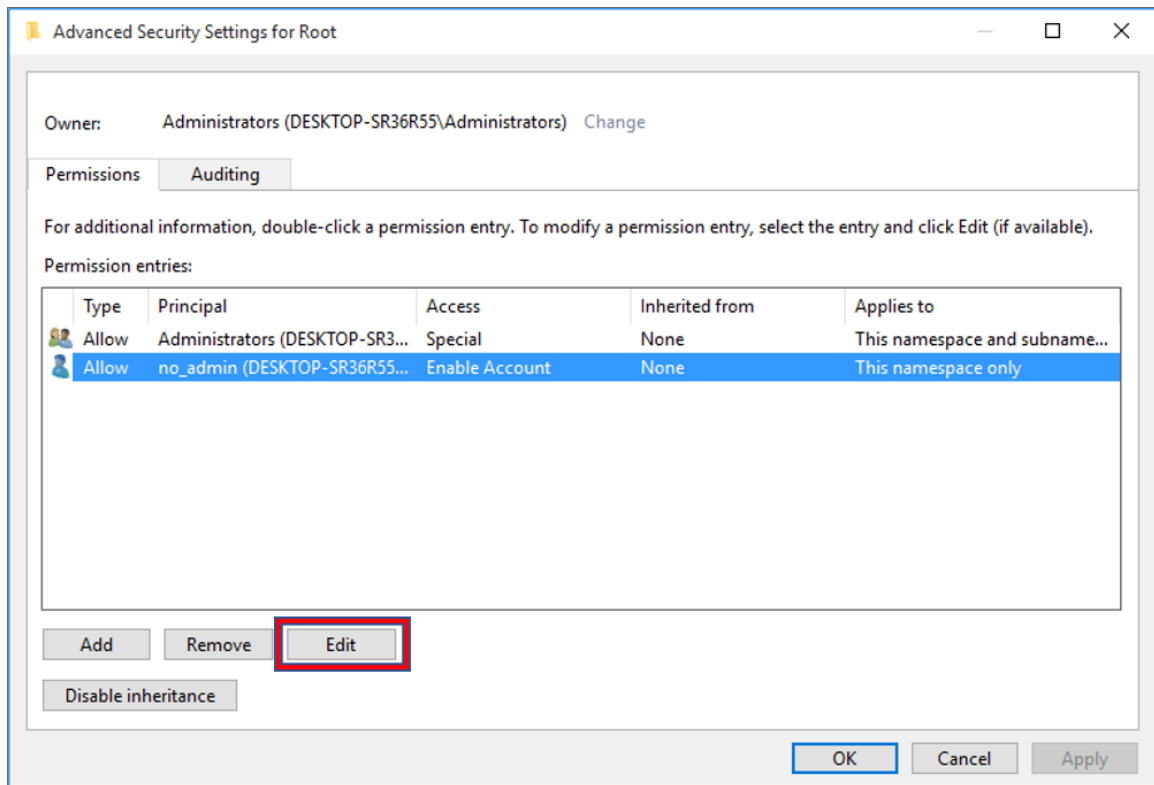

7. In the **Permission Entry for Root** window, enter the following:

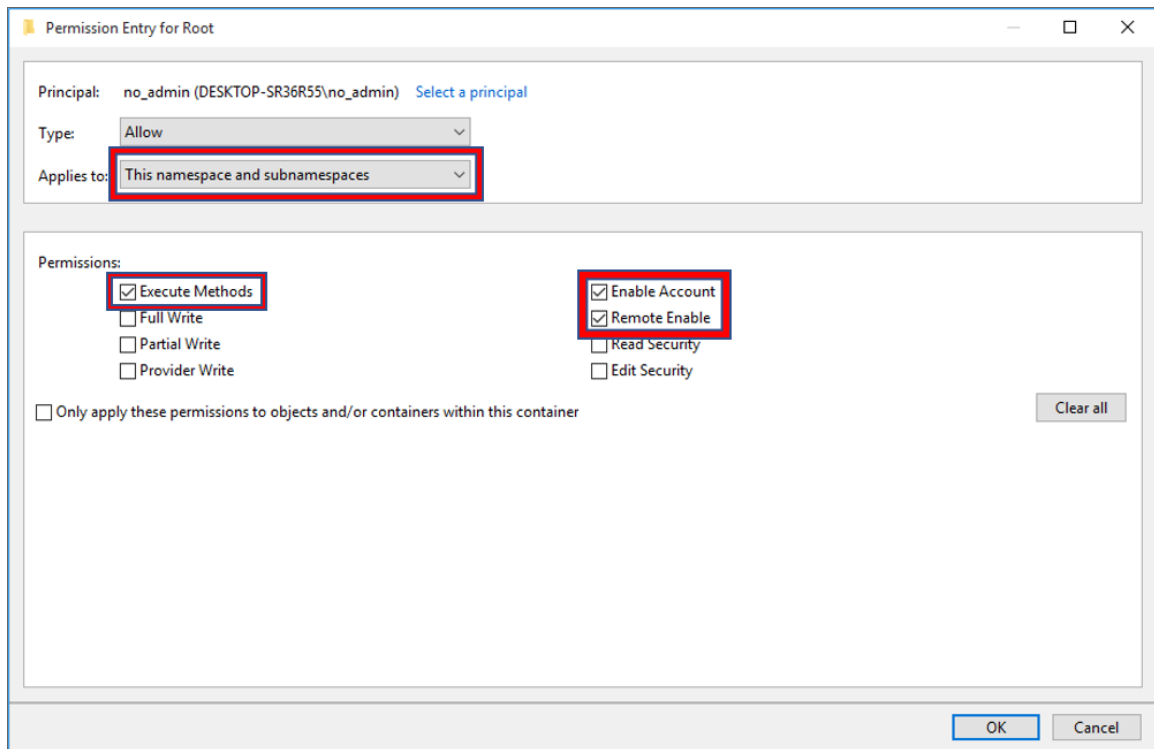

- **Type.** Select *Allow*.
- **Applies to.** Select *This namespace and subnamespaces*.
- **Permissions.** Select the *Execute Methods*, *Full Write*, *Partial Write*, *Provider Write*, *Enable Account*, *Remote Enable*, *Read Security*, and *Edit Security* checkboxes.


8. Click **OK** in this window and the following windows, and then close the **WmiMgmt** window.

Step 4: Setting the DCOM Security Level


To set the DCOM Security Level, perform the following steps:

1. Click the magnifying glass icon in the bottom-left corner and type "dcomcnfg.exe" in the **Search Windows** field.


2. Click the **dcomcnfg.exe** command.

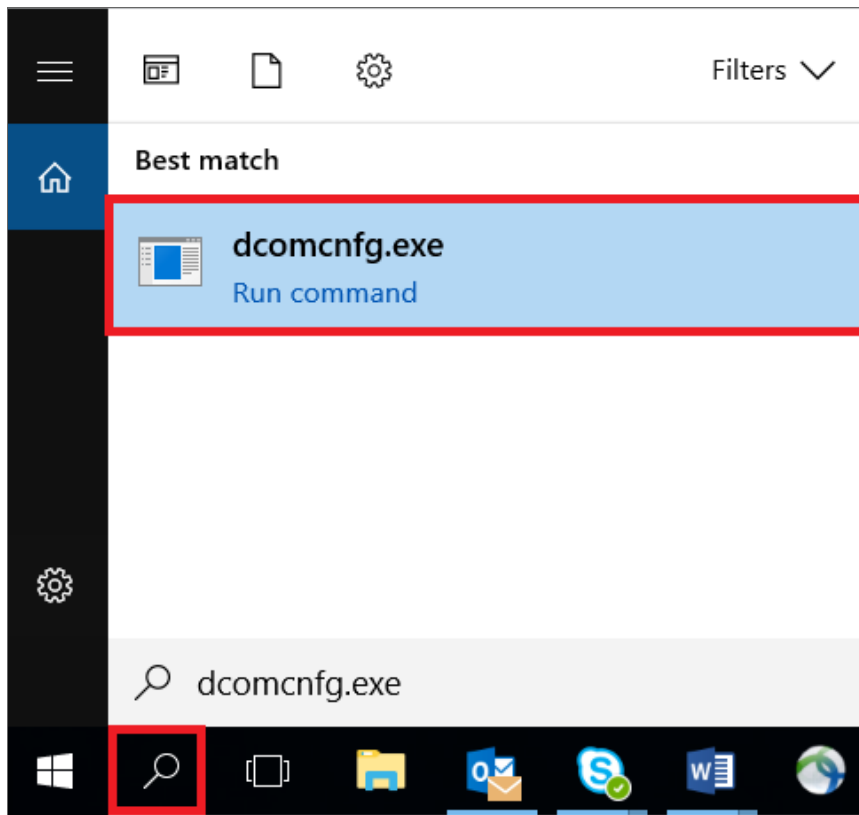

3. In the **Component Services** window, expand **Component Services > Computers**, right-click **My Computer**, and then select *Properties*.

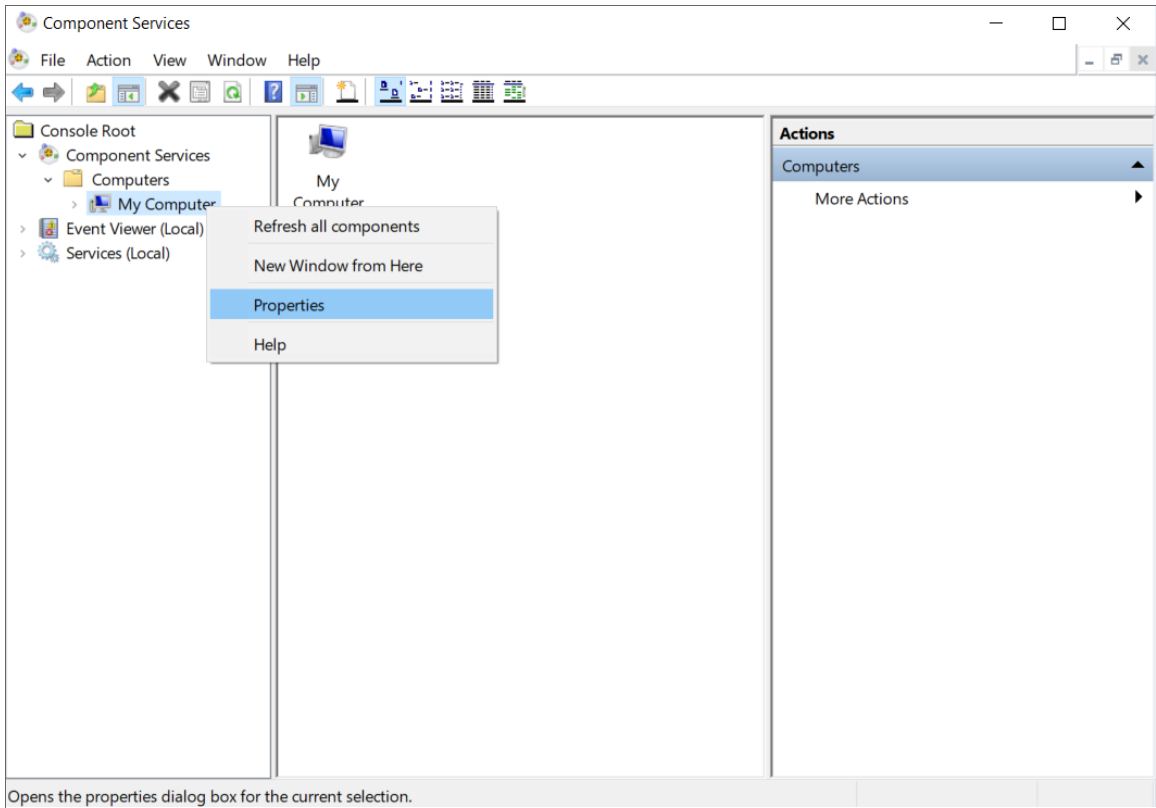


4. In the **My Computer Properties** window, click the **[Default Properties]** tab and then complete the following fields:

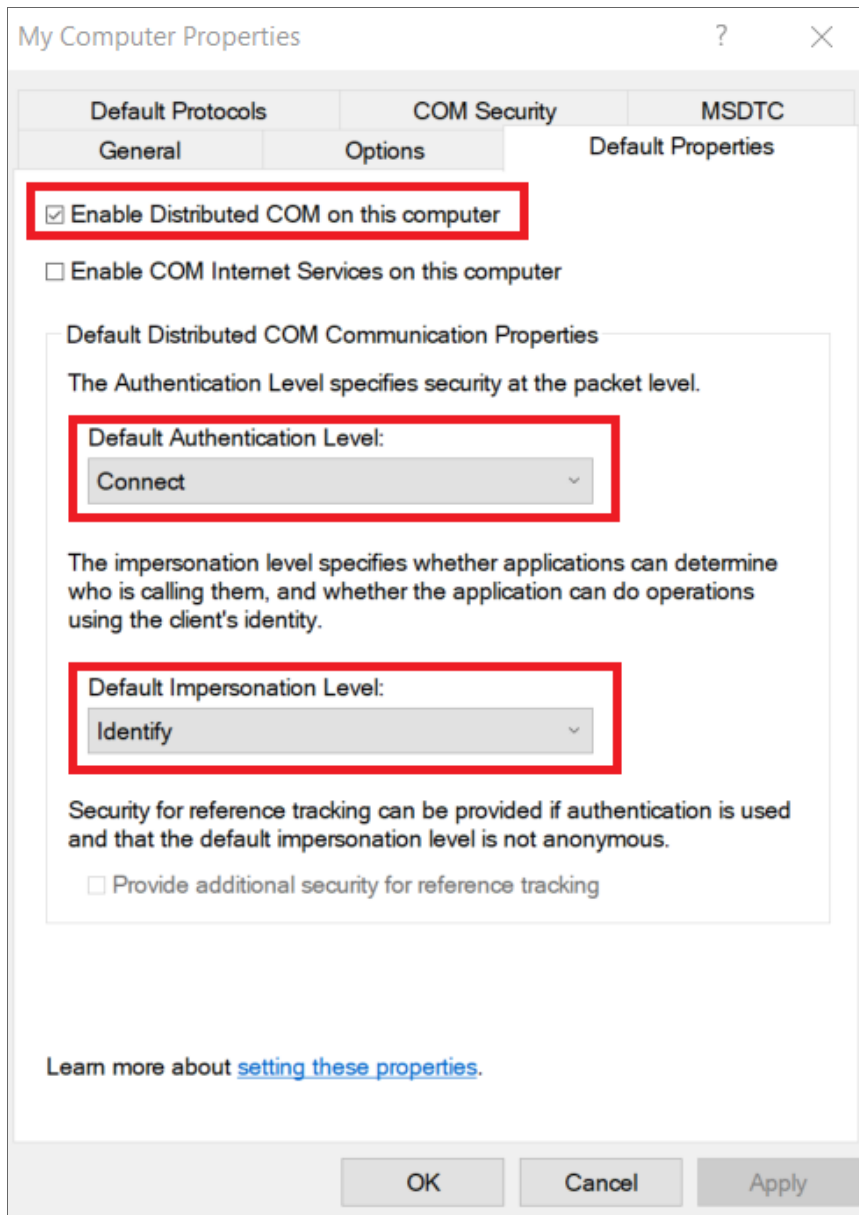


- **Enable Distributed COM on this computer.** Select this checkbox.
- **Default Authentication Level.** Select *Connect*.
- **Default Impersonation Level.** Select *Identify*.

5. In the **My Computer Properties** window, click the **[COM Security]** tab. Under **Launch and Activation Permissions**, click the **[Edit: Default...]** button.

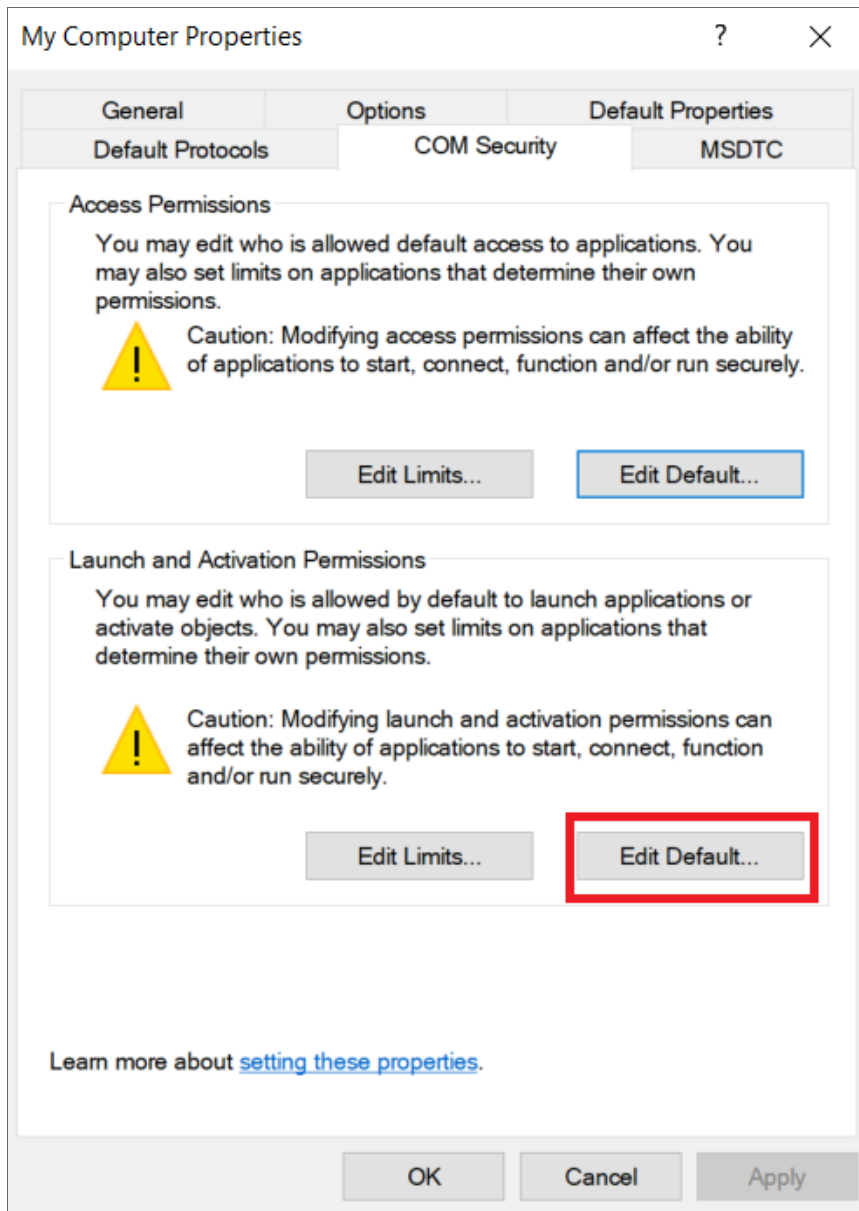


6. In the **Launch and Activation Permission** window, select the following:

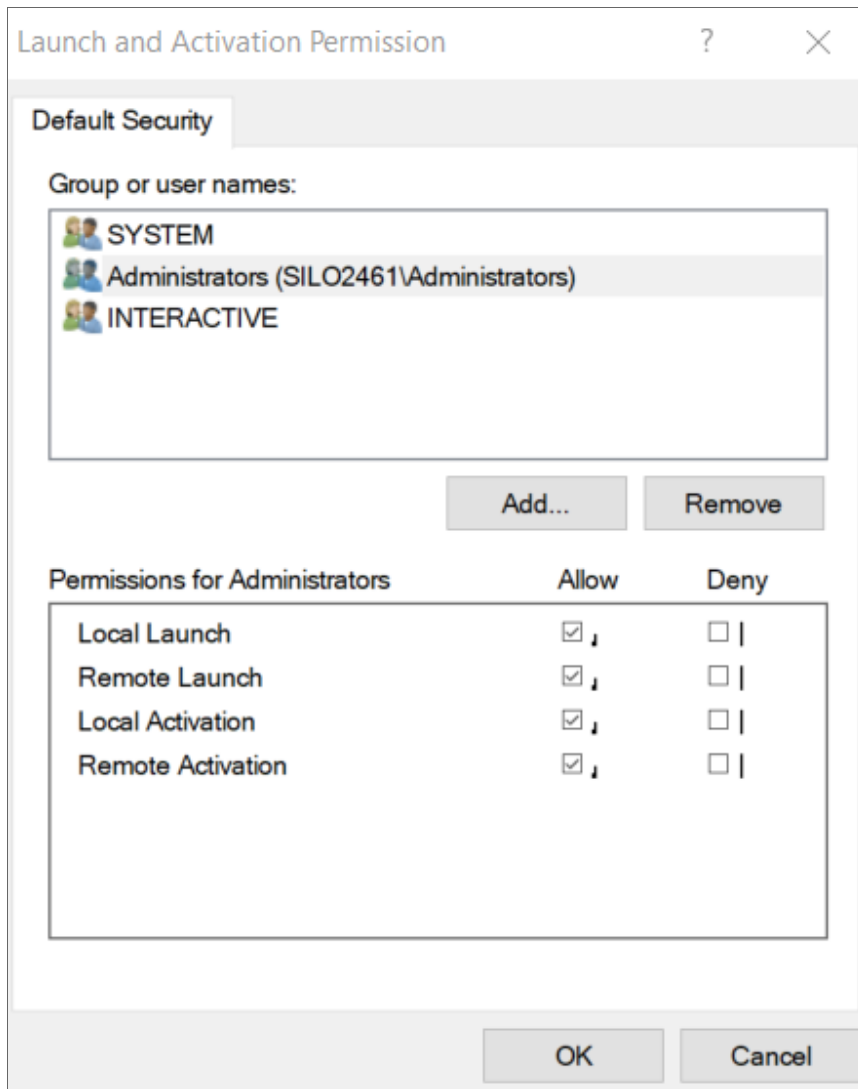


- **Group or user names.** Select *Administrators*.
- **Permissions for Administrators.** Set **Local Launch**, **Remote Launch**, **Local Activation**, and **Remote Activation** to *Allow*.

7. Click **[OK]**.

8. In the **My Computer Properties** window, in the **Launch and Activation Permissions** pane, click the [**Edit Limits...**] button.

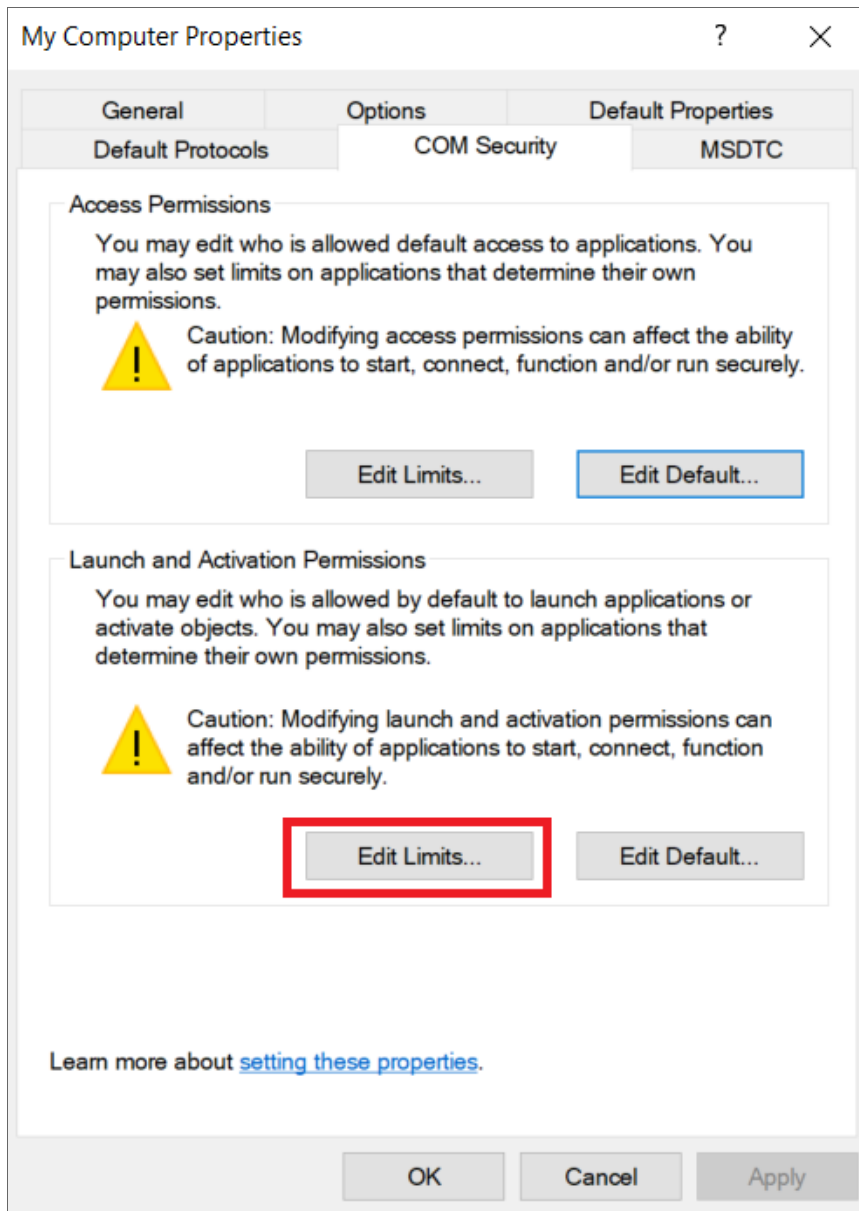

9. In the **Launch Permission** window, select the following:

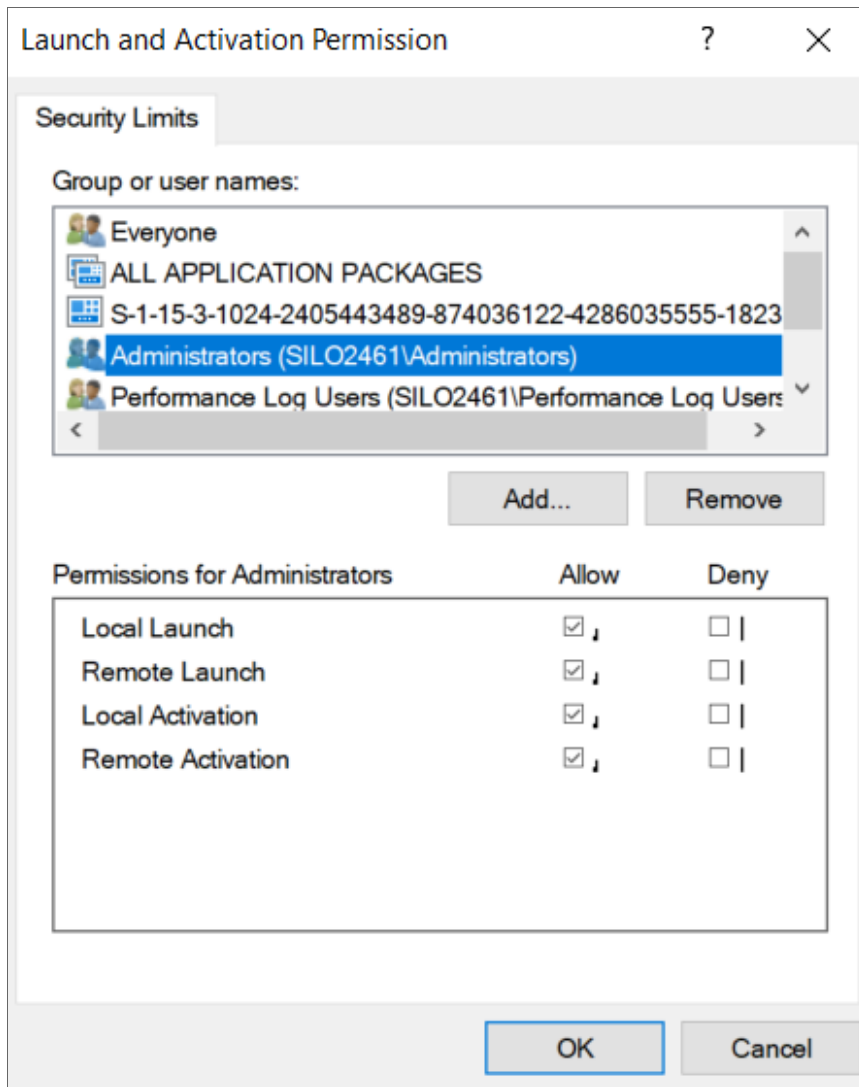

- **Group or user names.** Select *Administrators*.
- **Permissions for Administrators.** Set **Local Launch**, **Remote Launch**, **Local Activation**, and **Remote Activation** to *Allow*.

10. Click **OK** in this window and the following windows, and then close the **Component Services** window.

11. Restart the computer to save the settings.

Step 5: Disabling User Account Control

To monitor a device running Windows 7, 8, or 10, you must perform the following additional steps to disable the User Account Control (UAC) filter for remote logins:

1. Use a text editor such as Notepad to create a new file.

2. Include the following in the file.:

```
Windows Registry Editor Version 5.00
[HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System]
"LocalAccountTokenFilterPolicy"=dword:00000001
```

3. Save the file with a name of your choice, like disableUAC.reg, to the directory of your choice. Make sure to save the new file with the .reg suffix.
4. In Windows Explorer, double click on the .reg file to execute it.

Configuring Devices for Monitoring via PowerShell

Overview

The following sections describe how to configure Windows Server 2016, 2012, 2012 R2, or 2008 R2 for monitoring by SL1 using PowerShell:

<i>Configuring PowerShell</i>	51
Step 1: Configuring the User Account for the ScienceLogic Platform	51
<i>Option 1: Creating an Active Directory Account</i>	52
<i>Option 2: Creating a Local User Account with Administrator Access</i>	52
<i>Option 3: Creating a Non-Administrator Local User Account</i>	53
<i>Optional: Configuring the User Account for Remote PowerShell Access to Microsoft Exchange Server</i>	55
<i>Optional: Configuring the User Account for Remote PowerShell Access to Hyper-V Servers</i>	55
<i>Creating a User Group and Adding a User in Active Directory</i>	55
<i>Setting the Session Configuration Parameters and Group Permissions</i>	56
Step 2: Configuring a Server Authentication Certificate	57
<i>Option 1: Using the Microsoft Management Console to Create a Self-Signed Authentication Certificate</i>	58
<i>Option 2: Using the MakeCert Tool to Create a Self-Signed Authentication Certificate</i>	60
<i>Option 3: Using PowerShell Commands to Create a Self-Signed Authentication Certificate</i>	60
Step 3: Configuring Windows Remote Management	60
<i>Option 1: Using a Script to Configure Windows Remote Management</i>	61
<i>Option 2: Manually Configuring Windows Remote Management</i>	66
<i>Option 3: Using a Group Policy to Configure Windows Remote Management</i>	69

Step 4: Configuring a Windows Management Proxy	87
Step 5: Increasing the Number of PowerShell Dynamic Applications That Can Run Simultaneously ...	88
Creating a PowerShell Credential	88
Error Messages for PowerShell Collection	91

Configuring PowerShell

To monitor a Windows Server using PowerShell Dynamic Applications, you must configure the Windows Server to allow remote access from SL1. To do so, you must perform the following general steps:

1. [Configure a user account](#) that SL1 will use to connect to the Windows Server. The user account can either be a local account or an Active Directory account.

TIP: For ease of configuration, ScienceLogic recommends using an Active Directory account that is a member of the local Administrators group on the Windows Server.

2. [Configure a Server Authentication Certificate](#) to encrypt communication between SL1 and the Windows Server.
3. [Configure Windows Remote Management](#).
4. Optionally, [configure a Windows server as a Windows Management Proxy](#).

NOTE: If you are configuring multiple Windows servers for monitoring by SL1, you can apply these settings using a Group Policy.

5. Optionally, you can [increase the number of PowerShell Dynamic Applications that can run simultaneously](#) against a single Windows server.

Step 1: Configuring the User Account for the ScienceLogic Platform

To enable SL1 to monitor Windows servers, you must first configure a user account on a Windows Server that SL1 can use to make PowerShell requests. You will include this user account information when creating the PowerShell credential that SL1 uses to collect data from the Windows Server.

To configure the Windows Server user account that SL1 can use to make PowerShell requests, complete one of the following options:

- **Option 1:** [Create an Active Directory Account with Administrator access](#)
- **Option 2:** [Create a local user account with Administrator access](#)
- **Option 3:** [Create a non-administrator user account](#)

TIP: For ease-of-configuration, ScienceLogic recommends creating an Active Directory user account.

After creating your Windows Server user account, depending on your setup and the servers you want to monitor, you might also need to configure the user account for remote PowerShell access to the following server types:

- [Microsoft Exchange Server](#)
- [Hyper-V Servers](#)

Option 1: Creating an Active Directory Account

For each Windows server that you want to monitor with PowerShell or WinRM, you can create an Active Directory account that is a member of the local Administrators group on each server. For instructions, consult Microsoft's documentation. On Windows Domain Controller servers, you can use a domain account that is not in the Domain Administrators group by following the configuration instructions for [Option 3: Creating a Non-Administrator User Account](#).

After creating your Active Directory account:

- If you use SL1 to monitor Microsoft Exchange Servers, you must [configure the user account for remote PowerShell access to Microsoft Exchange Server](#).
- If you use SL1 to monitor Hyper-V Servers, you must [configure the user account for remote PowerShell access to the Hyper-V Servers](#).
- Otherwise, *you can skip the remainder of this section and proceed to Step 3.*

Option 2: Creating a Local User Account with Administrator Access

If you have local Administrator access to the servers you want to monitor and are monitoring Windows Server 2016 or Windows Server 2012, you can alternatively create a local user account with membership in the Administrators group instead of an Active Directory account. For instructions, consult Microsoft's documentation.

WARNING: This method does not work for Windows Server 2008.

After creating your local user account with Local Administrator access:

- If you use SL1 to monitor Microsoft Exchange Servers, you must [configure the user account for remote PowerShell access to Microsoft Exchange Server](#).
- If you use SL1 to monitor Hyper-V Servers, you must [configure the user account for remote PowerShell access to the Hyper-V Servers](#).
- Otherwise, *you can skip the remainder of this section and proceed to Step 2*.

Option 3: Creating a Non-Administrator Local User Account

If you do not have Local Administrator access to the servers that you want to monitor with PowerShell or WinRM, or if the monitored Windows server is a Domain Controller that will not be in the local Administrators group, then you must first create a domain user account or create a local user account on the Windows Server. For instructions, consult Microsoft's documentation.

After creating your domain user account or local user account:

- You must configure the Windows servers to allow that non-administrator user access. To do so, **follow the steps in this section**.
- If you use SL1 to monitor Microsoft Exchange Servers, you must also [configure the user account for remote PowerShell access to Microsoft Exchange Server](#).
- If you use SL1 to monitor Hyper-V Servers, you must also [configure the user account for remote PowerShell access to the Hyper-V Servers](#).

To configure Windows Servers to allow access by your non-administrator user account:

1. Start a Windows PowerShell shell with **Run As Administrator** and execute the following command:

```
winrm configsdcl default
```

2. On the **Permissions for Default** window, click the **[Add]** button, and then add the non-administrator user account.
3. Select the *Allow* checkbox for the **Read (Get, Enumerate, Subscribe)** and **Execute (Invoke)** permissions for the user, and then click **[OK]**.
4. Access the Management console. To do this:
 - In Windows Server 2008, click **[Start]**, right-click **[Computer]**, click **[Manager]**, and then expand **[Configuration]**.
 - In Windows Server 2016 and 2012, right-click the Windows icon, click **[Computer Management]**, and then expand **[Services and Applications]**.
5. Right-click on **[WMI Control]** and then select *Properties*.
6. On the **WMI Control Properties** window, click the **[Security]** tab, and then click the **[Security]** button.
7. Click the **[Add]** button, and then add the non-administrator user or group in the **Select Users, Service Accounts, or Groups** dialog, then click **[OK]**.

8. On the **Security for Root** window, select the user or group just added, then in the **Permissions** section at the bottom of the window, select the **Allow** checkbox for the *Execute Methods*, *Enable Account*, and *Remote Enable* permissions.
9. Under the **Permissions** section of the **Security for Root** window, click the **[Advanced]** button.
10. In the **Advanced Security Settings** window, double-click on the user account or group you are modifying.
11. On the **Permission Entry** window, in the **Type** field, select *Allow*.
12. In the **Applies to** field, select *This namespace and subnamespaces*.
13. Select the **Execute Methods**, **Enable Account**, and **Remote Enable** permission checkboxes, and then click **[OK]** several times to exit the windows opened for setting WMI permissions.
14. Restart the WMI Service from services.msc.

NOTE: To open services.msc, press the Windows + R keys, type "services.msc", and then press Enter.

15. In the Management console, go to System Tools > Local Users and Groups > Groups.
16. Right-click **Performance Monitor Users**, and then select *Properties*.
17. On the **Performance Monitor Users Properties** window, click the **[Add]** button.
18. In the **Enter the object names to select** field, type the non-administrator domain user or group name, and then click **[Check Names]**.
19. Select the user or group name from the list and then click **[OK]**.
20. In the **Performance Monitor Users Properties** window, click **[OK]**.
21. Perform steps 16-20 for the **Event Log Readers** user group and again for the **Distributed COM Users** user group, the **Remote Management Users** user group, and if it exists on the server, the **WinRMRemoteWMIUsers__** user group.
22. If you intend to use encrypted communications between the SL1 collector host and your monitored Windows servers, each Windows server must have a digital certificate installed that has "Server Authentication" as an Extended Key Usage property. You can create a self-signed certificate for WinRM by executing the following command:

```
$Cert = New-SelfSignedCertificate -CertstoreLocation Cert:\LocalMachine\My -DnsName "myHost"
```

23. Add an HTTPS listener by executing the following command:

```
New-Item -Path WSMAN:\localhost\Listener -Transport HTTPS -Address * -CertificateThumbPrint $Cert.Thumbprint -Force
```

NOTE: This command should be entered on a single line.

24. Ensure that your local firewall allows inbound TCP connections on port 5986 if you are going to use encrypted communications between the SL1 collector(s) and the Windows server, or port 5985 if you will be

using unencrypted communications between the two. You may have to create a new rule on Windows Firewall if one does not already exist.

Optional: Configuring the User Account for Remote PowerShell Access to Microsoft Exchange Server

If you use SL1 to monitor Microsoft Exchange Servers:

1. Follow the steps in the section [Configuring the User Account for SL1](#).
2. Add the new user account to the “Server Management” Exchange security group in Active Directory.
3. The user account will then be able to connect to the relevant WinRM endpoint to use cmdlets installed with the Exchange Management Shell. For example, this will give the user account access to the cmdlet “Get-ExchangeServer”.

Optional: Configuring the User Account for Remote PowerShell Access to Hyper-V Servers

To use PowerShell Dynamic Applications to monitor a Hyper-V server, you must:

- Create a user group in Active Directory
- Add the user account you will use to monitor the Hyper-V server to the group
- Set the session configuration parameters on the Hyper-V Server
- Set the group permissions on the Hyper-V Server
- Create a PowerShell credential using the new user account

Creating a User Group and Adding a User in Active Directory

To create a group in Active Directory and add a user:

1. In Active Directory, in the same DC as the Hyper-V host you want to monitor, in the OU called **Users**, create a group. For example, we called our group **PSSession Creators**.
2. Add a user that meets the requirements for monitoring a Windows server via PowerShell to the group. This is the user that you will specify in the PowerShell credential.

NOTE: For details on using Active Directory to perform these tasks, consult Microsoft's documentation.


Setting the Session Configuration Parameters and Group Permissions

To set the Session Configuration and the Group Permissions on the Hyper-V Server:

1. Login to the Hyper-V server.
2. Open a PowerShell session. Enter the following command:

```
Set-PSSessionConfiguration -ShowSecurityDescriptorUI -Name Microsoft.PowerShell
```

3. When prompted, select **A**.
4. The **Permissions** dialog appears.

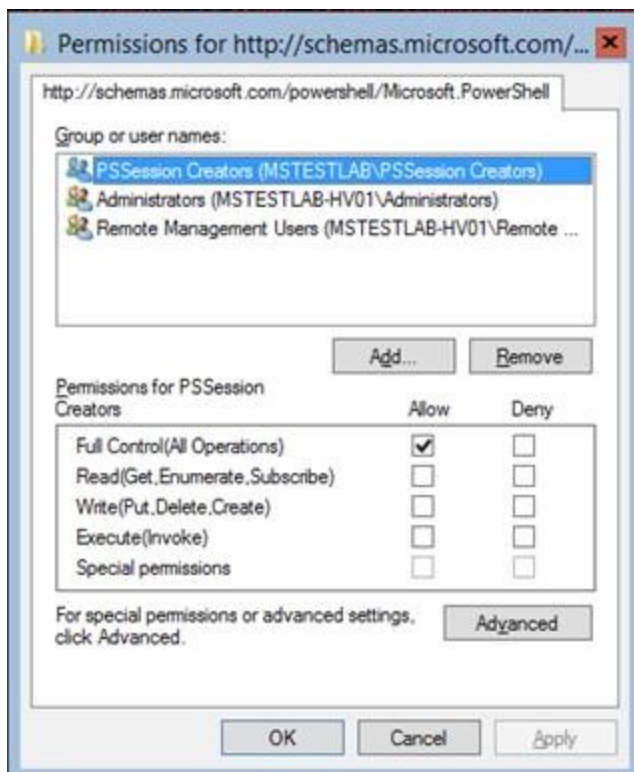

5. In the **Permissions** dialog, supply values in the following fields:
 - **Group or user names.** Select the name of the group you created in Active Directory.
 - **Permissions for group.** For **Full Control (All Operations)**, select the *Allow* checkbox.
6. Click the **[OK]** button.

Step 2: Configuring a Server Authentication Certificate

ScienceLogic highly recommends that you encrypt communications between SL1 and the Windows Servers you want it to monitor.

If you have created a **local account on the Windows Server that uses Basic Auth** and that account will allow communication between SL1 and the Windows server, the best practice for security is to enable HTTPS to support encrypted data transfer and authentication. To do this, you must configure WinRM to listen for HTTPS requests. This is called configuring an HTTPS listener.

NOTE: For details on configuring WinRM on your Windows servers to use HTTPS, see <https://support.microsoft.com/en-us/help/2019527/how-to-configure-winrm-for-https>.

The sections below describe how to configure a Server Authentication Certificate on the Windows Server. This is only one task included in configuring an HTTPS listener. However, not all users need to configure a Server Authentication Certificate. You can find out if your Windows computer has a digital certificate installed for Server Authentication by running `'Get-ChildItem -Path Cert:\LocalMachine\My -EKU "*Server Authentication*"'` from a PowerShell command shell.

To support encrypted data transfer and authentication between SL1 and the servers, one of the following must be true:


- You have created an **Active Directory** user account on the Windows Server to allow communication between SL1 and the server. In this scenario, Active Directory will use Kerberos and AES-256 encryption to ensure secure data transfer and authentication, which means you do not need to configure a self-signed Server Authentication Certificate. **You can skip this section and proceed to Step 3.**
- You have created a **local account** on the Windows Server that uses Basic Auth to allow communication between SL1 and the server, and your network **includes a Microsoft Certificate server**. In this scenario, you should work with your Microsoft administrator to get a certificate for your Windows Server instead of configuring a self-signed Server Authentication Certificate. **You can skip this section and proceed to Step 3.**
- You have created a **local account** on the Windows Server that uses Basic Auth to allow communication between SL1 and the server, and your network **does not include a Microsoft Certificate server**. In this scenario, you must configure a self-signed Server Authentication Certificate on the Windows Server that you want to monitor with SL1 using one of the following methods:
 - **Option 1: Use the Microsoft Management Console.**
 - **Option 2:** If your Windows Server includes Windows Software Development Kit (SDK), you can **use the makecert tool.**
 - **Option 3:** If you are running PowerShell 4.0 or later, you can **use the New-SelfSignedCertificate and Export-PfxCertificate commands.**

NOTE: Self-signed certificates are appropriate for use on a trusted network, such as a LAN that includes both a ScienceLogic Data Collector and the Windows Server to be monitored.

Option 1: Using the Microsoft Management Console to Create a Self-Signed Authentication Certificate


To use the **Microsoft Management Console** to create a self-signed certificate:

1. Log in to the Windows Server that you want to monitor with SL1.
2. In the Start menu search bar, enter "mmc" to open a **Microsoft Management Console** window.
3. Select **[File]**, then *Add/Remove Snap-Ins*. The **Add or Remove Snap-ins** window is displayed:

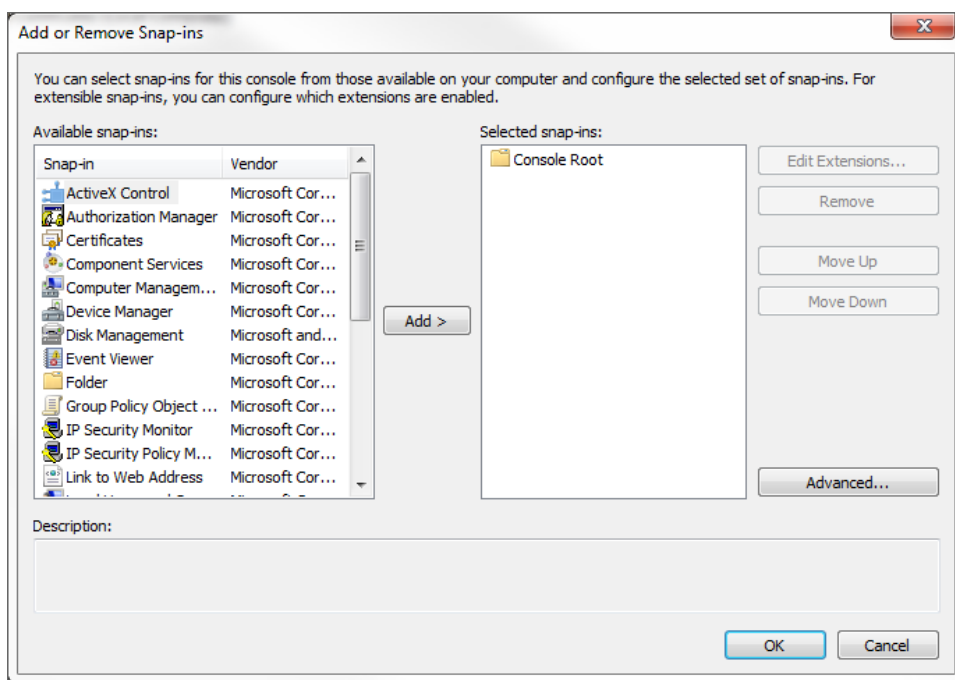

4. In the **Available snap-ins** list, select *Certificates*.

5. Click the **[Add >]** button. The **Certificates snap-in** window is displayed:

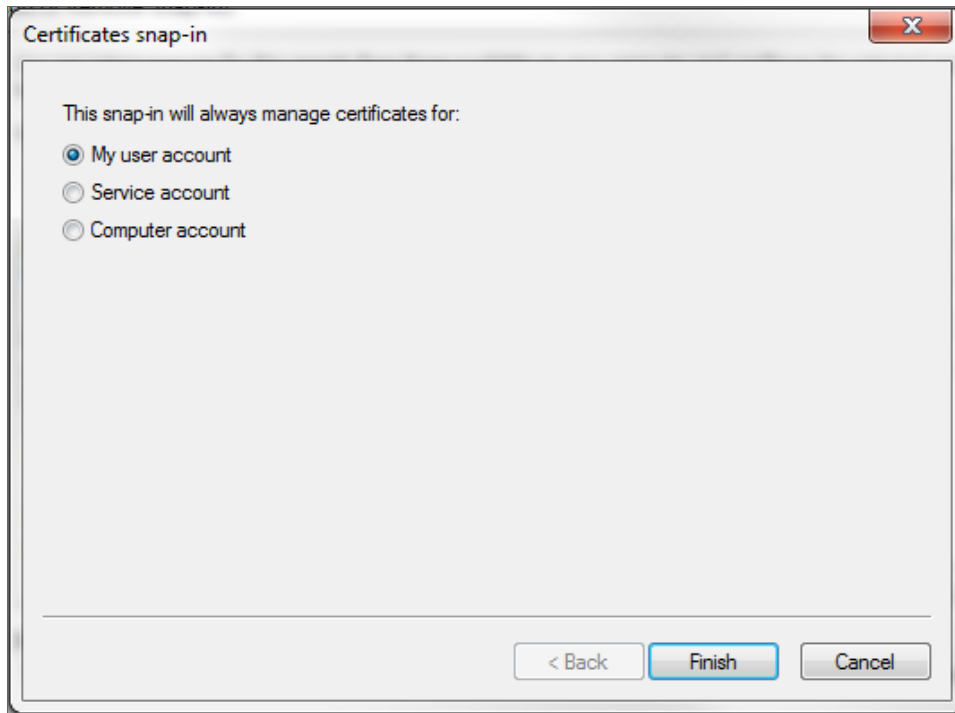

6. Select *Computer account*.
7. Click the **[Next >]** button.
8. Click the **[Finish]** button.
9. In the **Add or Remove Snap-ins** window, click the **[OK]** button.
10. In the left pane of the **Microsoft Management Console** window, navigate to Console Root > Certificates (Local Computer) > Personal.
11. Right-click in the middle pane and select *All Tasks > Request New Certificate...* The **Certificate Enrollment** window is displayed.
12. Click the **[Next]** button. The **Select Certificate Enrollment Policy** page is displayed.
13. Select *Active Directory Enrollment Policy*.
14. Click the **[Next]** button. The **Request Certificates** page is displayed.
15. Select the **Computer** checkbox.
16. Click the **[Enroll]** button.
17. After the certificate is installed, click the **[Finish]** button.

Option 2: Using the MakeCert Tool to Create a Self-Signed Authentication Certificate

If your Windows system includes Windows Software Development Kit (SDK), you can use the MakeCert tool that is included in the kit to create a self-signed certificate.

- For information on the MakeCert tool, see:

<https://msdn.microsoft.com/library/windows/desktop/aa386968.aspx>

- For details on creating a self-signed certificate with MakeCert and installing the certificate in the Trusted Root Certification Authorities store, see:

<https://msdn.microsoft.com/en-us/library/ms733813%28v=vs.110%29.aspx>

Option 3: Using PowerShell Commands to Create a Self-Signed Authentication Certificate

If your Windows system includes PowerShell 4.0 or later, you can use the following PowerShell commands to create a self-signed certificate:

- You can use the **New-SelfSignCertificate** command to create a self-signed certificate. For information on **New-SelfSignCertificate**, see:

<https://docs.microsoft.com/en-us/powershell/module/pkiclient/new-selfsignedcertificate?view=win10-ps>

- You can use the **Export-PfxCertificate** command to export the private certificate. For information on the **Export-PfxCertificate**, see:

<https://docs.microsoft.com/en-us/powershell/module/pkiclient/export-pfxcertificate?view=win10-ps>

Step 3: Configuring Windows Remote Management

To provide SL1 remote access to the Windows Servers you want to monitor, you must configure Windows Remote Management.

NOTE: This step is required regardless of the user account type that SL1 will use to connect to the Windows Server.

There are three ways to configure Windows Remote Management:

- **Option 1:** *Use the script provided by ScienceLogic.*
- **Option 2:** *Manually perform the configuration.*
- **Option 3:** *Use a group policy.*

Option 1: Using a Script to Configure Windows Remote Management

ScienceLogic provides a PowerShell script on the ScienceLogic portal that automates configuration of Windows Remote Management and permissions required for the user account that will be used in the SL1 credential. The script configures all of the base Windows permissions required, except for opening up Windows Firewall ports for HTTP and/or HTTPS traffic. The configuration performed by the script is useful primarily for running collection with the **Microsoft: Windows Server**, **Microsoft: Windows Server Services**, **Microsoft: Windows Server Event Logs**, and **Microsoft: SQL Server Enhanced** PowerPacks. (Microsoft: SQL Server Enhanced requires further instance-specific permissions. See the **Monitoring SQL Servers** manual for more information.)

To use the PowerShell script, perform the following steps:

1. Log in to the ScienceLogic portal, go to **Downloads > Miscellaneous**, and download the PowerShell script named **WinRM Configuration Wizard Script (winrm_configuration_wizard.ps1)**. The link is : <https://portal.sciencelogic.com/portal/miscellaneous/download/3943>
2. Unzip the downloaded file.
3. Using the credentials for an account that is a member of the Administrator's group, log in to the Windows server you want to monitor. You can log in directly or use Remote Desktop to log in.
4. Copy the PowerShell script named **winrm_configuration_wizard.ps1** to the Windows server that you want to monitor with SL1.
5. Right-click on the PowerShell icon and select **Run As Administrator**.
6. At the PowerShell prompt, navigate to the directory where you copied the PowerShell script named **winrm_configuration_wizard.ps1**.
7. At the PowerShell prompt, enter the following to enable execution of the script:

```
Set-ExecutionPolicy -ExecutionPolicy Unrestricted -Scope Process -Force
```

NOTE: The execution policy setting persists only during the current PowerShell session.

8. After the warning text, select Y.

NOTE: If your Windows configuration requires further steps to allow execution of the script, PowerShell will display prompts. Follow the prompts.

9. To run the script with interactive dialogs, enter the following at the PowerShell prompt:

```
.\winrm_configuration_wizard.ps1 -user <domain>\<username>
```


The user account you wish to use for SL1 collection must be specified with the `-user` command-line argument regardless of other arguments used. You can obtain the full help for the PowerShell configuration script by entering the following:

```
help .\winrm_configuration_wizard.ps1 -full
```



The most common way to run the script is silently:

```
.\winrm_configuration_wizard.ps1 -user <domain>\<username> -silent
```


10. If you start the script without using the `-silent` command-line argument, the **WinRM Installation Wizard** modal page appears. Click **[OK]**.

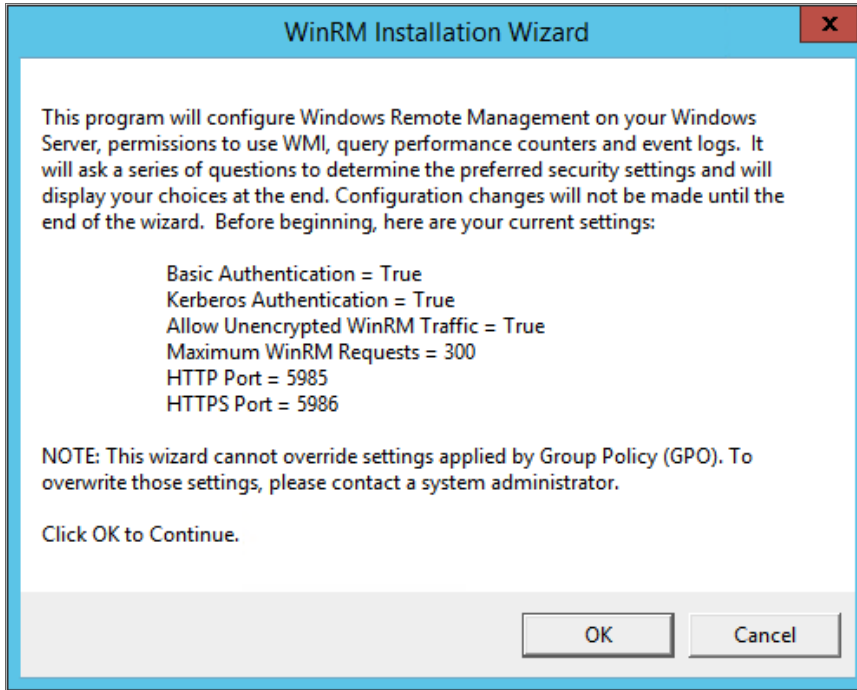


11. The **Windows Account Type** modal page appears. Select the appropriate choice for your environment.

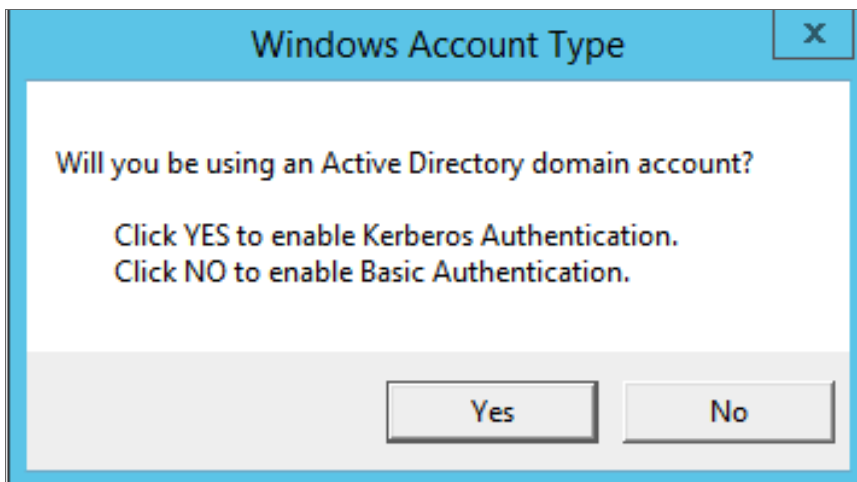


12. The **Set Encryption Policy** modal page appears. Select the appropriate choice for your environment.

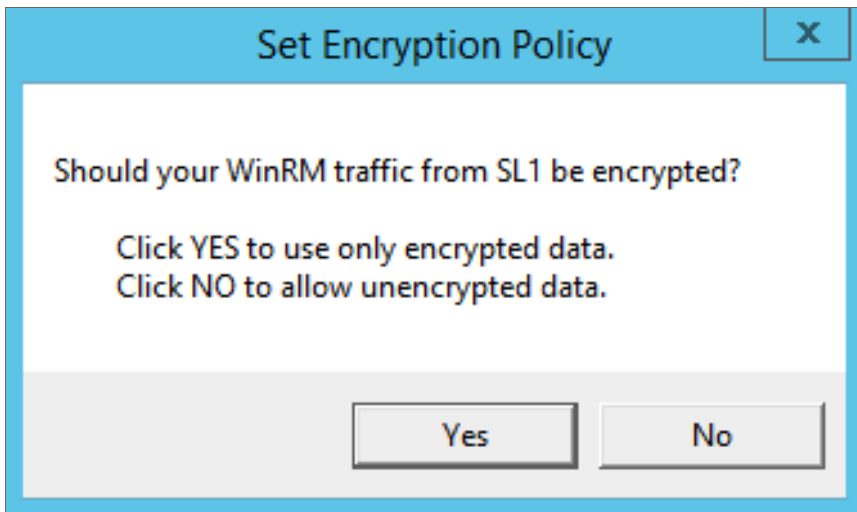


- **Click YES to use only encrypted data.** Click Yes to configure an HTTPS listener for using encrypted communications between the SL1 collectors and the Windows server. Setting up an HTTPS listener requires a digital certificate with Server Authentication ECU to be available on the server. For information on creating a self-signed certificate, see [Configuring a Server Authentication Certificate](#).
 - **Click NO to allow unencrypted data.** For communication between SL1 collectors and the Windows server, if unencrypted traffic is allowed, an HTTP listener will be configured for communication.
13. The **Change Max Requests** modal page appears. Click [Yes].

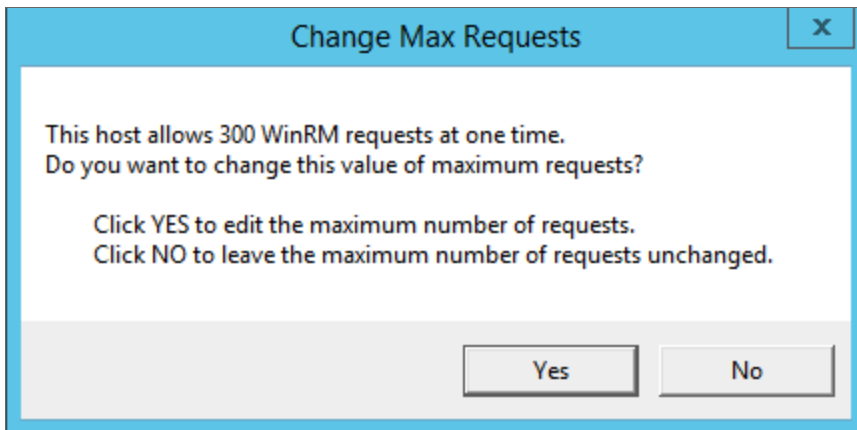


14. The **Set Ports for WinRM Traffic** modal page appears, and it shows the current settings for the HTTP and HTTPS ports. If you want to make a change to these, click **[YES]**; otherwise, click **[NO]** to continue.

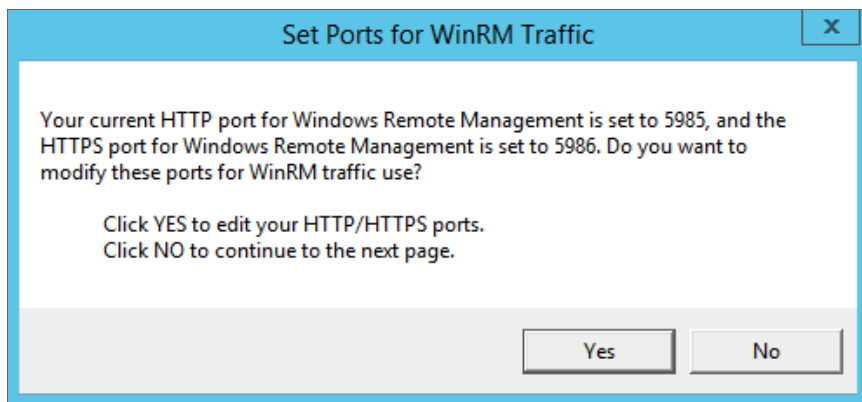

15. Choose which port values you would like SL1 to use when communicating with the Windows server.

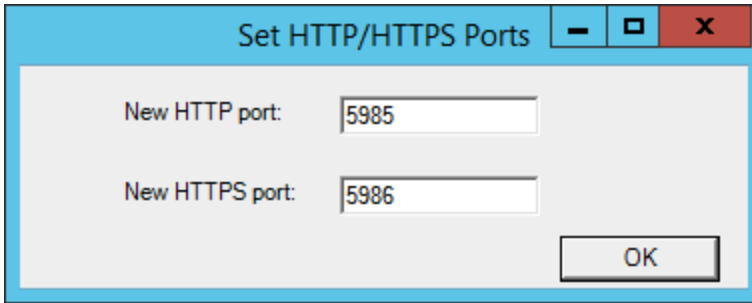


16. The **Set HTTPS Thumbprint** modal page appears. Enter the information for your certificate thumbprint, which is used to create an HTTPS listener, then click **[OK]**.

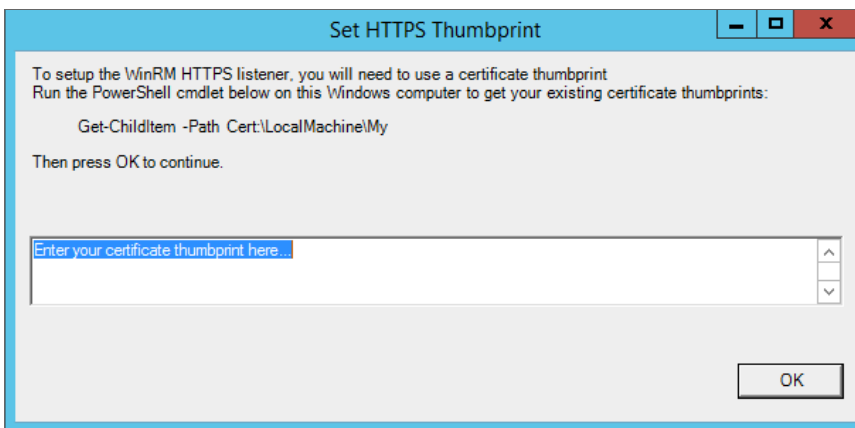


NOTE: If the certificate structure for your certificate thumbprint is incomplete or incorrect, an error message appears indicating that the WinRM client cannot process the request. If you think you made an error, click **[OK]** and try to correct it. Otherwise, contact a system administrator for help.

17. The **Confirm Settings** modal page appears. If the settings are as you specified, click **[OK]**.

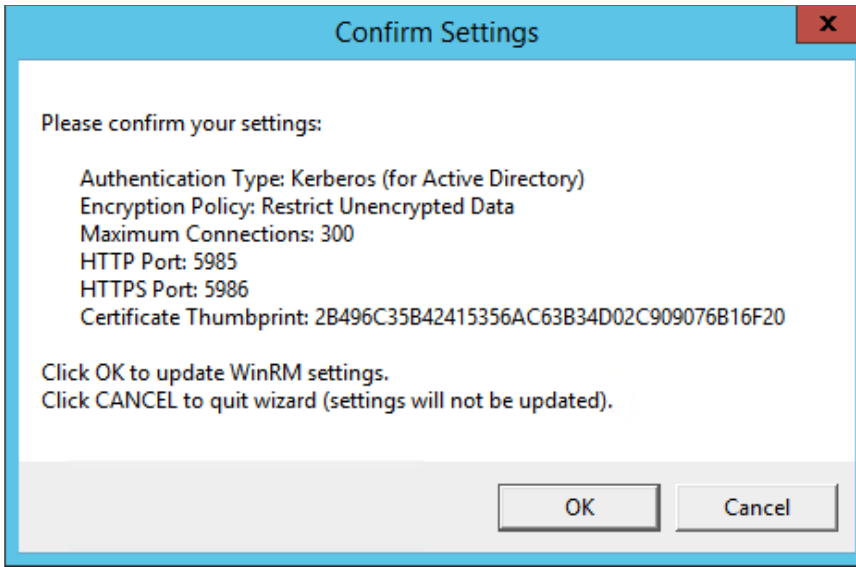

18. The **Complete** modal page appears. If the settings are correct, click **[OK]**.

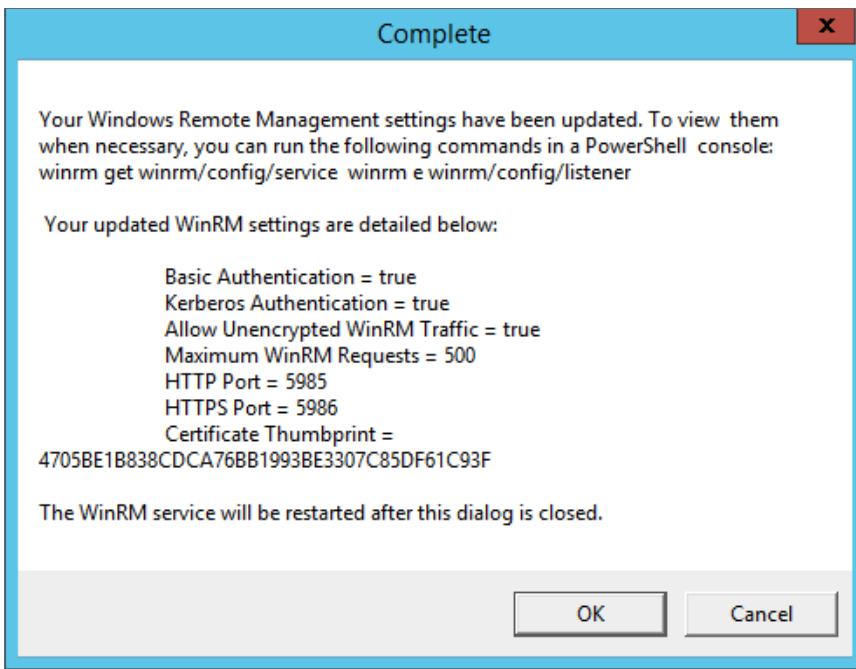

19. Exit the PowerShell session.

Option 2: Manually Configuring Windows Remote Management

To configure a Windows server for monitoring via PowerShell directly, perform the following steps:

1. Log in to the server with an account that is a member of the local Administrators group, or a Domain Administrator's account if on a Windows server with the Domain Controller role installed.
2. Right-click on the PowerShell icon in the taskbar or the **Start** menu, and select *Run as Administrator*.
3. Execute the following command:


```
Get-ExecutionPolicy
```
4. If the output is "Restricted", execute the following command:


```
Set-ExecutionPolicy RemoteSigned
```
5. Enter "Y" to accept.
6. Execute the following command:


```
winrm quickconfig
```
7. Enter "Y" to accept.
8. If you are configuring this Windows server for encrypted communication, execute the following command:


```
winrm quickconfig -transport:https
```
9. Enter "Y" to accept.
10. Execute the following command:


```
winrm get winrm/config
```

The output should look like this (additional lines indicated by ellipsis):

```
Config
...
Client
...
Auth
  Basic = true
  ...
  Kerberos = true
  ...
...
Service
...
AllowUnencrypted = false
...
DefaultPorts
  HTTP = 5985
  HTTPS = 5986
...
AllowRemoteAccess = true
Winrs
  AllowRemoteShellAccess = true
...
```

11. In the Service section, if the parameter **AllowRemoteAccess** is set to *false*, execute the following command:

NOTE: This setting does not appear for all versions of Windows. If this setting does not appear, no action is required.

```
Set-Item WSMAN:\localhost\Service\AllowRemoteAccess -value true
```

12. In the Winrs section, if the parameter **AllowRemoteShellAccess** is set to *false*, execute the following command:

```
Set-Item WSMAN:\localhost\Winrs\AllowRemoteShellAccess -value true
```

13. If you are configuring this Windows server for unencrypted communication and the parameter **AllowUnencrypted** (in the Service section) is set to *false*, execute the following command:

```
Set-Item WSMAN:\localhost\Service\AllowUnencrypted -value true
```

14. If you are configuring this Windows server for unencrypted communication, verify that "HTTP = 5985" appears in the DefaultPorts section.

NOTE: ScienceLogic recommends using encrypted communication, particularly if you are also using an Active Directory account. Using an Active Directory account for encrypted authentication enables you to use Kerberos ticketing for authentication.

15. If you are configuring this Windows server for encrypted communication, verify that "HTTPS = 5986" appears in the DefaultPorts section.
16. If you are using an Active Directory account to communicate with this Windows server and in the Auth section, the parameter **Kerberos** is set to *false*, execute the following command:

```
Set-Item WSMAN:\localhost\Service\Auth\Kerberos -value true
```

NOTE: ScienceLogic recommends using an Active Directory account.

17. If you are using a local account to communicate with this Windows server and in the Auth section, the parameter **Basic** is set to *false*, execute the following command:

```
Set-Item WSMAN:\localhost\Service\Auth\Basic -value true
```

Option 3: Using a Group Policy to Configure Windows Remote Management

You can use a group policy object (GPO) to configure the following Windows Remote Management settings on Windows Server 2012 or Windows Server 2016:


- A registry key to enable Local Account access to Windows Remote Management
- Firewall rules
- Certificates
- HTTP and HTTPS listeners, including authentication and encryption settings
- Service start and recovery settings

To create the group policy object, perform the following steps:

1. Log in to the server as an administrator.
2. Right-click on the PowerShell icon in the taskbar and select *Run as Administrator*.
3. At the PowerShell prompt, use the change directory (CD) command to navigate to a folder where you can create new files.

- Save the root Certification Authority certificate to the local directory by executing the following command:

```
certutil.exe -ca.cert ca_name.cer
```

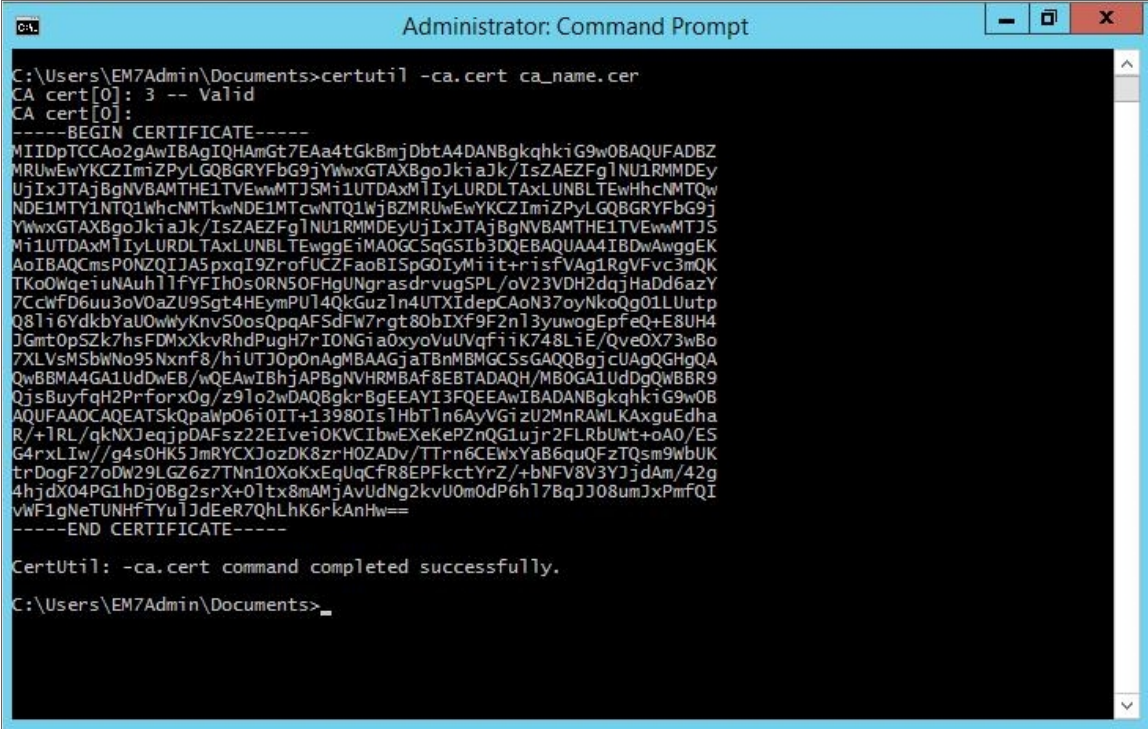

```
Administrator: Command Prompt
C:\Users\EM7Admin\Documents>certutil -ca.cert ca_name.cer
CA cert[0]: 3 -- Valid
CA cert[0]:
-----BEGIN CERTIFICATE-----
MIIIDpTCCAo2gAwIBAgIQHAmGt7EAa4tGkBmjDbtA4DANBgkqhkiG9w0BAQUFADBZ
MRUwEwYKZCIm1ZPyLQQBGRYFbG9jYWwxGTAXBgoJkiaJk/IsZAEZFglNU1RMMDEy
UjIxJTAjBgNVBAMTHE1TVwMTJSMTJ5LURDLTAxLUNBLTEwHhcnMTQw
NDE1MTY1NTQ1WkcNMtKwNDE1MTcwNTQ1WjBZMRUwEwYKZCIm1ZPyLQQBGRYFbG9j
YWwxGTAXBgoJkiaJk/IsZAEZFglNU1RMMDEyUjIxJTAjBgNVBAMTHE1TVwMTJS
MTJ5LURDLTAxLUNBLTEwHhcnMTQwNDE1MTcwNTQ1WjBZMRUwEwYKZCIm1ZPyL
AoIBAQMsP0NZQIJAJ5pxqI9ZrOfUCZFaoBISpG0IyMit+r1sfVAg1RgVFvc3mQK
TKo0WqeiuNAuh1lFYFih0s0RN50FHgUNgrasdrvugSPL/ov23VDH2dqjHaDd6azY
7CwfD6uu3oV0aZU9Sgt4HEymPUT4QkGuz1n4UTXiDepCAoN37oyNkoQg01LUutp
Q8li6YdkbYaU0wWyKnvS0osQpqAF5dFW7rgt80bIXF9F2n13yuwogEpfEQ+E8UH4
JGmt0pSZk7hsFDMxXkvRhdPugh7rIONGi a0xyoVuUvqfi iK748LiE/Qve0X73wBo
7XLVsMSbWNo95NxnF8/hlUTJOp0nAgMBAAGjaTBnMBMGCSsGAQQBgjcUAgQHhGQA
QwBBMA4GA1UdDwEB/wQEAwIBhjAPBgNVHRMBAF8EBTADAQH/MB0GA1UdDgQWBBr9
QjsBuyfQh2PrForx0g/z91o2wDAQBgkrBgEEAYI3FQEEAwIBADANBgkqhkiG9w0B
AQUFAAQAQEATSKQpawp06i0IT+13980Is1HbT1n6AyVGizU2MnRAWLKAxguEdha
R/+1RL/gkNXJegjpdAFsz22EIveiOKVCIbwEXeKePZnQG1ujr2FLRbUWt+oAO/ES
G4rxLIw//g4s0HK5JmRYCXJozDK8zrHOZADV/TTTrn6CEwxYaB6quQFzTQsm9wBUK
trDogF27oDw29LGZ6z7TNn10XoKxUqCfR8EPFkctYrZ/+bNFV8V3YjdAm/42g
4hjdX04PG1hDj0Bg2srX+01tx8mAmjAvUdNg2kvU0m0dP6h17BqJJ08umJxPmfQI
vWF1gNeTUNHFYU1JdEeR7QhLhK6rkAnHw==
-----END CERTIFICATE-----


CertUtil: -ca.cert command completed successfully.

C:\Users\EM7Admin\Documents>_
```


TIP: You will import this certificate into the new group policy in step 21.

- Exit the command prompt.
- Log in to a domain controller in your Active Directory forest and navigate to the System Manager dashboard.


- Click the **Tools** menu, then select *Group Policy Management*.

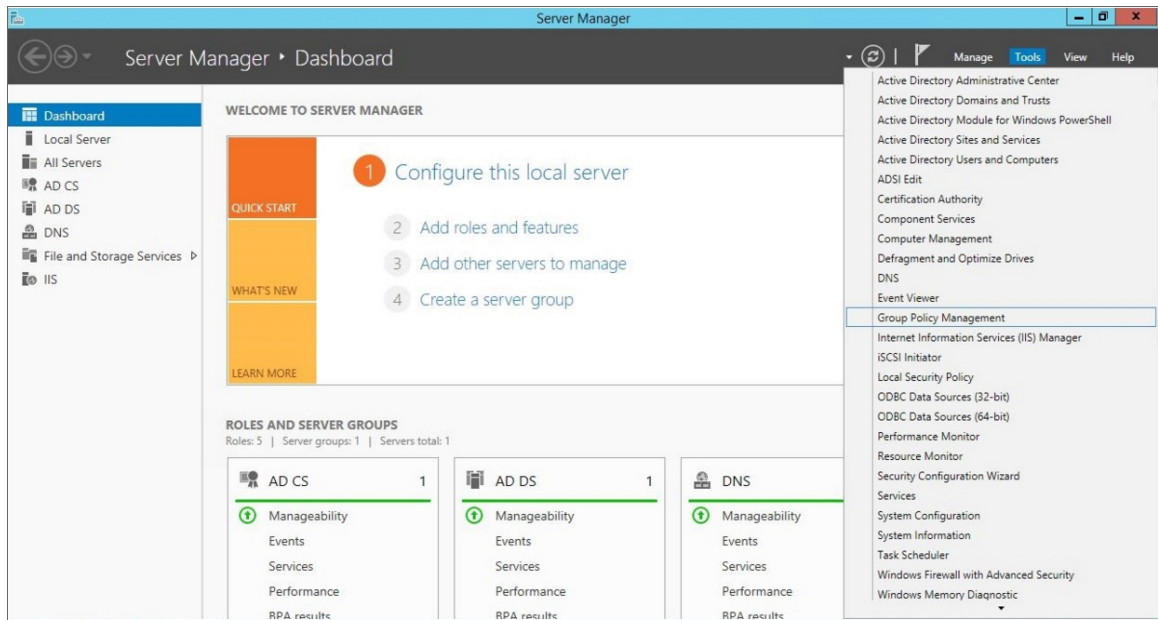


- On the **Group Policy Management** page, in the left panel, right-click the domain name where you want the new group policy to reside and then select *Create a GPO in this domain and Link it here*.

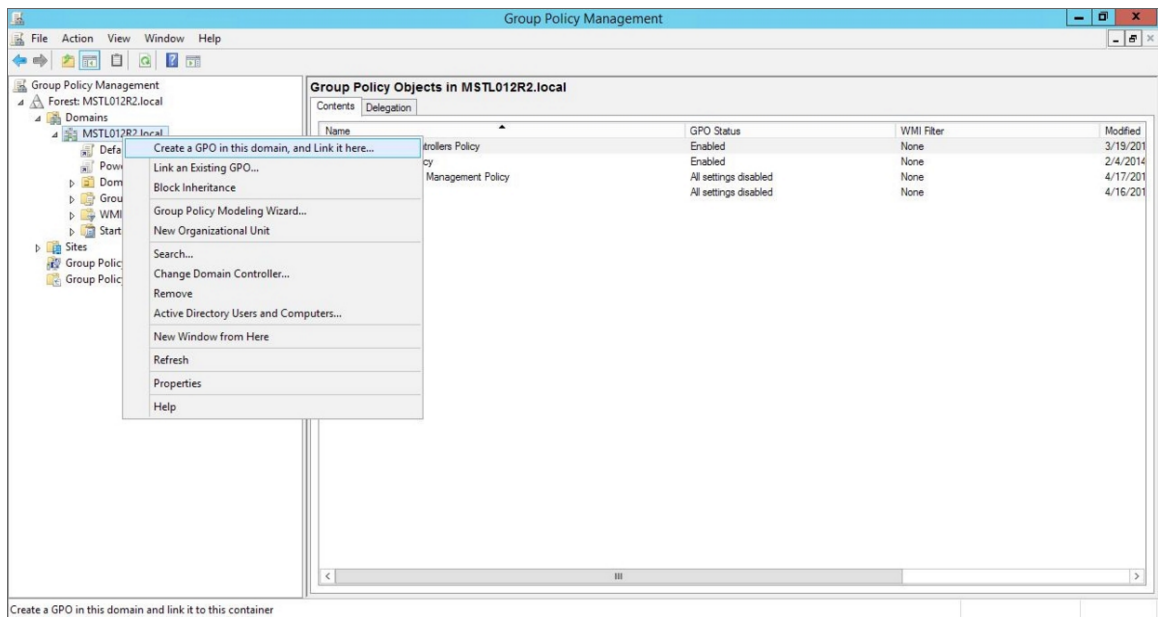


- In the left panel, right-click the new group policy and select *Edit*. The **Group Policy Management Editor** page for the new Windows Remote Management group policy appears.

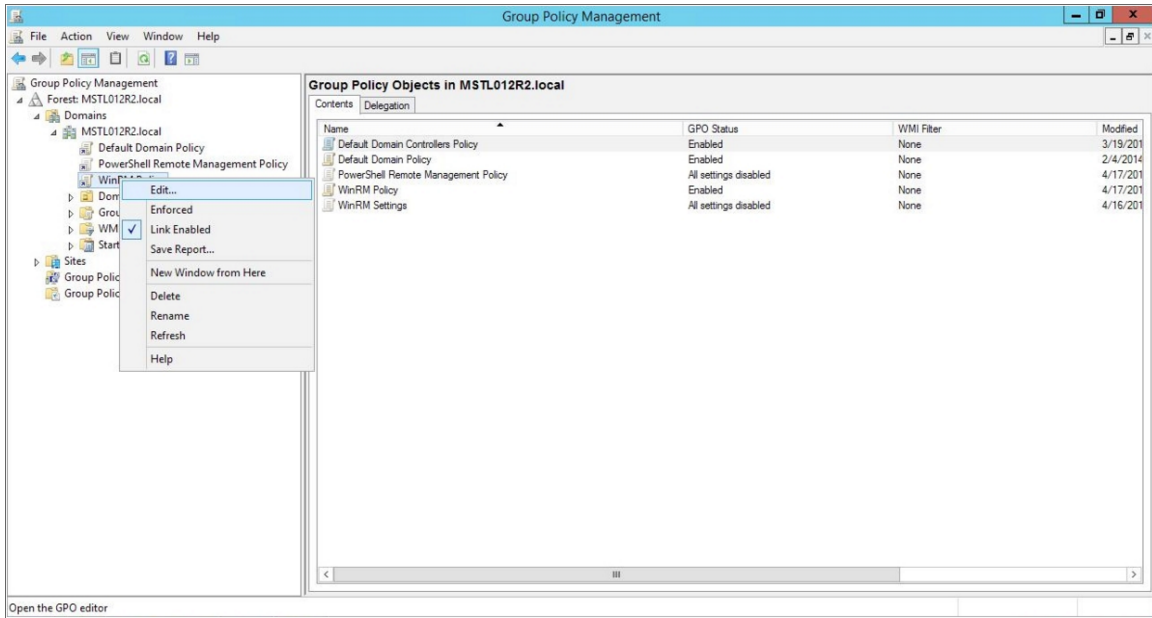


- In the left panel, navigate to **Computer Configuration > Policies > Windows Settings > Security Settings > System Services**. In the right panel, locate the **Windows Remote Management (WS-Management)** service. Right-click the service, then select *Properties*.

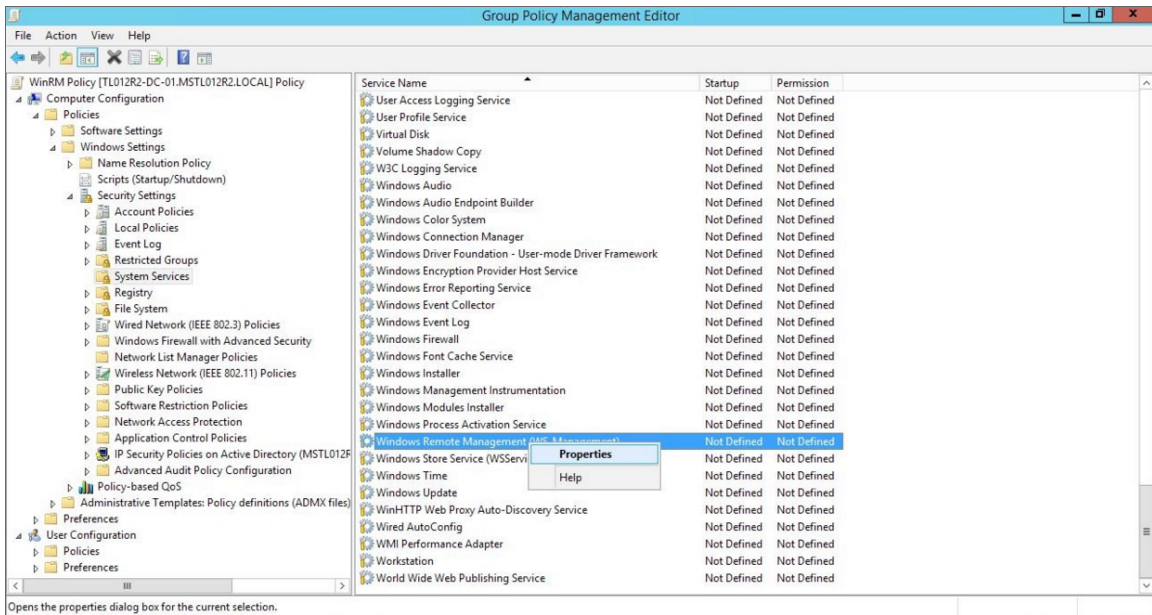


- The **Windows Remote Management (WS-Management)** modal page appears. Select the **Define this policy setting** check box and the **Automatic** radio button, then click **[OK]**.

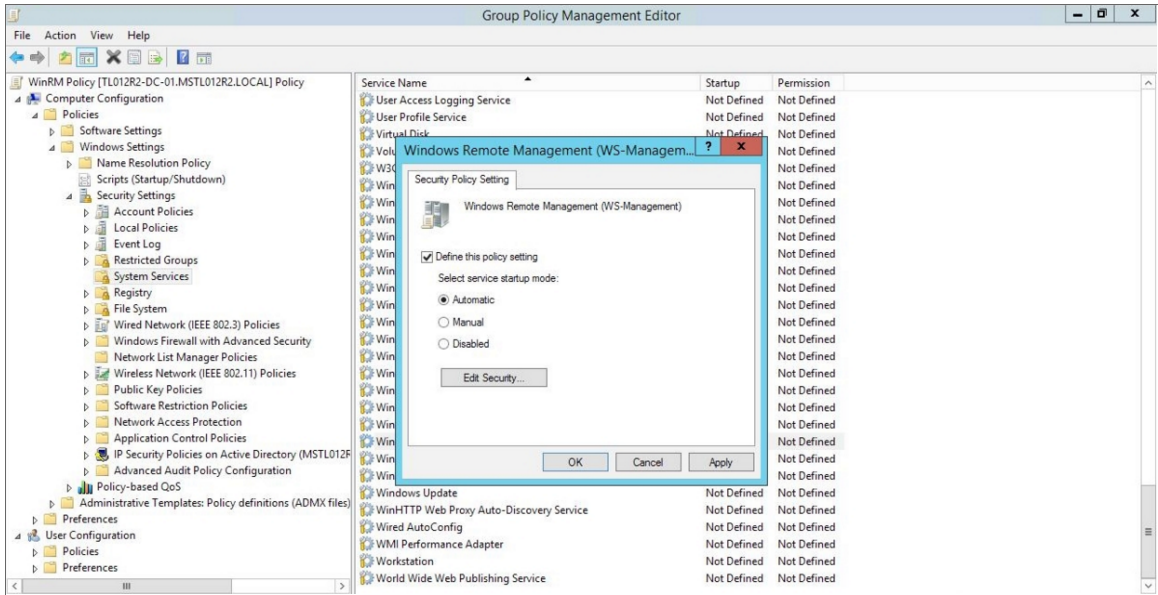


- In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Windows Settings > Security Settings > Windows Firewall with Advanced Security > Windows Firewall with Advanced Security - LDAP > Inbound Rules**. In the right panel, right-click and select **New Rule**.

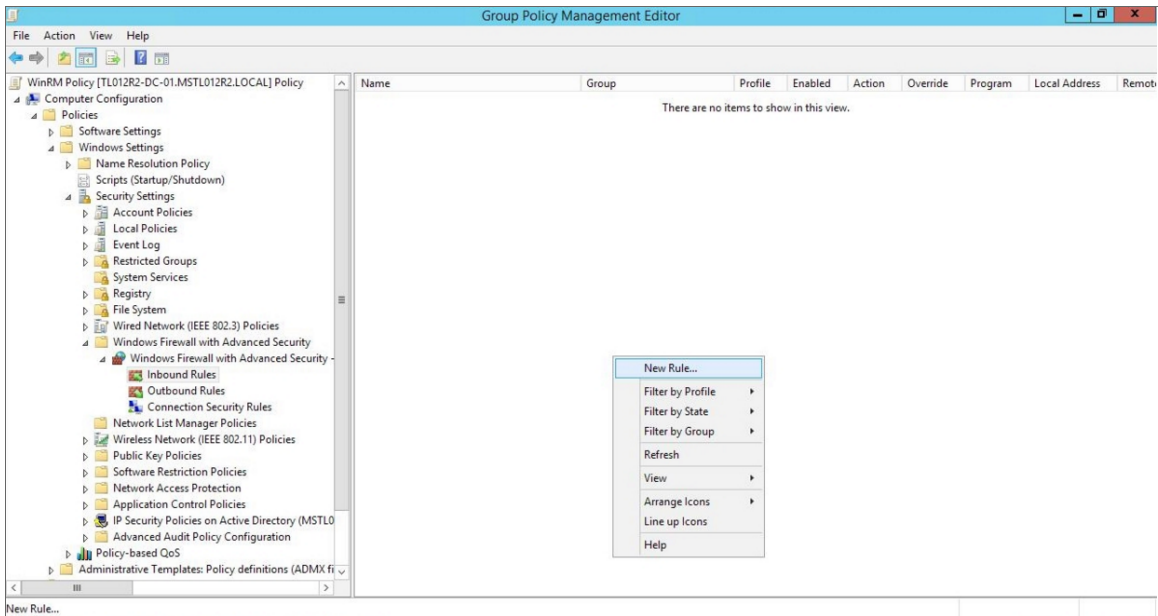


- The **New Inbound Rule Wizard** modal page appears. Click the **Predefined** radio button, select *Windows Firewall Remote Management* from the list, and then click **[Next]**.

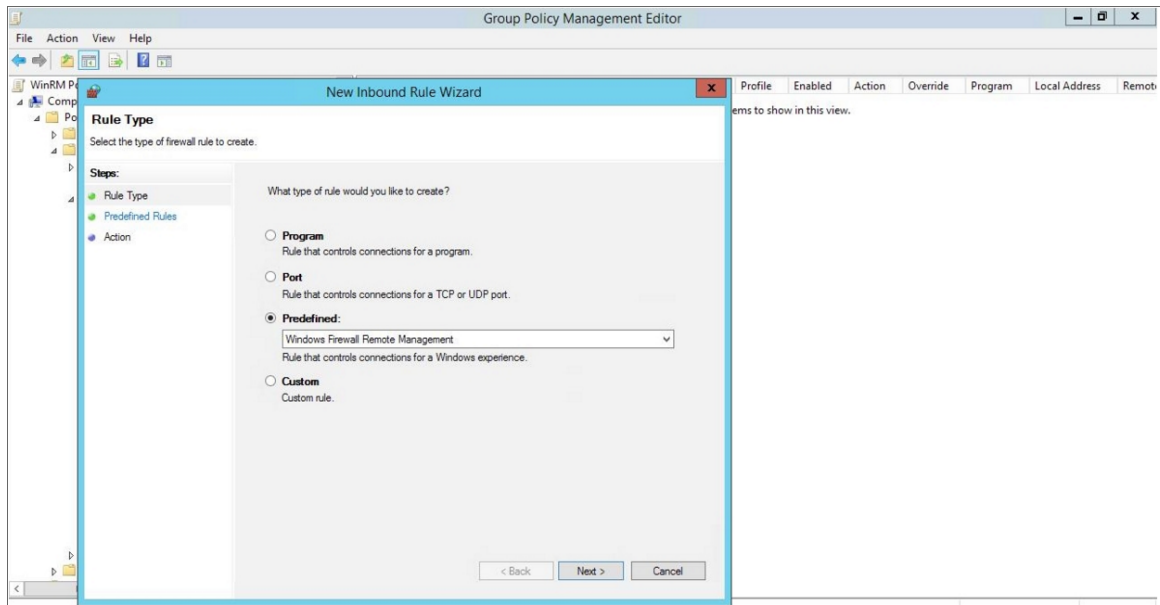


- Select the *Windows Firewall Remote Management (RPC)* and *Windows Firewall Remote Management (RPC-EPMAP)* check boxes, then click **[Next]**.

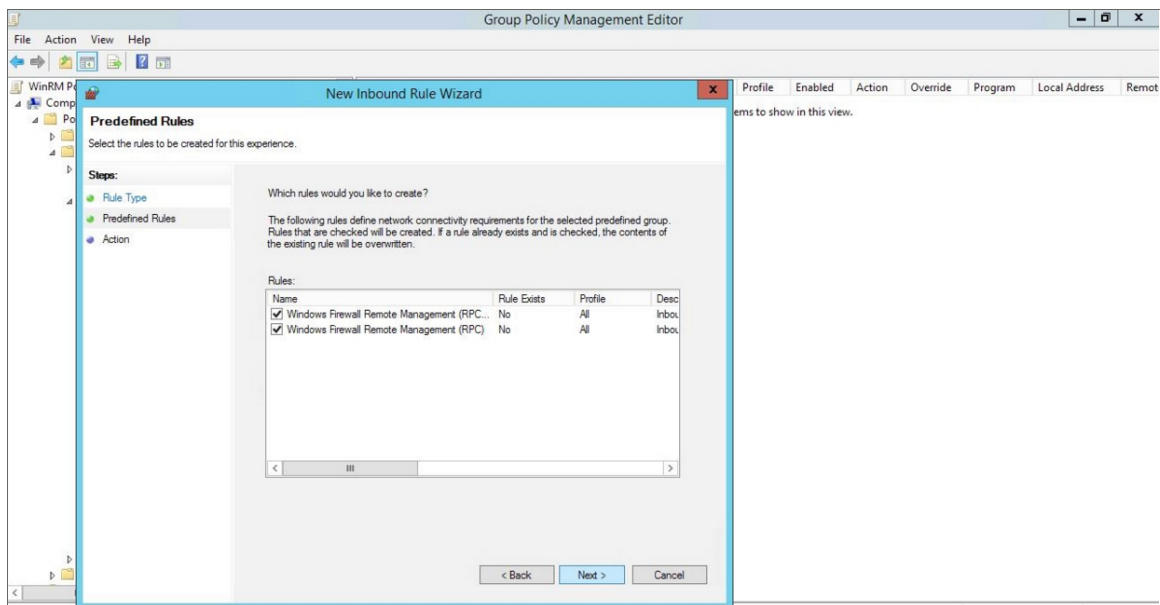


15. Select the *Allow the connection* radio button, then click **[Finish]**.

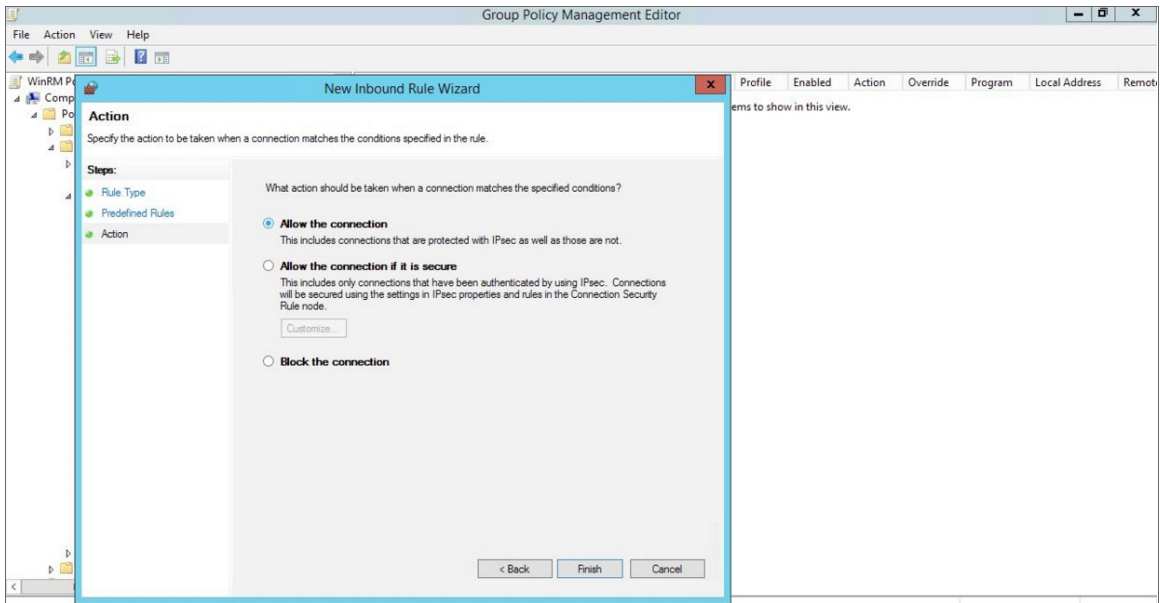


16. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Windows Settings > Security Settings > Public Key Policies > Automatic Certificate Request Settings**. In the right panel, right-click and select **New > Automatic Certificate Request**.

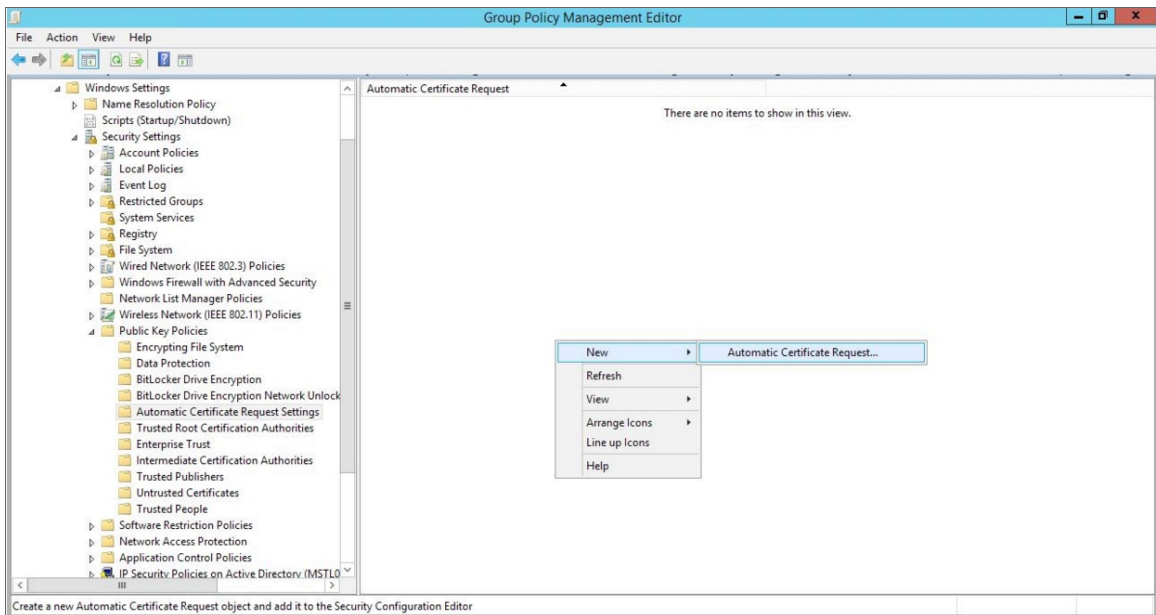


17. The **Automatic Certificate Request Setup Wizard** modal page appears. Click **[Next]**.

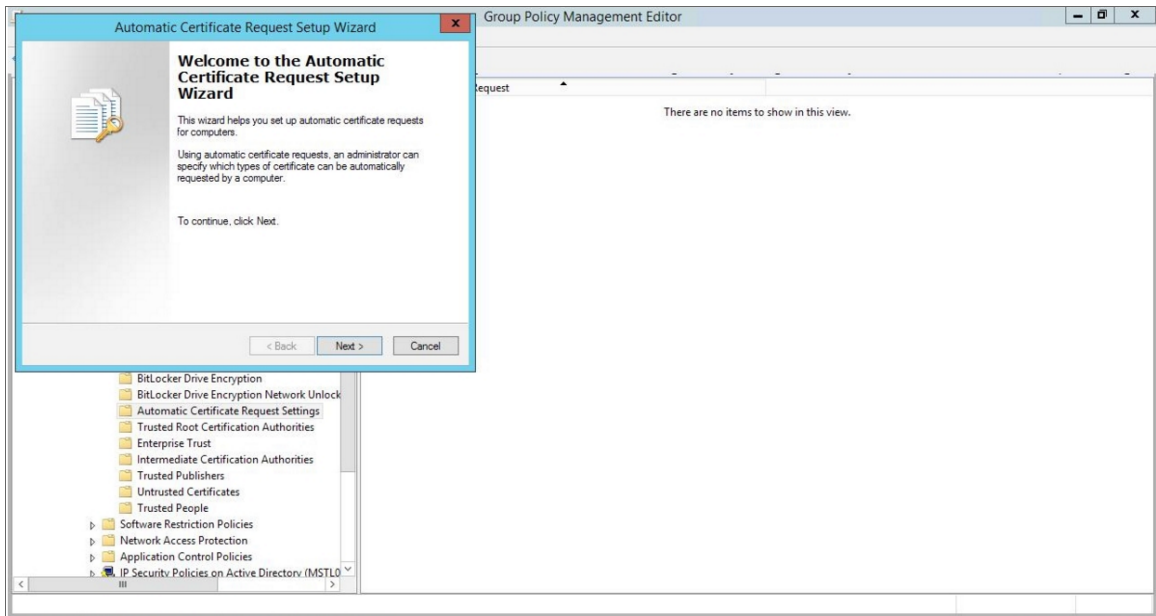


18. Select the *Computer* certificate template. Click **[Next]**, and then click **[Finish]**.

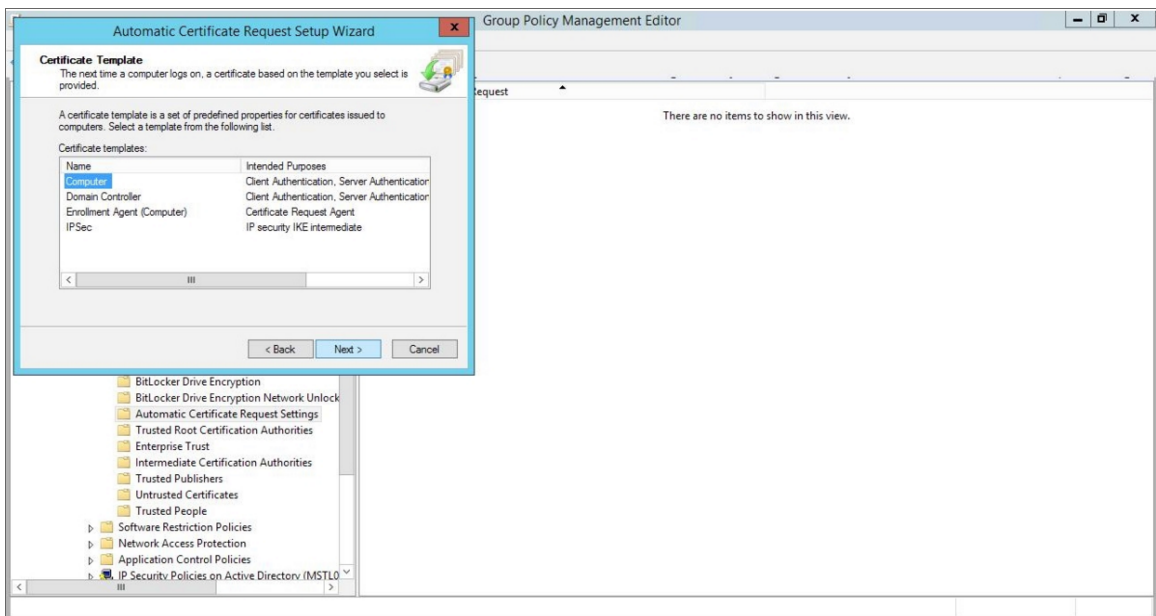


19. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Windows Settings > Security Settings > Public Key Policies > Trusted Root Certification Authorities**. In the right panel, right-click and select **Import**.

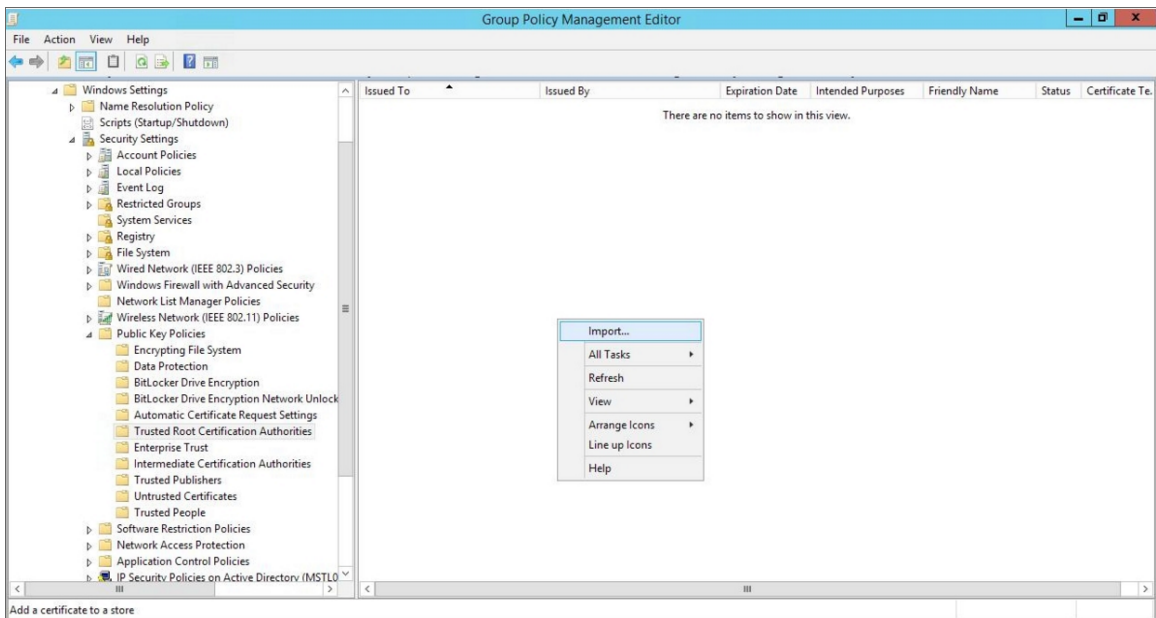


20. The **Certificate Import Wizard** modal page appears. Click **[Next]**.

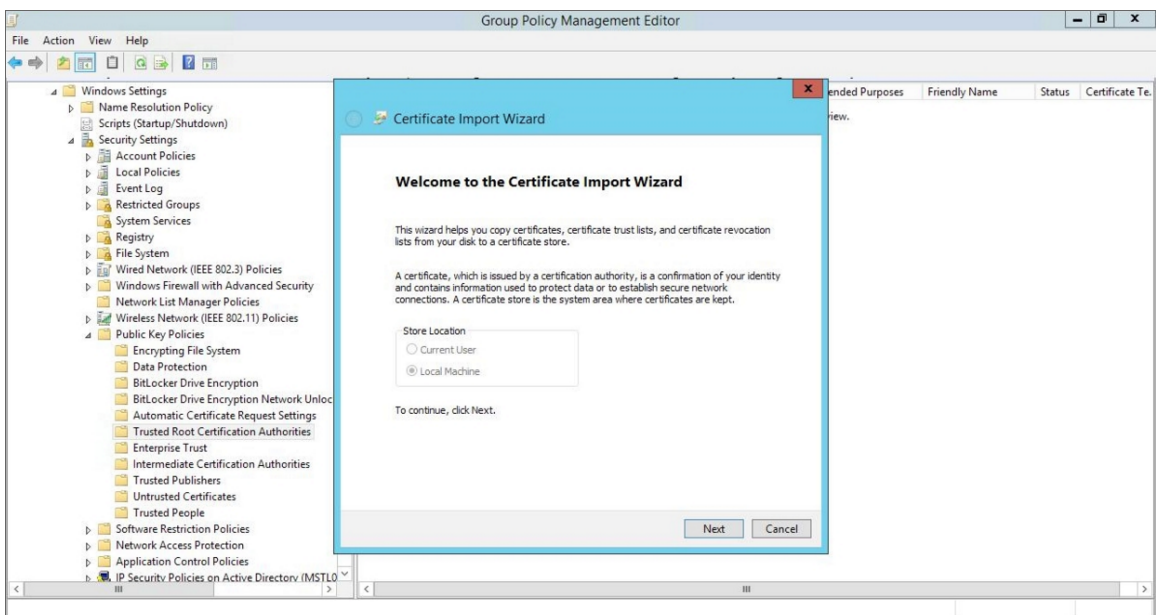


21. Browse to the Certification Authority certificate that you saved to your local directory in step 4, then click [Next].

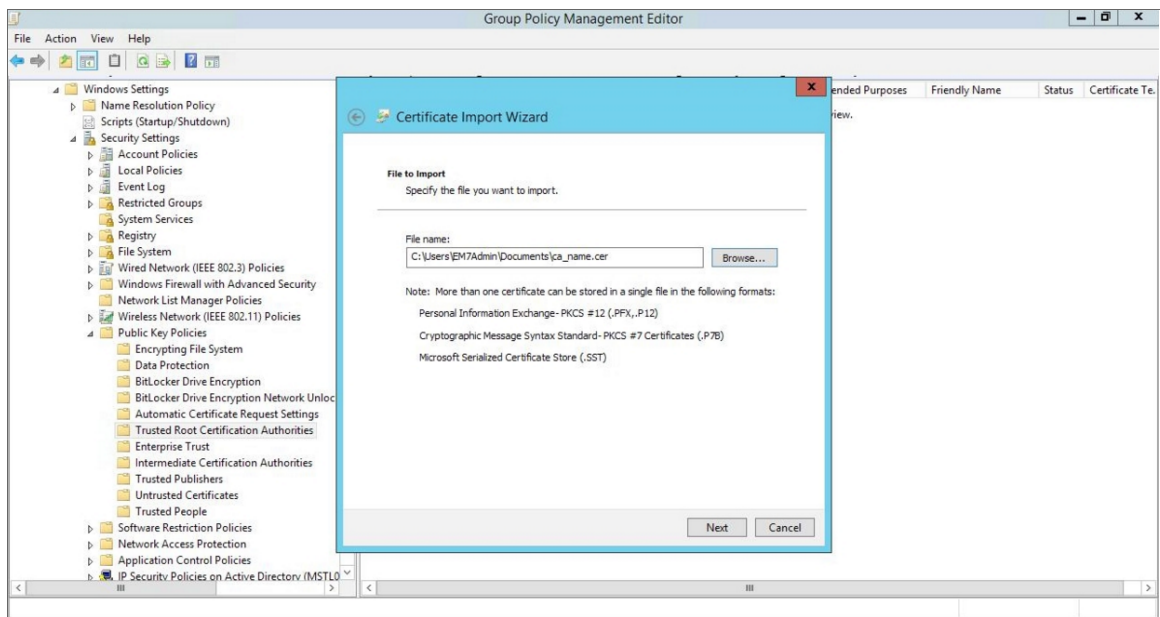


22. Select the **Place all certificates in the following store** radio button, then select the *Trusted Root Certification Authorities* certificate store and click [Next].

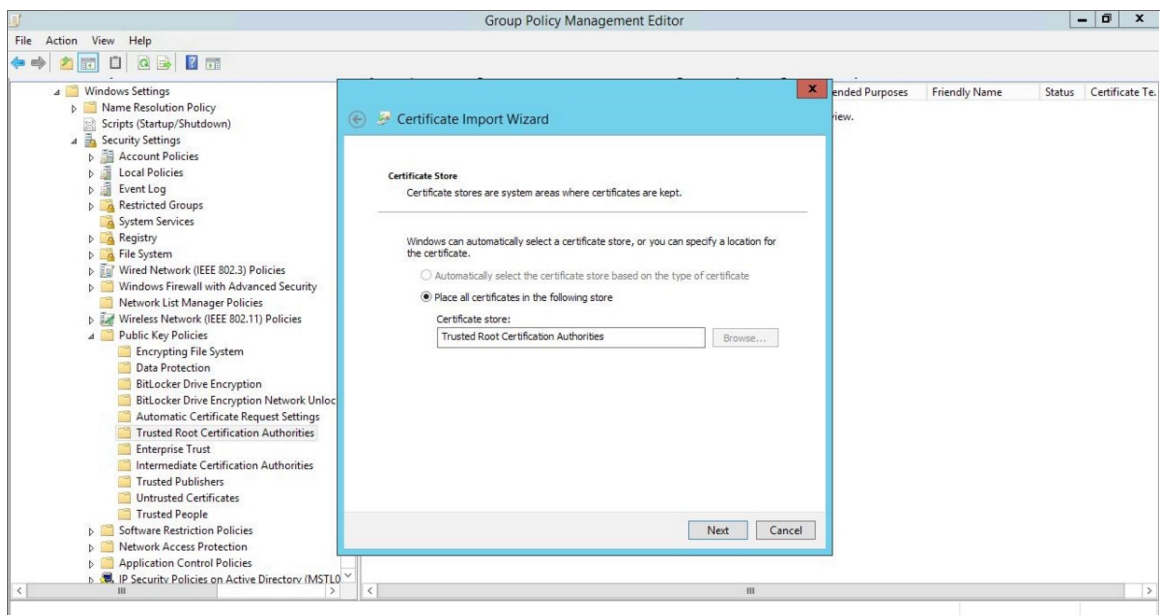

- Click **[OK]** to confirm that the certificate was successfully imported, and then click **[Finish]**.

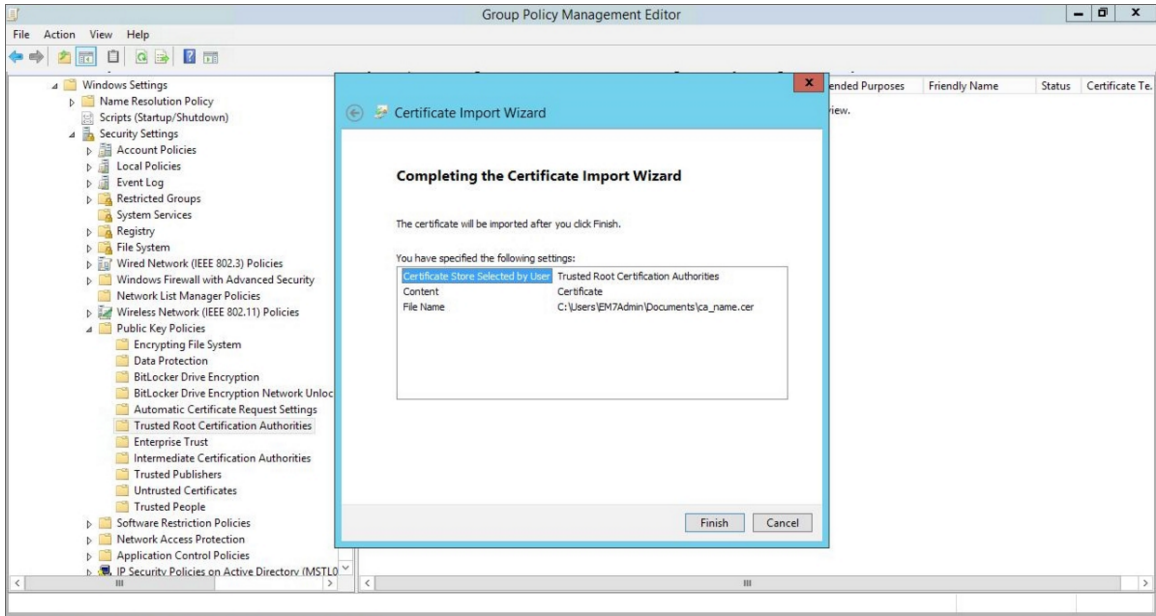


- In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Administrative Templates > Network > Network Connections > Windows Firewall > Domain Profile**. In the right panel, right-click **Windows Firewall: Define inbound port exceptions** and select **Edit**.

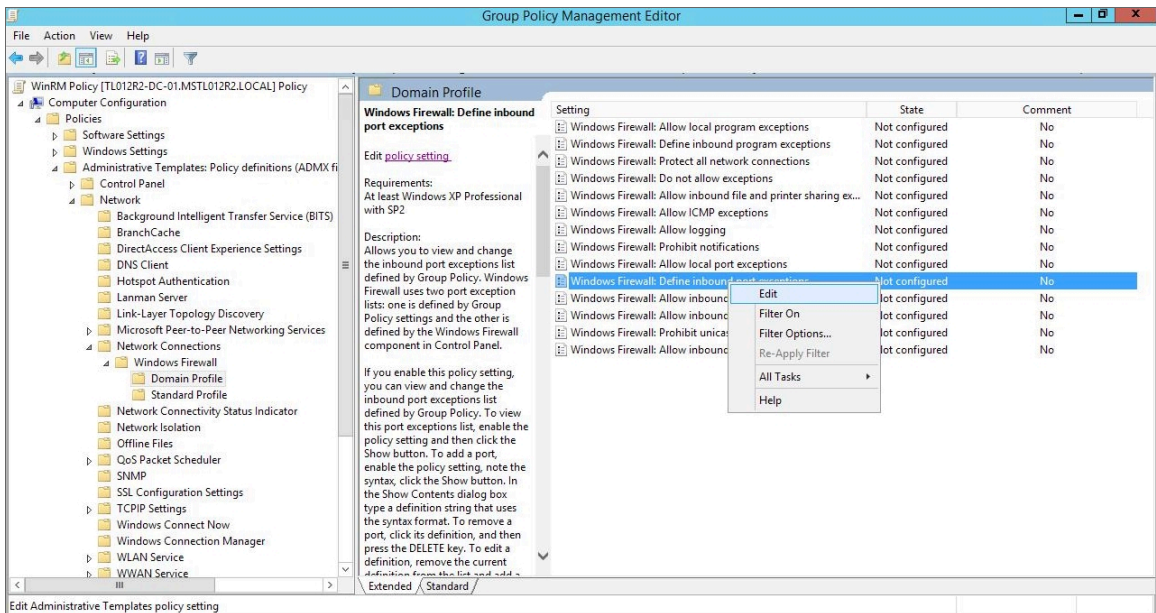

- The **Windows Firewall: Define inbound port exceptions** modal page appears. Under **Options**, click **[Show]**.


26. The **Show Contents** modal page appears. Enter the following values:

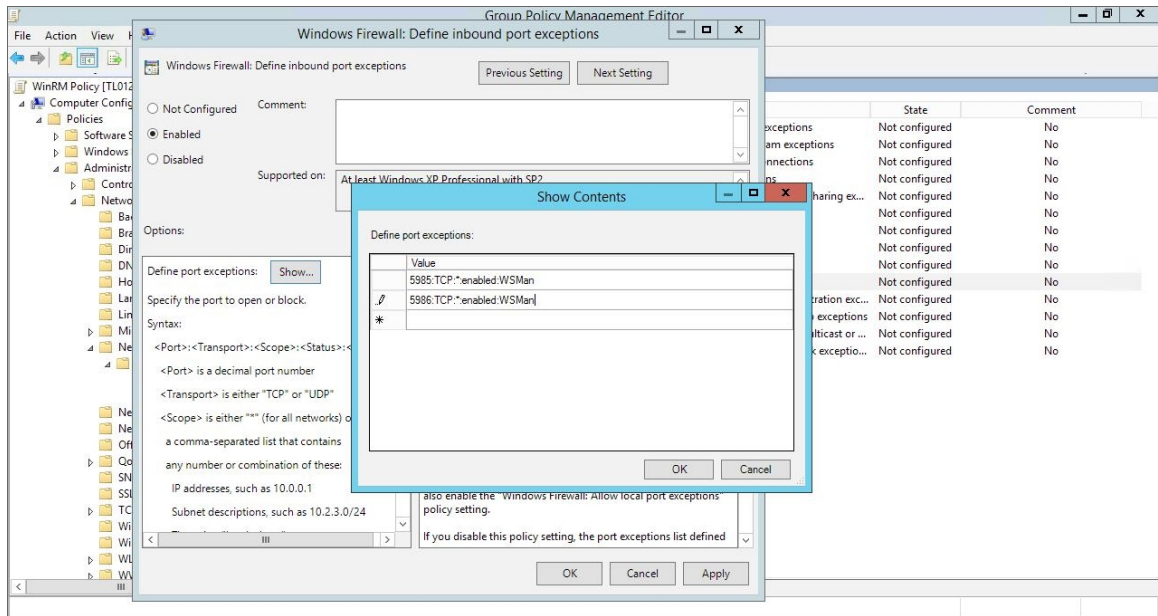


- 5985:TCP:*:enabled:WSMan
- 5986:TCP:*:enabled:WSMan

27. Click **[OK]**, then click **[OK]** again.


28. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Administrative Templates > Windows Components > Windows Remote Management (WinRM) > WinRM Client**. In the right panel, double-click the **Allow Basic authentication** setting.

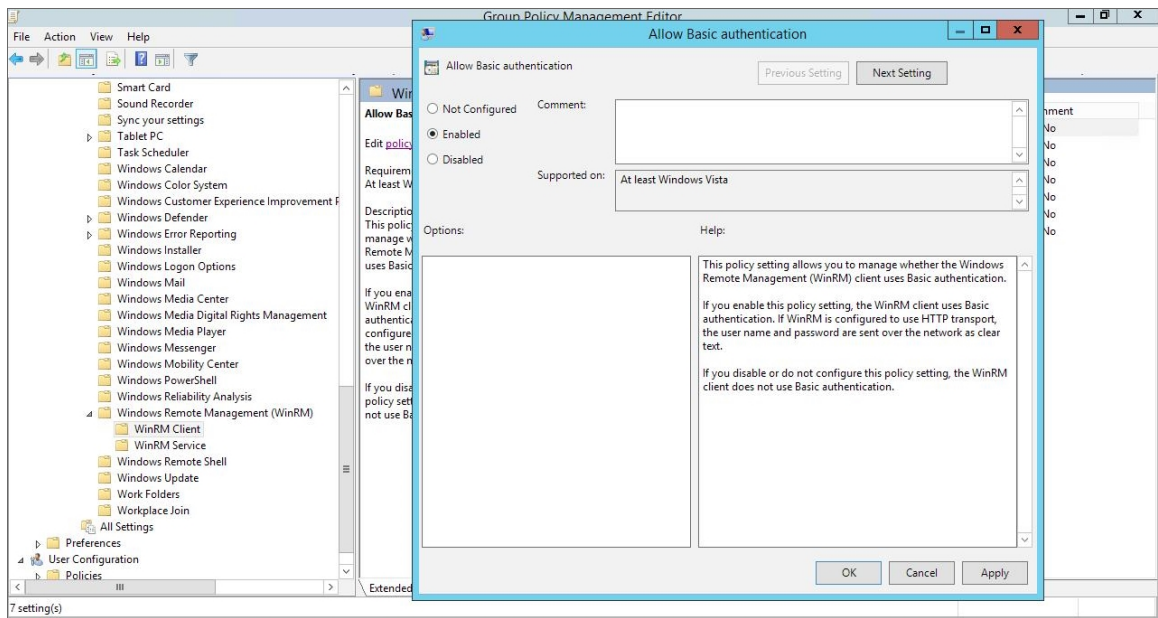


29. Select the **Enabled** radio button, then click [OK].
30. Repeat steps 28 and 29 for the **Allow unencrypted traffic** setting.
31. Double-click the **Trusted Hosts** setting. Select the **Enabled** radio button, enter an asterisk (*) in the **TrustedHostsList** field (under **Options**), and then click [OK].

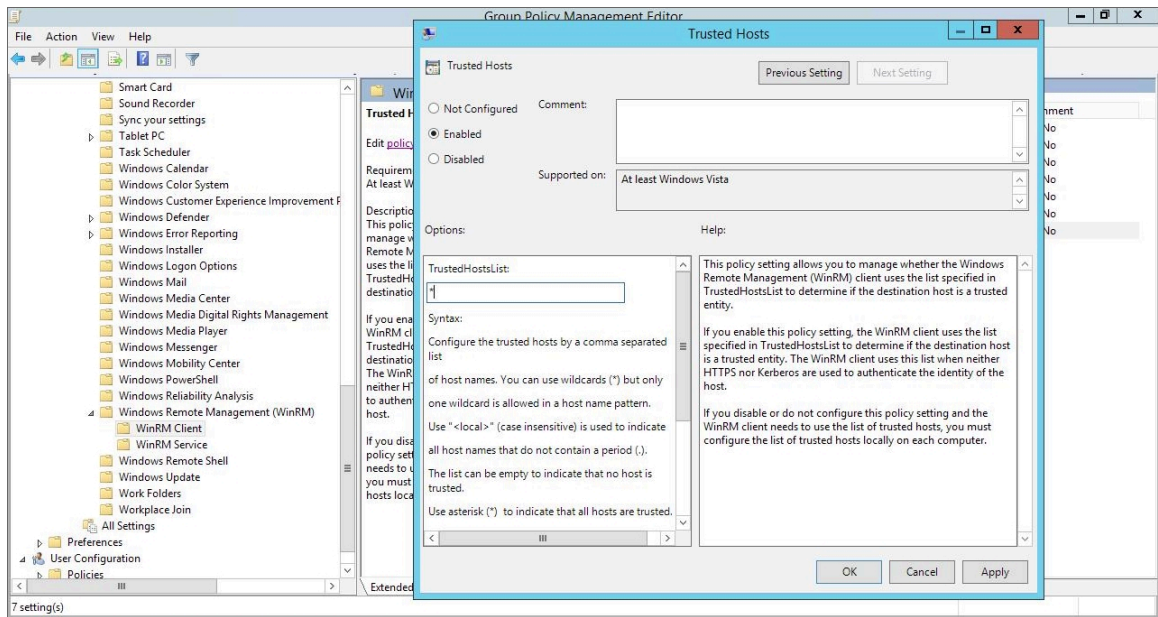


32. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Policies > Administrative Templates > Windows Components > Windows Remote Management (WinRM) > WinRM Service**. In the right panel, double-click the **Allow Basic authentication** setting.

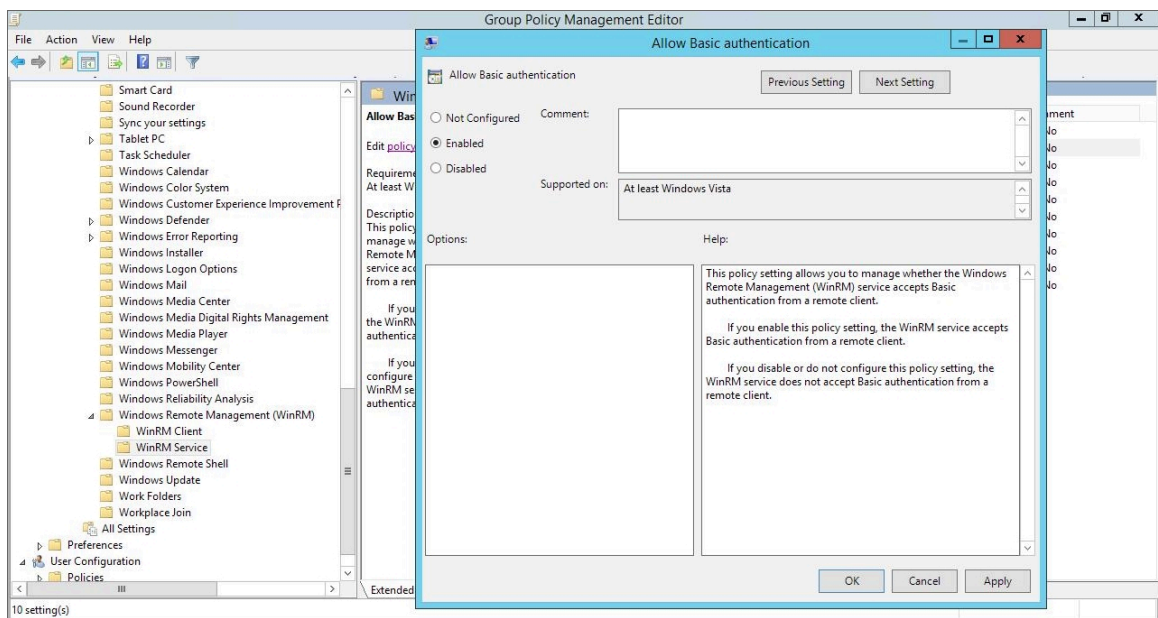


33. Select the **Enabled** radio button, then click [OK].
34. Repeat steps 32 and 33 for the **Allow unencrypted traffic** setting.
35. Double-click the **Allow remote server management through WinRM** setting. Select the **Enabled** radio button, enter an asterisk (*) in the **Pv4 filter** and **Pv6 filter** fields (under **Options**), and then click [OK].

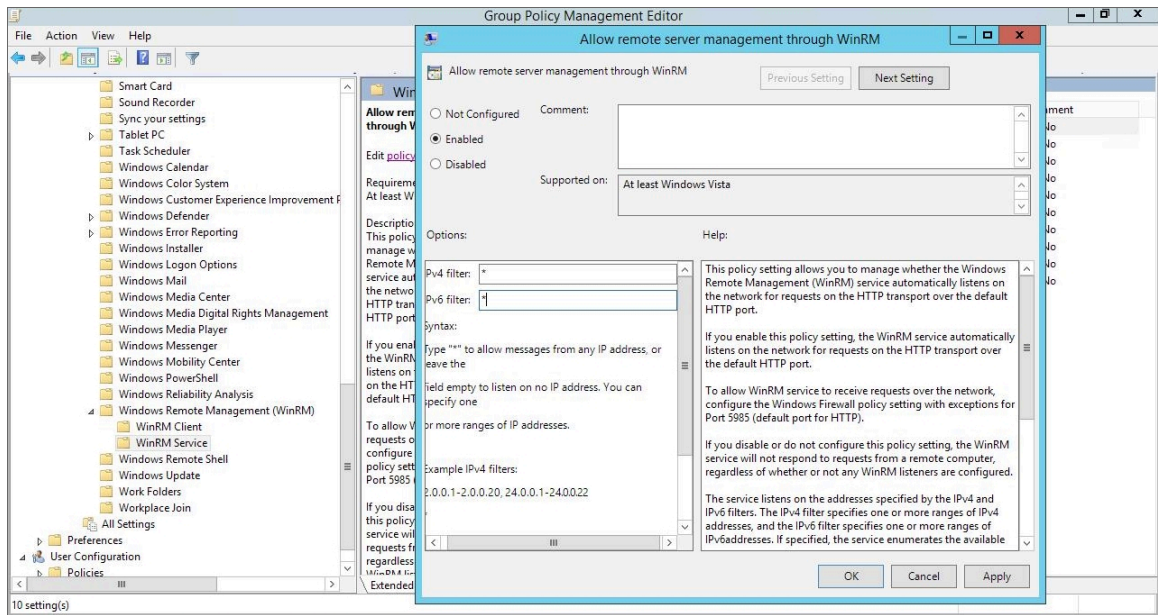

36. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Preferences > Windows Settings > Registry**. In the right panel, right-click and select **New > Registry Item**.

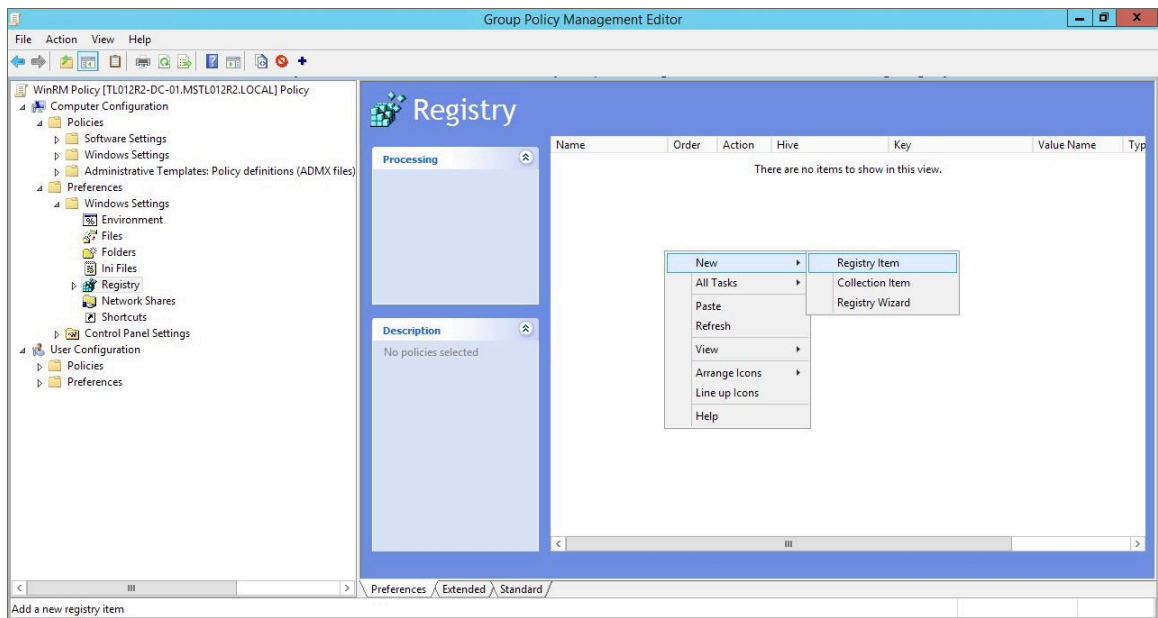

37. In the **New Registry Properties** modal page, edit the values in one or more of the following fields:

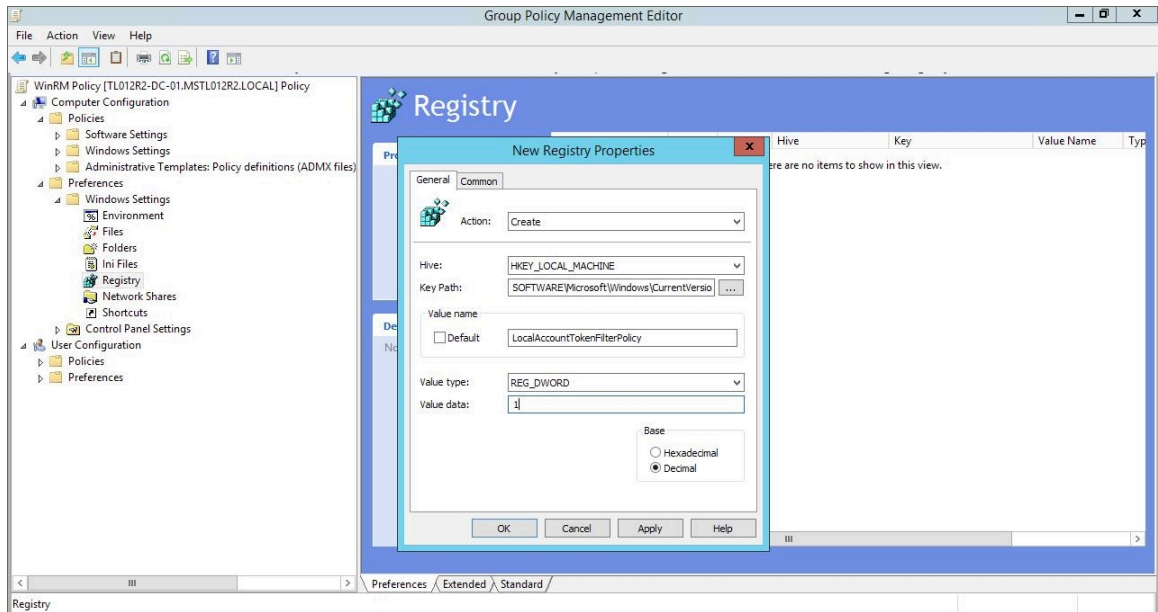


- **Action**. Select *Create*.
- **Hive**. Select *HKEY_LOCAL_MACHINE*.
- **Key Path**. Enter "SOFTWARE\Microsoft\Windows\CurrentVersion\policies\system".
- **Value name**. Enter "LocalAccountTokenFilterPolicy".
- **Value type**. Enter "REG_DWORD".
- **Value data**. Enter "1".
- **Base**. Select *Decimal*.

38. Click the [OK] button.


39. Repeat steps 36-38 to make an additional registry change to increase the maximum number of users who can access Windows Remote Management. In the **New Registry Properties** modal page, edit the following values:

- **Action**. Select *Create*.
- **Hive**. Select *HKEY_LOCAL_MACHINE*.
- **Key Path**. Enter "SOFTWARE\Policies\Microsoft\Windows\WinRM\Service\".
- **Value name**. Enter "WinRS!MaxConcurrentUsers".
- **Value type**. Enter "REG_DWORD".
- **Value data**. Enter "0x64 (100)".
- **Base**. Select *Decimal*.

40. In the left panel of the **Group Policy Management Editor** page, navigate to **Computer Configuration > Preferences > Control Panel Settings > Services**. In the right panel, right-click and select **New > Service**.

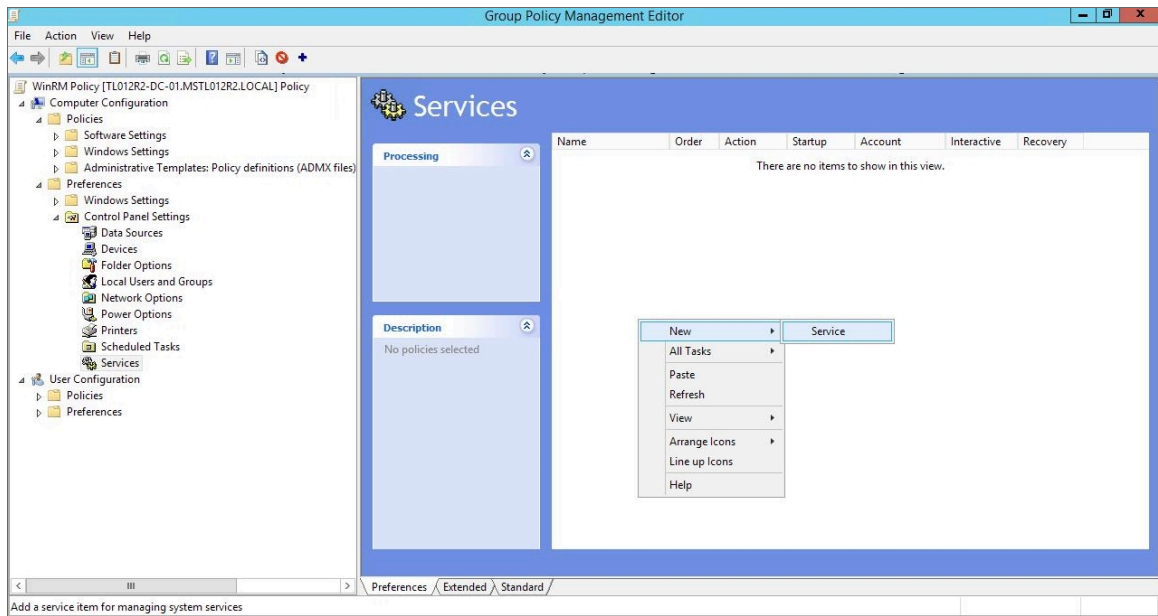


41. In the **New Service Properties** modal page, edit the values in one or more of the following fields:

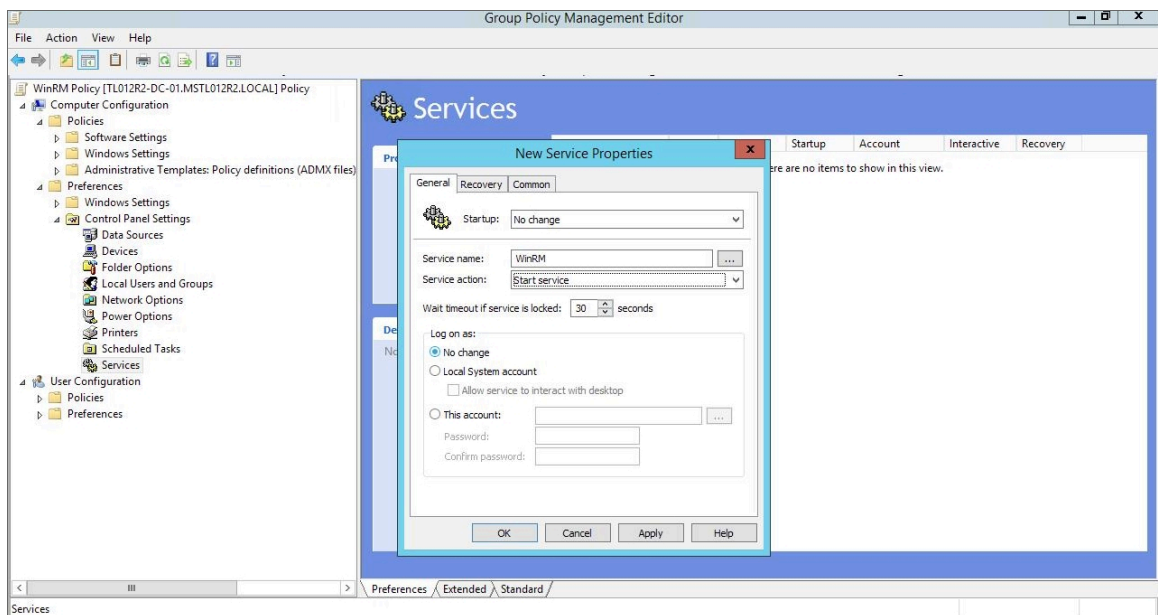

- **Startup.** Select *No change*.

- **Service name.** Enter "WinRM".
- **Service action.** Select *Start service*.
- **Wait timeout if service is locked.** Select 30 seconds.
- **Log on as.** Select *No change*.


42. Click the **[Recovery]** tab, then edit the values in one or more of the following fields:

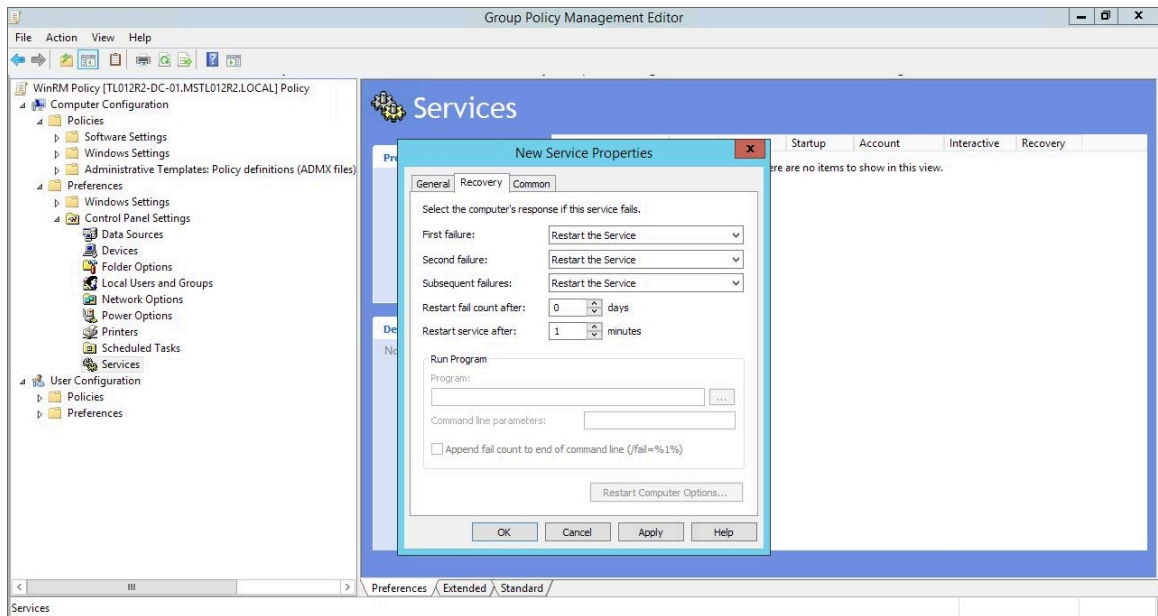


- **First failure.** Select *Restart the Service*.
- **Second failure.** Select *Restart the Service*.
- **Subsequent failures.** Select *Restart the Service*.
- **Restart fail count after.** Select 0 days.
- **Restart service after.** Select 1 minute.

43. Click the **[OK]** button.

44. To enforce your group policy, in the left panel of the **Group Policy Management Editor** page, navigate to **Forest > Domains > [your local domain] > PowerShell Remote Management Policy**. In the **PowerShell Remote Management Policy** panel on the right, right-click the local domain name under *The following sites, domains, and OUs are linked to this GPO* and select *Enforced*.

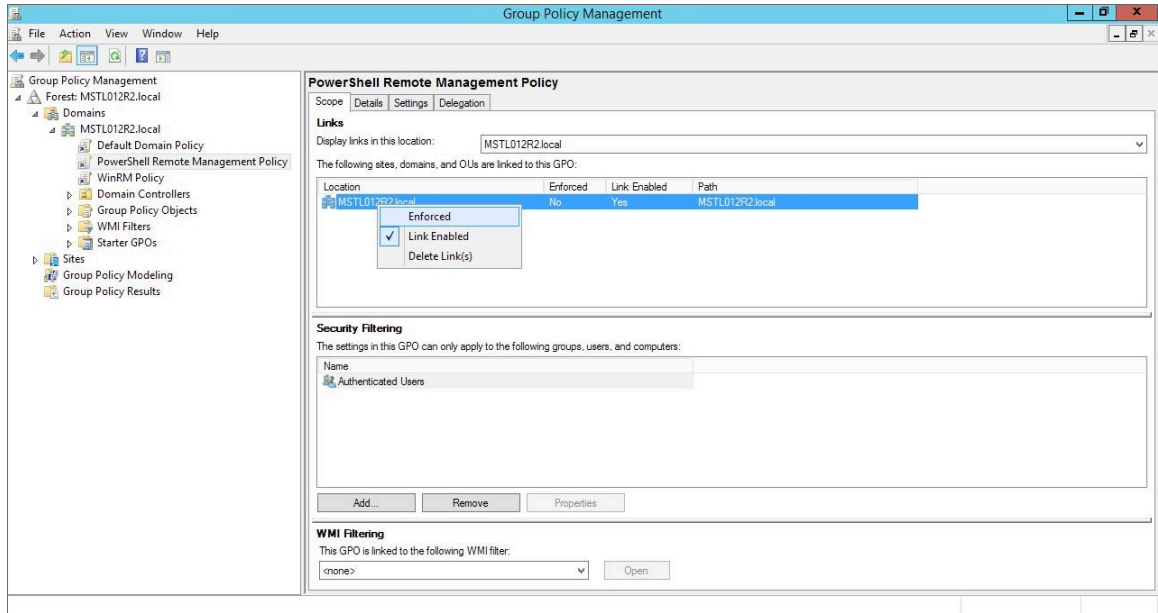

45. To enable your group policy, in the left panel of the **Group Policy Management Editor** page, navigate to **Forest > Domains > [your local domain] > Group Policy Objects > WinRM Policy**. Right-click **WinRM Policy**, then select *GPO Status > Enabled*.

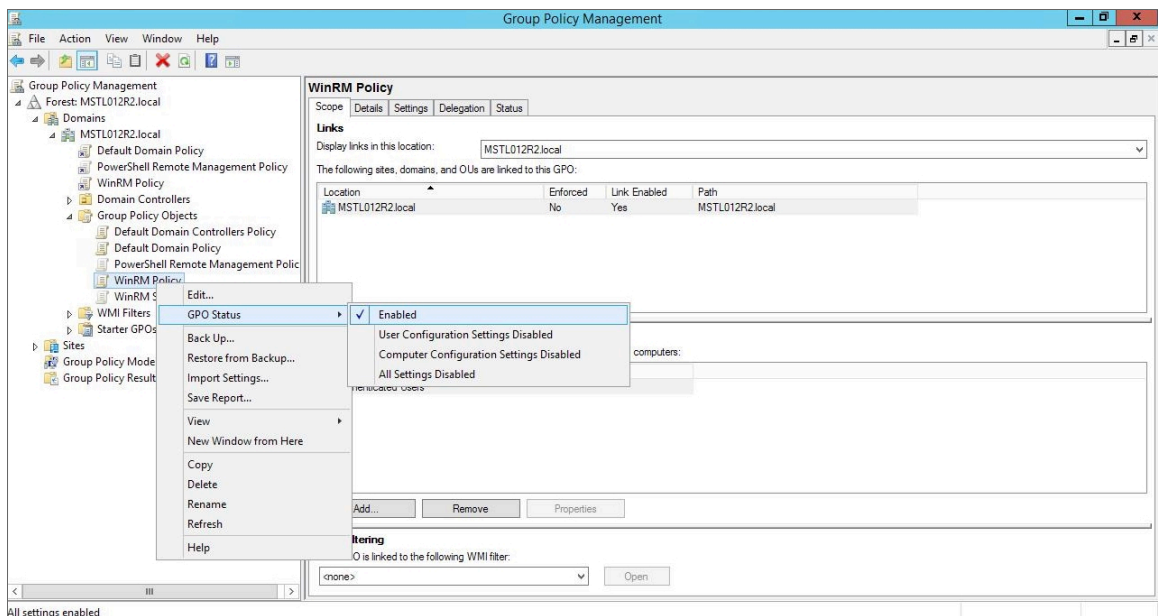

Step 4: Configuring a Windows Management Proxy

If SL1 cannot execute PowerShell requests directly on a Windows server, you can optionally configure an additional Windows server to act as a proxy for those PowerShell requests. To use a proxy, you must configure at least two Windows servers:

- A target server that SL1 cannot communicate with directly.
- A proxy server that SL1 will communicate with to execute PowerShell requests on the target server.

To configure the target and proxy servers, perform the following steps:

1. Configure a user account that SL1 will use to connect to the proxy server and the proxy server will use to connect to the target server. The user account can either be a local account or an Active Directory account; however, the user account must have the same credentials on the target and proxy servers and be in the Local Administrator's group on both servers.
2. If you have created a local user account on the Windows Server instead of an Active Directory account, you must configure encrypted communication between SL1 and the Windows server. To do this, you must [configure a Server Authentication certificate](#).
3. [Configure Windows Remote Management](#) on the target server and the proxy server.
4. Log in to the proxy server as an administrator.
5. Open the PowerShell command window.
6. Right-click on the PowerShell icon in the taskbar and select *Run as Administrator*.
7. Execute one of the following commands on the proxy server to allow the proxy server to trust one or more target servers:
 - To allow the proxy server to trust all servers (not recommended), execute the following command:

```
Set-Item WSMAN:\Localhost\Client\TrustedHosts -value *
```

- To allow the proxy server to trust only specific target servers, execute the following command, inserting a list that includes the IP address for each target server. Separate the list of IP addresses with commas.

```
Set-Item WSMAN:\Localhost\Client\TrustedHosts -value <comma-delimited-list-of-target-server-IPs>
```

8. Execute the following command on the proxy server to configure the LocalAccountTokenFilterPolicy:

```
New-ItemProperty  
"HKLM:\SOFTWARE\Microsoft\Windows\CurrentVersion\Policies\System" -Name  
"LocalAccountTokenFilterPolicy" -Value 1 -PropertyType "DWORD"
```

NOTE: If the proxy server is in a different Windows domain (domain A) than the target servers (domain B), and the proxy server uses a user account from Active Directory, and Active Directory is in the same Windows domain as the target servers (domain B), you must perform the following to allow the proxy server to send PowerShell commands to the target servers:

- On the domain controller for each domain (domain A and domain B), create new forward-lookup zones and reverse-lookup zones that allow name resolution to work between the two domains.
- On the domain controller for each domain (domain A and domain B), create a non-transitive realm trust between the two domains.
- Login to the proxy server and add the Active Directory account (from domain A) to the Local Administrator's group for the proxy server. You should be able to select the account on the proxy server after you create the non-transitive realm trust between the two domains.

Step 5: Increasing the Number of PowerShell Dynamic Applications That Can Run Simultaneously

You can optionally execute a series of commands that will allow SL1 to increase the default maximum number of PowerShell Dynamic Applications that can run simultaneously.

To do so:

1. Determine the number of Dynamic Applications that will be used to monitor the Windows server. Multiply this number by three.
2. Open a PowerShell command prompt. Log in as an Administrator.
3. At the prompt, execute the following commands:

```
Set-Item WSMAN:\Localhost\Shell\MaxShellsPerUser -value <number you  
calculated in step 1>
```

```
Set-Item WSMAN:\Localhost\Service\MaxConcurrentOperationsPerUser -value  
<number you calculated in step 1>
```

```
Restart-Service WinRM
```

4. Repeat these steps on each Windows server that will be monitored by SL1.


Creating a PowerShell Credential

If you configure your Windows system to respond to PowerShell requests from SL1, you can use PowerShell Dynamic Applications to collect information from your Windows system.

All of the PowerShell Dynamic Applications include a discovery object. If you include a credential for PowerShell Dynamic Applications in the discovery session that includes your Windows system, SL1 will automatically align the appropriate PowerShell Dynamic Applications to the Windows system. For more information about creating a discovery session, see the **Discovery & Credentials** manual.

To define a PowerShell credential in SL1:

1. Collect the information you need to create the credential:
 - The username and password for a user on the Windows device.
 - If the user is an Active Directory account, the hostname or IP address of the Active Directory server and the domain.
 - Whether an encrypted connection should be used.
 - If you are using a Windows Management Proxy, the hostname or IP address of the proxy server.
2. Go to the **Credential Management** page (System > Manage > Credentials).
3. In the **Credential Management** page, click the **[Actions]** menu. Select **Create PowerShell Credential**.

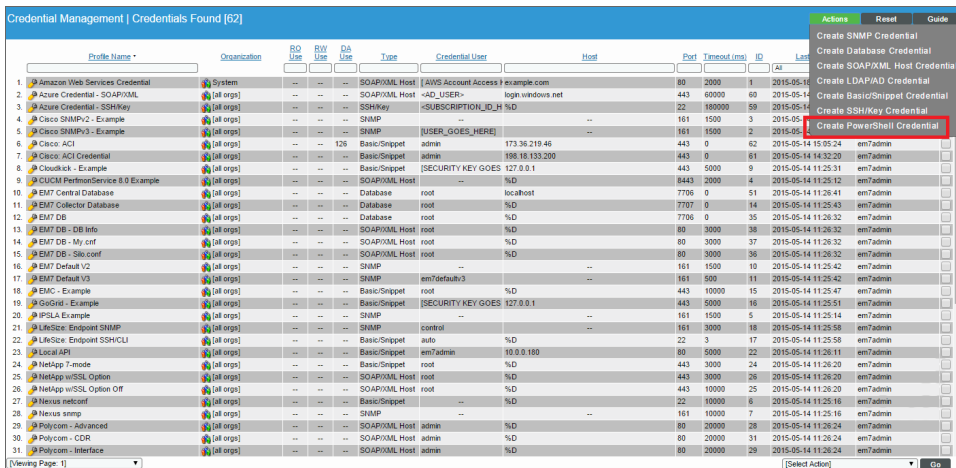

4. The **Credential Editor** page appears, where you can define the following fields:

The screenshot shows the 'Credential Editor' window with the following fields and values:

- Profile Name:** (empty text box)
- Account Type:** [Active Directory]
- Hostname/IP:** (empty text box)
- Timeout(ms):** 10000
- Username:** (empty text box)
- Password:** (empty text box)
- Encrypted:** [yes]
- Port:** 5986
- PowerShell Proxy Hostname/IP:** (empty text box)
- Active Directory Hostname/IP:** (empty text box)
- Domain:** (empty text box)

- **Profile Name.** Name of the credential. Can be any combination of alphanumeric characters.
- **Hostname/IP.** Hostname or IP address of the device from which you want to retrieve data.
 - You can include the variable **%D** in this field. SL1 will replace the variable with the IP address of the device that is currently using the credential.
 - You can include the variable **%N** in this field. SL1 will replace the variable with the hostname of the device that is currently using the credential. If SL1 cannot determine the hostname, SL1 will replace the variable with the primary, management IP address for the current device.
 - You can include the prefix **HOST** or **WSMAN** before the variable **%D** in this field if the device you want to monitor uses a service principal name (for example, "HOST://%D" or "WSMAN://%D"). SL1 will use the WinRM service HOST or WSMAN instead of HTTP and replace the variable with the IP address of the device that is currently using the credential.
- **Username.** Username for an account on the Windows device to be monitored or on the proxy server.

NOTE: The user should not include the domain name prefix in the username for Active Directory accounts. For example, use "em7admin" instead of "MSDOMAIN\em7admin".

- **Encrypted.** Select whether SL1 will communicate with the device using an encrypted connection. Choices are:
 - **yes.** When communicating with the Windows server, SL1 will use a local user account with authentication of type "Basic Auth". You must then use HTTPS and can use a Microsoft Certificate or a self-signed certificate.
 - **no.** When communicating with the Windows server, SL1 will not encrypt the connection.
- **Port.** The port number used by the WinRM service on the Windows device. This field is automatically populated with the default port based on the value you selected in the **Encrypted** field.

- **Account Type.** Type of authentication for the username and password in this credential. Choices are:
 - *Active Directory.* On the Windows device, Active Directory will authenticate the username and password in this credential.
 - *Local.* Local security on the Windows device will authenticate the username and password in this credential.
- **Timeout (ms).** Time, in milliseconds, after which SL1 will stop trying to collect data from the authenticating server. For collection to be successful, SL1 must connect to the authenticating server, execute the PowerShell command, and receive a response within the amount of time specified in this field.
- **Password.** Password for the account on the Windows device to be monitored or on the proxy server.
- **PowerShell Proxy Hostname/IP.** If you use a proxy server in front of the Windows devices you want to communicate with, enter the fully-qualified domain name or the IP address of the proxy server in this field.
- **Active Directory Hostname/IP.** If you selected Active Directory in the **Account Type** field, specify the hostname or IP address of the Active Directory server that will authenticate the credential.
- **Domain.** If you selected Active Directory in the **Account Type** field, specify the domain where the monitored Windows device resides.

5. To save the credential, click the **[Save]** button. To clear the values you set, click the **[Reset]** button.

Error Messages for PowerShell Collection

The following table lists error messages that SL1 can generate during PowerShell collection.

Error Message	Possible Issue(s)
Preauthentication failed while getting initial credentials	Incorrect Password (Active Directory Accounts only)
Client not found in Kerberos database	Username does not exist in Active Directory (Active Directory Accounts only)
KRB5 error code 68 while getting initial credentials	Incorrect domain name (Active Directory Accounts only)
Bad HTTP response returned from server. Code 401, basic auth failed	Incorrect username/password or target server does not allow user account to perform WinRM operations.

Error Message	Possible Issue(s)
ParseError	Incorrect port specified in credential
[Errno 111] Connection refused	Mismatch between server configuration and credential, e.g. encryption option selected but not enabled on server.
Hostname cannot be canonicalized	Forward and/or reverse name resolution are not working from the Data Collector or All-In-One Appliance
Cannot resolve network address for KDC in requested realm	Forward and/or reverse name resolution are not working from the Data Collector or All-In-One Appliance
Configuration file does not specify default realm	Forward and/or reverse name resolution are not working from the Data Collector or All-In-One Appliance
No credentials cache found	Forward and/or reverse name resolution are not working from the Data Collector or All-In-One Appliance
Server not found in Kerbers database	Forward and/or reverse name resolution are not working from the Data Collector or All-In-One Appliance

Credentials for WMI and PowerShell Devices

Overview

This chapter describes how to configure a credentials for WMI and PowerShell Dynamic Applications.

Configuring a WMI Credential

NOTE: Although the SL1 supports WMI Dynamic Applications, ScienceLogic recommends that you use PowerShell Dynamic Applications where possible. PowerShell is the preferred management platform for Microsoft products.

If you configure your Windows system to respond to WMI requests from SL1, you can use WMI Dynamic Applications to collect information from your Windows system.

All of the WMI Dynamic Applications include a discovery object. If you include a credential for WMI Dynamic Applications in the discovery session that includes your Windows system, SL1 will automatically align the appropriate WMI Dynamic Applications to the Windows system. For more information about creating a discovery session, see the *Discovery & Credentials* manual.

You can create a credential for WMI Dynamic Applications from the **Credential Management** page. To create a credential for a WMI Dynamic Application:

1. Go to the **Credential Management** page (System > Manage > Credentials).

2. Select the **[Create]** button in the upper right of the page. Select **Basic/Snippet Credential**.

ID	Name	Platform	OS	Type	Host	Date	
1	IPIS 160	ipmitool	390	SOAP/WMI/Host	NO	443 20000 53 2015-03-12	
2	IPIS 163	ipmitool	449	SOAP/WMI/Host	NO	443 20000 54 2015-03-12	
3	IPChassis	ipmitool	7	SNMP	NO	161 1000 36 2015-03-27	
4	IPChassis (Longer Timeout)	ipmitool	7	SNMP	NO	161 1000 39 2015-03-27	
5	IPChassis - Example	ipmitool	7	Basic/Snippet (SECURITY KEY GOES HERE)	NO	443 20000 10 2015-03-27	
6	IPChassis 7	ipmitool	8	SOAP/WMI/Host	emfApp	NO	6443 10000 52 2015-03-11-28:23
7	IPChassis 8	ipmitool	8	SOAP/WMI/Host	emfApp	NO	6443 10000 51 2015-03-11-27:23
8	IPChassis Performance Service 8.0 Example	ipmitool	8	SOAP/WMI/Host	NO	6443 2000 13 2015-03-11-12:21	
9	IPSET Collector Database	ipmitool	8	Database	root	NO	7707 0 14 2015-03-29 17:15:24
10	IPSET Default V2	ipmitool	54	SNMP	emfDefaultV2	NO	161 1000 10 2015-02-27 16:19:40
11	IPSET Default V3	ipmitool	9	SNMP	emfDefaultV3	NO	161 1000 19 2015-02-27 16:19:40
12	IPSEC - Example	ipmitool	8	Basic/Snippet	root	NO	443 10000 7 2015-03-28 17:14:21
13	IPSEC - Example	ipmitool	8	SNMP	root	NO	161 1000 80 2015-03-29 17:15:00
14	IPSEC - Example	ipmitool	8	Basic/Snippet (SECURITY KEY GOES HERE)	NO	443 10000 16 2015-02-27 16:19:36	
15	IPSEC - Example	ipmitool	8	SNMP	control	NO	161 1000 10 2015-02-27 16:19:14
16	IPSec Endpoint SSHCLI	ipmitool	8	Basic/Snippet	admin	NO	22 3 9 2015-03-28 17:14:02
17	IPSec Endpoint	ipmitool	8	Database	postgres	10.108.44.205	5432 0 56 2015-03-27 16:19:56
18	IPSecSQL	ipmitool	8	Database	sa	10.0.0.241	1433 0 35 2015-02-27 16:35:00
19	IPSecSQL	ipmitool	8	Database	root	NO	7796 0 36 2015-02-27 16:35:07
20	IPSecApp	ipmitool	8	Basic/Snippet	root	NO	443 2000 15 2015-03-29 17:15:00
21	IPSecApp w/SSL Option	ipmitool	8	SOAP/WMI/Host	root	NO	443 2000 83 2015-03-29 17:15:00
22	IPSecApp w/SSL Option Off	ipmitool	8	SOAP/WMI/Host	root	NO	443 2000 81 2015-03-29 17:15:00
23	IPSec - Example	ipmitool	8	Database	user1	my.host	162 1600 65 2015-03-28 17:31:58
24	IPSec - Example	ipmitool	8	Database	user1	my.host	162 1600 70 2015-03-28 17:44:46
25	IPSec - Example	ipmitool	8	Database	user1	my.host	162 1600 75 2015-03-28 17:53:15
26	IPSec - Example	ipmitool	8	Database	EMFADMIN	10.0.0.151	1521 0 32 2015-02-27 16:34:41
27	IPSec - Advanced	ipmitool	8	SOAP/WMI/Host	admin	NO	80 20000 3 2015-03-22 16:54:07
28	IPSec - Interface	ipmitool	8	SOAP/WMI/Host	admin	NO	80 20000 4 2015-02-27 16:19:09
29	IPSec - Interface	ipmitool	8	SOAP/WMI/Host	admin	NO	80 20000 5 2015-02-27 16:19:09
30	IPSec - System	ipmitool	8	SOAP/WMI/Host	admin	NO	80 20000 2 2015-02-27 16:19:09
31	IPSec - System	ipmitool	8	SOAP/WMI/Host	admin	NO	80 20000 6 2015-02-27 16:19:09
32	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 33 2015-02-27 16:34:43
33	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 34 2015-02-27 16:34:43
34	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 35 2015-02-27 16:34:43
35	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 36 2015-02-27 16:34:43
36	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 37 2015-02-27 16:34:43
37	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 38 2015-02-27 16:34:43
38	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 39 2015-02-27 16:34:43
39	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 40 2015-02-27 16:34:43
40	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 41 2015-02-27 16:34:43
41	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 42 2015-02-27 16:34:43
42	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 43 2015-02-27 16:34:43
43	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 44 2015-02-27 16:34:43
44	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 45 2015-02-27 16:34:43
45	IPSec - System	ipmitool	8	Database	NO	192.168.11.135	5432 0 46 2015-02-27 16:34:43

3. The **Credential Editor** page appears, where you can define the following fields:

- **Credential Name.** Name of the credential. Can be any combination of alphanumeric characters.
- **Hostname/IP.** Hostname or IP address of the device from which you want to retrieve data. To use the same WMI default credential for multiple devices, enter %D in this field.
- **Port.** Port number associated with the data you want to retrieve. For WMI Dynamic Applications that perform WBEM requests, supply the port used by the WBEM service on the device. For WMI Dynamic Applications that perform WMI requests, which includes all default WMI Dynamic Applications in SL1, enter any valid port number in this field; the platform does not specify a port number when performing WMI requests.
- **Timeout (ms).** Time, in milliseconds, after which the platform will stop trying to communicate with the authenticating server.
- **Username.** Username for a user account on the device.

NOTE: To specify a domain user, enter the username in the format DOMAIN\username. In most cases, you should use a domain user in the credential and use the format DOMAIN\username.

- **Password.** Password for a user account on the device.

4. To save the credential, select the **[Save]** button. To clear the values you set, select the **[Reset]** button.

Configuring a PowerShell Credential

To define a PowerShell credential in SL1:

1. Collect the information you need to create the credential:
 - The username and password for a user on the Windows device.
 - If the user is an Active Directory account, the hostname or IP address of the Active Directory server and the domain.
 - Whether an encrypted connection should be used.
 - If you are using a Windows Management Proxy, the hostname or IP address of the proxy server.
2. Go to the **Credential Management** page (System > Manage > Credentials).
3. In the **Credential Management** page, click the **[Actions]** menu. Select **Create PowerShell Credential**.

The screenshot shows the 'Credential Management | Credentials Found (62)' page. It features a table with columns for Profile Name, Organization, BO Use, BW Use, DS Use, Type, Credential User, Host, Port, Timeout (ms), ID, and Last. The table lists various credentials such as Amazon Web Services, Azure, Cisco SNMP, and others. On the right side, there is an 'Actions' menu with options like 'Create SNMP Credential', 'Create Database Credential', and 'Create PowerShell Credential', which is highlighted with a red box.

Profile Name	Organization	BO Use	BW Use	DS Use	Type	Credential User	Host	Port	Timeout (ms)	ID	Last
1. Amazon Web Services Credential	System	--	--	--	SOAP/XML Host	AWS Account Access	example.com	80	2000	1	2015-05-14 11:25:12
2. Azure Credential - SOAP/XML	[All Orgs]	--	--	--	SOAP/XML Host	<AD_USER>	login.windows.net	443	60000	69	2015-05-14 11:25:12
3. Azure Credential - SSHKey	[All Orgs]	--	--	--	SSHKey	<SUBSCRIPTION_ID>	ND	22	180000	59	2015-05-14 11:25:12
4. Cisco SNMPV3 - Example	[All Orgs]	--	--	--	SNMP	--	--	161	1500	3	2015-05-14 11:25:12
5. Cisco SNMPV3 - Example	[All Orgs]	--	--	--	SNMP	[USER_GOES_HERE]	--	161	1500	2	2015-05-14 11:25:12
6. Cisco ACI	[All Orgs]	--	--	128	Basic/Snippet	admin	173.38.219.46	443	0	62	2015-05-14 11:25:12
7. Cisco ACI Credential	[All Orgs]	--	--	--	Basic/Snippet	admin	198.18.135.209	443	0	61	2015-05-14 11:25:12
8. Cloudkick - Example	[All Orgs]	--	--	--	Basic/Snippet	[SECURITY KEY GOES]	127.0.0.1	443	5000	9	2015-05-14 11:25:12
9. CUCM PerfmonService 8.0 Example	[All Orgs]	--	--	--	SOAP/XML Host	--	%D	8443	2000	4	2015-05-14 11:25:12
10. EM7 Central Database	[All Orgs]	--	--	--	Database	root	localhost	7706	0	51	2015-05-14 11:26:41
11. EM7 Collector Database	[All Orgs]	--	--	--	Database	root	%D	7707	0	14	2015-05-14 11:25:43
12. EM7 DB	[All Orgs]	--	--	--	Database	root	%D	7706	0	35	2015-05-14 11:26:32
13. EM7 DB - DB Info	[All Orgs]	--	--	--	SOAP/XML Host	root	%D	80	3000	38	2015-05-14 11:26:32
14. EM7 DB - My.cnf	[All Orgs]	--	--	--	SOAP/XML Host	root	%D	80	3000	37	2015-05-14 11:26:32
15. EM7 DB - Site.cnf	[All Orgs]	--	--	--	SOAP/XML Host	root	%D	80	3000	36	2015-05-14 11:26:32
16. EM7 Default V2	[All Orgs]	--	--	--	SNMP	--	--	161	1500	10	2015-05-14 11:25:42
17. EM7 Default V3	[All Orgs]	--	--	--	SNMP	em7defaultv3	--	161	500	11	2015-05-14 11:25:42
18. EMC - Example	[All Orgs]	--	--	--	Basic/Snippet	root	%D	443	10000	15	2015-05-14 11:25:47
19. GDSNet - Example	[All Orgs]	--	--	--	Basic/Snippet	[SECURITY KEY GOES]	127.0.0.1	443	5000	16	2015-05-14 11:25:51
20. IWSLA Example	[All Orgs]	--	--	--	SNMP	--	--	161	1500	5	2015-05-14 11:25:14
21. LifeSize - Endpoint SNMP	[All Orgs]	--	--	--	SNMP	control	--	161	3000	18	2015-05-14 11:25:58
22. LifeSize - Endpoint SSH/CLI	[All Orgs]	--	--	--	Basic/Snippet	auto	%D	22	3	17	2015-05-14 11:25:58
23. Local API	[All Orgs]	--	--	--	Basic/Snippet	em7admin	10.0.0.180	80	5000	22	2015-05-14 11:26:11
24. NetApp T-encode	[All Orgs]	--	--	--	Basic/Snippet	root	%D	443	3000	24	2015-05-14 11:26:20
25. NetApp w/SSL Option	[All Orgs]	--	--	--	SOAP/XML Host	root	%D	443	3000	26	2015-05-14 11:26:20
26. NetApp w/SSL Option Off	[All Orgs]	--	--	--	SOAP/XML Host	root	%D	443	10000	25	2015-05-14 11:26:20
27. Nexus netconf	[All Orgs]	--	--	--	Basic/Snippet	--	--	22	10000	6	2015-05-14 11:25:16
28. Nexus snmp	[All Orgs]	--	--	--	SNMP	--	--	161	10000	7	2015-05-14 11:25:16
29. Polycom - Advanced	[All Orgs]	--	--	--	SOAP/XML Host	admin	%D	80	20000	28	2015-05-14 11:26:24
30. Polycom - CDR	[All Orgs]	--	--	--	SOAP/XML Host	admin	%D	80	20000	31	2015-05-14 11:26:24
31. Polycom - Interface	[All Orgs]	--	--	--	SOAP/XML Host	admin	%D	80	20000	29	2015-05-14 11:26:24



4. The **Credential Editor** page appears, where you can define the following fields:

The screenshot shows the 'Credential Editor' dialog box with the title 'Create New PowerShell Credential'. It has a 'Reset' button in the top right. The dialog is divided into two sections: 'Basic Settings' and 'Active Directory Settings'. In the 'Basic Settings' section, there are fields for 'Profile Name', 'Account Type' (a dropdown menu currently showing '[Active Directory]'), 'Hostname/IP', 'Timeout(ms)' (with the value '10000'), 'Username', 'Password', 'Encrypted' (a dropdown menu currently showing '[yes]'), 'Port' (with the value '5986'), and 'PowerShell Proxy Hostname/IP'. The 'Active Directory Settings' section has fields for 'Active Directory Hostname/IP' and 'Domain'. A 'Save' button is located at the bottom center of the dialog.

- **Profile Name.** Name of the credential. Can be any combination of alphanumeric characters.
- **Hostname/IP.** Hostname or IP address of the device from which you want to retrieve data.
 - You can include the variable **%D** in this field. SL1 will replace the variable with the IP address of the device that is currently using the credential.
 - You can include the variable **%N** in this field. SL1 will replace the variable with the hostname of the device that is currently using the credential. If SL1 cannot determine the hostname, SL1 will replace the variable with the primary, management IP address for the current device.
 - You can include the prefix **HOST** or **WSMAN** before the variable **%D** in this field if the device you want to monitor uses a service principal name (for example, "HOST://%D" or "WSMAN://%D"). SL1 will use the WinRM service HOST or WSMAN instead of HTTP and replace the variable with the IP address of the device that is currently using the credential.
- **Username.** Username for an account on the Windows device to be monitored or on the proxy server.

NOTE: The user should not include the domain name prefix in the username for Active Directory accounts. For example, use "em7admin" instead of "MSDOMAIN\em7admin".

- **Encrypted.** Select whether SL1 will communicate with the device using an encrypted connection. Choices are:
 - *yes.* When communicating with the Windows server, SL1 will use a local user account with authentication of type "Basic Auth". You must then use HTTPS and can use a Microsoft Certificate or a self-signed certificate.
 - *no.* When communicating with the Windows server, SL1 will not encrypt the connection.
- **Port.** The port number used by the WinRM service on the Windows device. This field is automatically populated with the default port based on the value you selected in the **Encrypted** field.

- **Account Type**. Type of authentication for the username and password in this credential. Choices are:
 - *Active Directory*. On the Windows device, Active Directory will authenticate the username and password in this credential.
 - *Local*. Local security on the Windows device will authenticate the username and password in this credential.
- **Timeout (ms)**. Time, in milliseconds, after which SL1 will stop trying to collect data from the authenticating server. For collection to be successful, SL1 must connect to the authenticating server, execute the PowerShell command, and receive a response within the amount of time specified in this field.
- **Password**. Password for the account on the Windows device to be monitored or on the proxy server.
- **PowerShell Proxy Hostname/IP**. If you use a proxy server in front of the Windows devices you want to communicate with, enter the fully-qualified domain name or the IP address of the proxy server in this field.
- **Active Directory Hostname/IP**. If you selected Active Directory in the **Account Type** field, specify the hostname or IP address of the Active Directory server that will authenticate the credential.
- **Domain**. If you selected Active Directory in the **Account Type** field, specify the domain where the monitored Windows device resides.

5. To save the credential, click the **[Save]** button. To clear the values you set, click the **[Reset]** button.

Example

1

1

Creating a WMI Performance Dynamic Application

Overview

In this example we will create a WMI Dynamic Application. Our Dynamic Application will collect the following information from a network interface running on a Windows computer: Total bytes, current bandwidth, name, packets per second, outbound errors, and received errors.


NOTE: This example Dynamic Application is included in the Microsoft Base Pack PowerPack, version 1.5 and later.

Defining the WMI Request

To create the Dynamic Application and define the general properties for this Dynamic Application, perform the following steps:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the **[Actions]** button, and then select *Create New Dynamic Application*. The **Dynamic Applications Create New Application** page appears.

3. Supply values in the following fields:

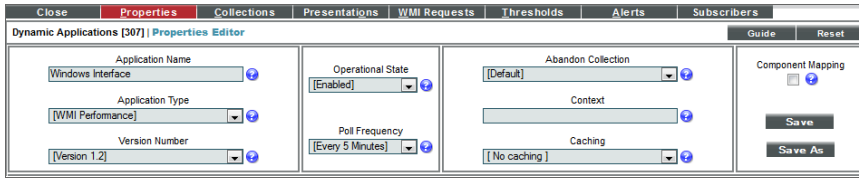

- **Application Name.** Enter *Windows Interface* in this field.
- **Application Type.** Select *WMI Performance*.
- **Poll Frequency.** Select *Every 5 Minutes*.

4. For this example, you can leave the remaining fields at their default value. Select the **[Save]** button to save the Dynamic Application.

Adding the WMI Request

In SL1, each WMI Dynamic Application must include at least one WMI or WBEM request.

WMI objects are populated when the Dynamic Application executes a WMI request. WMI requests use WQL (WMI Query Language) to query WMI classes (tables) to retrieve data. A single WMI request can populate multiple WMI objects by querying for multiple class properties (table columns).


WMI objects are aligned with properties (column). The definition of each object specifies the WMI request that will populate the object and the property name to align with the object. The retrieved values of the property will populate the object.

For more details on WMI requests, see the chapter [WMI Requests](#) in this manual.

To create the WMI request for this Dynamic Application:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the wrench icon (🔧) for the *Windows Interface* Dynamic Application. The **Dynamic Applications Properties Editor** page appears.
3. Select the **[WMI Requests]** tab. The **WMI Request Editor & Registry** page appears.

4. Supply values in the following fields:

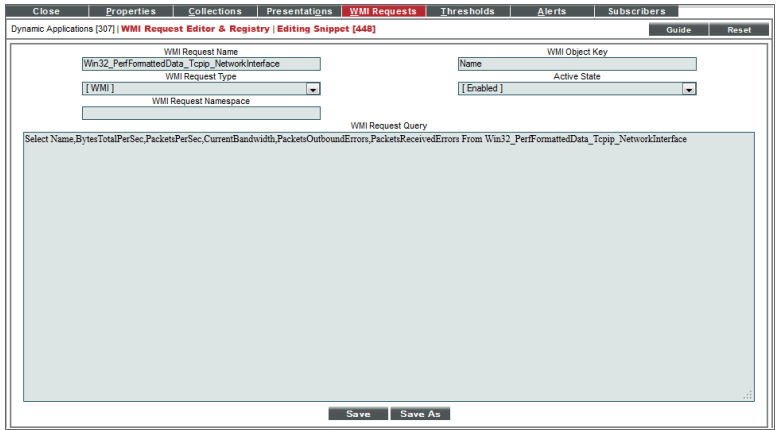

- **WMI Request Name.** We named our WMI Request "Win32_PerfFormattedData_Tcpip_NetworkInterface"
- **WMI Request Type.** Select *WMI*.
- **WMI Object Key.** The unique key for each instance (row) returned by the request. This unique key must be a property (column) name, and the request must include that property (column) and return values from that property name (column). The selected property (column) must return the same values over all polling periods. The "Name" property (column) meets these criteria. Enter "Name" in this field.
- **Active State.** Select *Enabled*.
- **WMI Request Query.** This Dynamic Application is getting values from the Win32_PerfFormattedData_Tcpip_NetworkInterface class (table), and will collect the following values: Interface name, total bytes, current bandwidth, name, outbound errors, and received errors. We entered the following in the WMI Request Query:

```
Select
Name,BytesTotalPerSec,PacketsPerSec,CurrentBandwidth,PacketsOutboundErrors,PacketsReceivedErrors From Win32_PerfFormattedData_Tcpip_NetworkInterface
```


5. Select the **[Save As]** button to save the WMI Request.


Adding the Collection Objects

Our example Dynamic Application has six collection objects:

- Total Bytes per second
- Current Bandwidth
- Interface Name
- Packets per second
- Outbound errors
- Received errors

To create these collection objects, perform the following steps:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the wrench icon () for the *Windows Interface* Dynamic Application. The **Dynamic Applications Properties Editor** page appears.
3. Select the **[Collections]** tab. The **Dynamic Applications | Collections Objects** page appears.
4. To create the collection object for *Total Bytes*, supply values in the following fields:

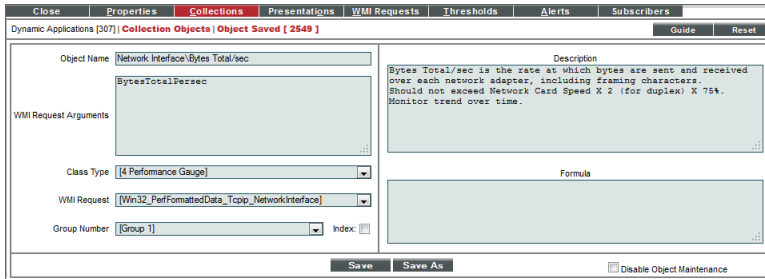


The screenshot shows the 'Dynamic Applications | Collections Objects' configuration window. The 'Object Name' is 'Network Interface\Bytes Total/sec'. The 'WMI Request Arguments' field contains 'BytesTotalPersec'. The 'Class Type' is set to 'Performance Gauge'. The 'WMI Request' is 'Win32_PerfFormattedData_Tcpip_NetworkInterface'. The 'Group Number' is 'Group 1'. The 'Description' field contains the text: 'Bytes Total/sec is the rate at which bytes are sent and received over each network adapter, including framing characters. Should not exceed Network Card Speed X 2 (for duplex) X 75%. Monitor trend over time.' The 'Formula' field is empty. Buttons for 'Save', 'Save As', 'Disable Object Maintenance', 'Guide', and 'Reset' are visible at the bottom.

- **Object Name.** We named our collection object "Network Interface\Bytes Total/sec"
 - **WMI Request Argument.** In this field, you must specify the name of the property (table column) to associate with this object. Enter "BytesTotalPersec" in this field.
 - **Class Type.** Total bytes per second is a number that can go up or down between polls. Select *Performance Gauge* in this field.
 - **WMI Request.** Name of the WMI request associated with this object. Select *Win32_PerfFormattedData_Tcpip_NetworkInterface*.
 - **Group Number.** Select *Group 1*. For performance Dynamic Applications, SL1 uses the **Group Number** setting to associate performance values with the appropriate labels. For the performance graph for this example to display labels correctly, all the collection objects must be in the same group.
 - **Description.** A description of the object. This is an optional field. We provided a summary of the object in this field.
5. For this example, you can leave the remaining fields set to their default values.
 6. Select the **[Save]** button.
 7. Select the **[Reset]** button to clear the form fields.
 8. To create the following Collection Objects for Current Bandwidth, Packets Per Second, Outbound Errors, and Received Errors collection objects, repeat step 4, using the following values in the **WMI Request Argument** field. These values match the properties defined in the WMI Request for this Dynamic Application.

Collection Object	WMI Request Argument
Network Interface/Current Bandwidth	Current Bandwidth
Network Interface/Packets/sec	PacketsPerSec
Network Interface/Outbound Errors	PacketsOutbandErrors
Network Interface/Received Errors	PacketsReceivedErrors

9. To create the Interface Name collection object, which will be the label for the performance report, supply the following values in the **Dynamic Applications | Collections Objects** page:

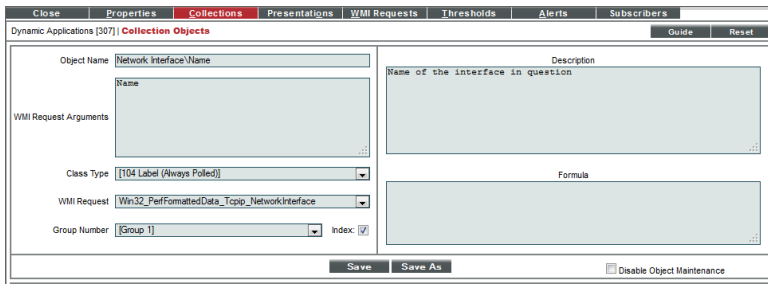

- **Object Name.** We named this collection object "Network Interface\Name".
- **WMI Request Argument.** In this field, you must specify the name of the property (table column) to associate with this object. Enter "Name" in this field.
- **Class Type.** Select *Label (Always Polled)* in this field. In performance Dynamic Applications, collection objects that use this class type are string values that SL1 uses to label the lines on a performance graph.
- **WMI Request.** Name of the WMI request associated with this object. Select *Win32_PerfFormattedData_Tcpip_NetworkInterface*.
- **Group Number.** Select *Group 1*. For performance Dynamic Applications, SL1 uses the **Group Number** setting to associate performance values with the appropriate labels. For the performance graph for this example to display labels correctly, all the collection objects must be in the same group.
- **Description.** A description of the object. This is an optional field. We provided a summary of the object in this field.

10. For this example, you can leave the remaining fields set to their default values.

11. Select the **[Save]** button.

Creating the Presentation Objects

When you create a collection object in a Dynamic Application of type Performance, SL1 automatically creates a presentation object that corresponds to that collection object. In this example, we will remove these presentation objects and create new presentation objects for each collection object defined above.


To create the presentation objects:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the wrench icon (🔧) for the *Windows Interface* Dynamic Application.
3. Select the **[Presentations]** tab. The **Dynamic Applications Presentation Objects** page appears.
4. In the **Dynamic Applications Presentation Objects** page, each collection object created in the **Adding the Collection Objects** section has been created by default. Select each presentation object's bomb icon (💣) to delete them.
5. Select the **[Reset]** button. To create the presentation object that displays Total Bytes Per Second, enter values in the following fields:


The screenshot shows the 'Presentations' tab in the Dynamic Applications Manager. The 'Report Name' is 'Bytes Total per Second', 'Active State' is 'Enabled', 'Data Unit' is 'Bytes/Second', 'Abbreviation / Suffix' is 'B', 'Show as Percent' is 'No', and 'Vitals Link' is 'Disabled'. The 'Formula Editor' contains the formula '(e_2649)'. Below the formula editor is a table with columns for digits and operators, and a list of WMI objects: '2549: Network Interface.Bytes Total/sec', '2551: Network Interface.Packets/sec', and '2552: Network Interface.Current Bandwidth'. The 'Add' button is highlighted. A 'Guide Text' box at the bottom left explains the formula: 'Bytes Total/sec is the rate at which bytes are sent and received over each network adapter, including framing characters. Should not exceed Network Card Speed X 2 (for duplex) X 75%. Monitor trend over time.' 'Save' and 'Save As' buttons are at the bottom right.

- **Report Name.** Enter "Bytes Total per Second" in this field.
 - **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
 - **Data Unit.** Enter "Bytes/Second" into this field.
 - **Abbreviation / Suffix.** Enter "Bps" into this field.
 - **Show as Percent.** Select *No*. The graph will not display percent values.
 - **Formula Editor.** In this field, enter the object ID for the Total Bytes Per Second collection object, surrounded by parentheses.
6. For this example, you can leave the remaining fields set to their default values.
 7. Select the **[Save]** button to save the presentation object.

- Select the **[Reset]** button. For the Current Bandwidth presentation object, enter the following values in the **Dynamic Applications Presentation Objects** page:

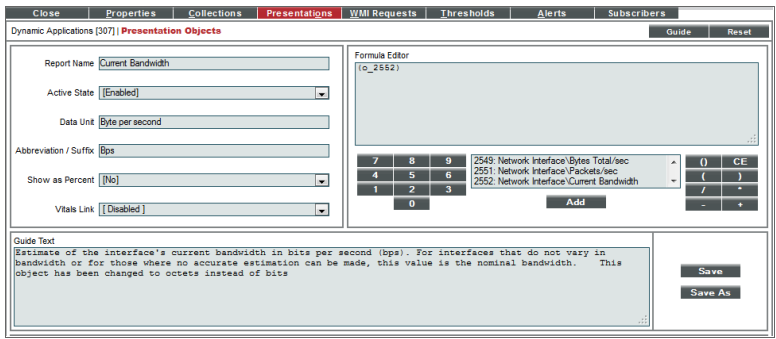

- **Report Name.** Enter "CurrentBandwidth" in this field.
 - **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
 - **Data Unit.** Enter "Bytes per second" into this field.
 - **Abbreviation / Suffix.** Enter "Bps" into this field.
 - **Show as Percent.** Select *No*. The graph will not display percent values.
 - **Vitals Link.** Select *Disabled*.
 - **Formula Editor.** In this field, enter the object ID for the Current Bandwidth collection object, surrounded by parentheses.
- For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.
 - Select the **[Reset]** button. For the Interface Utilization presentation object, enter the following values in the **Dynamic Applications Presentation Objects** page:

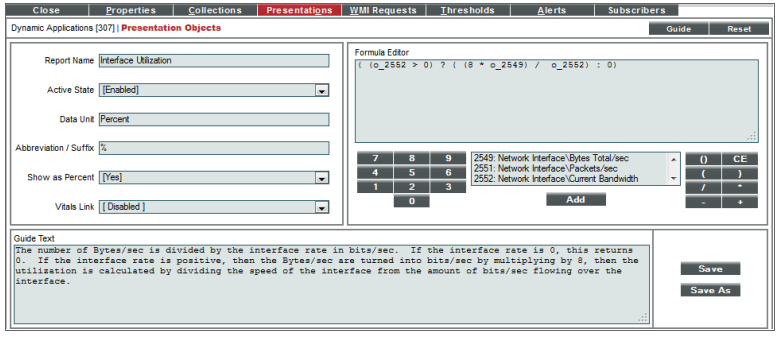

- **Report Name.** Enter "Interface Utilization" in this field.
- **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
- **Data Unit.** Enter "Percent" into this field.

- **Abbreviation / Suffix.** Enter "%" into this field.
- **Show as Percent.** Select Yes. The graph will display percent values.
- **Formula Editor.** In this field, enter the following formula:


$((\langle \text{object ID for Current Bandwidth} \rangle > 0) ? ((8 * \langle \text{object ID for Bytes Total/sec} \rangle) / \langle \text{object ID for Current Bandwidth} \rangle) : 0)$

For example, if the object ID for Current Bandwidth is o_7034 and the object ID for Bytes Total/sec is o_7031, enter:

$((o_7034 > 0) ? (8 * o_7031) / o_7034 : 0)$

This formula includes a collection object as a divisor. To prevent an error from occurring when the divisor returns zero, the formula includes a ternary operator that tests to see if the divisor is zero. If the divisor is zero, the formula returns zero. If the divisor is greater than zero, the formula converts the "Bytes Total/sec collection object in to Bits Total/sec, then divides the total bits/second by the speed of the interface.


11. For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.
12. Select the **[Reset]** button. For the Packets Per Second presentation object, enter the following values in the **Dynamic Applications Manager** page:

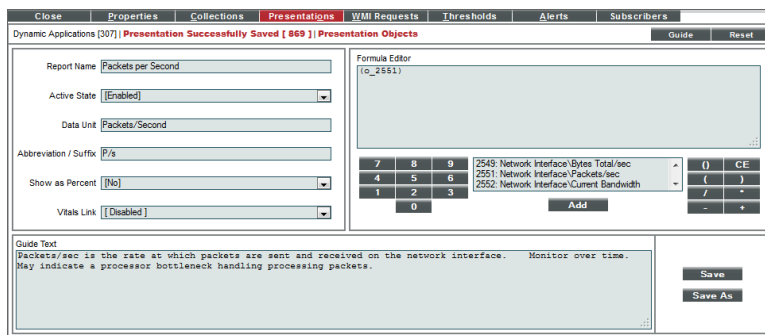


- **Report Name.** Enter "Packets per Second" in this field.
- **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
- **Data Unit.** Enter "Packets/Second" into this field.
- **Abbreviation / Suffix.** Enter "P/s" into this field.
- **Show as Percent.** Select *No*. The graph will not display percent values.
- **Formula Editor.** In this field, enter the object ID for the Packets Per Second collection object, surrounded by parentheses.

13. For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.

- Select the **[Reset]** button. For the Outbound Errors presentation object, enter the following values in the **Dynamic Applications Manager** page:

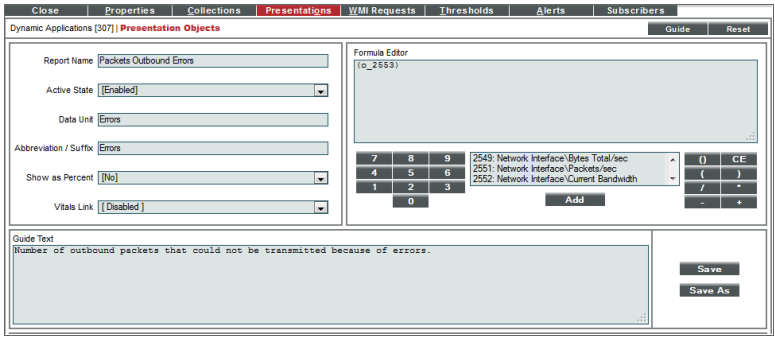

- **Report Name.** Enter "PacketsOutboundErrors" in this field.
 - **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
 - **Data Unit.** Enter "Errors" into this field.
 - **Abbreviation / Suffix.** Enter "Errors" into this field.
 - **Show as Percent.** Select *No*. The graph will not display percent values.
 - **Formula Editor.** In this field, enter the object ID for the Outbound Errors collection object, surrounded by parentheses.
- For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.
 - Select the **[Reset]** button. For the Inbound Errors presentation object, enter the following values in the **Dynamic Applications Manager** page:

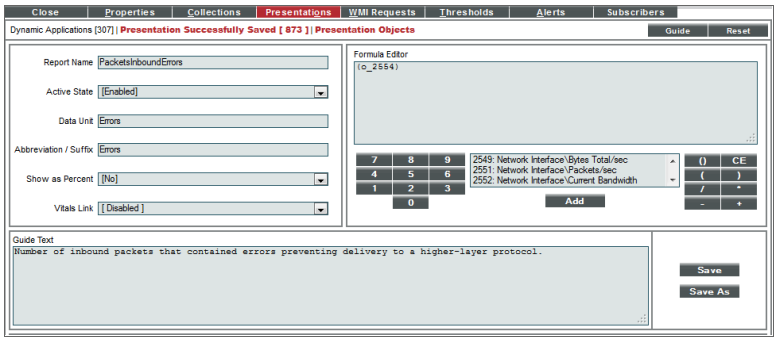

- **Report Name.** Enter "PacketsInboundErrors" in this field.
- **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
- **Data Unit.** Enter "Errors" into this field.
- **Abbreviation / Suffix.** Enter "Errors" into this field.

- **Show as Percent.** Select *No*. The graph will not display percent values.
- **Formula Editor.** In this field, enter the object ID for the Inbound Errors collection object, surrounded by parentheses.

17. For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.

Creating a Credential

To use the Windows Interface Dynamic Application, we must include a Basic/Snippet credential. To create the Basic/Snippet credential:

1. Go to the **Credential Management** page (System > Manage > Credentials).
2. Select the **[Create]** button, and then select *Basic/Snippet Credential*. The **Create New Basic/Snippet Credential** page appears.
3. Define values in the following fields:

- **Credential Name.** Enter "Windows Interface WMI" in this field.
- **[Hostname/IP].** Enter "%D" in this field. SL1 will replace the variable with the IP address of the device that is currently using the credential.
- **Port.** Enter "1521" in this field. This is the default port for WMI.
- **Timeout.** Enter "5000" in this field. SL1 will stop trying to communicate with the authenticating server after 5000 seconds.
- **Username.** Enter the username for a user account in this field that will provide access to the monitored Windows device.
- **Password.** Enter a password for a user account that will provide access to the monitored Windows device


4. Select the **[Save]** button to save the credential.

Manually Aligning the Dynamic Application to a Device

In this example we will align the Dynamic Application to a Windows device running WMI. By manually aligning the Dynamic Application to a device, we can immediately view the interface data in the presentation objects we defined.

To manually align the Dynamic Application to a device:

1. Go to the **Device Manager** page (Registry > Devices > Device Manager).
2. In the **Device Manager** page, find the device you want to align the Dynamic Application to. In this example, we are aligning the Dynamic Application to a Windows device running WMI. Select the device's wrench icon (🔧).
3. The **Device Properties** page appears. Select the **[Collections]** tab.
4. In the **Dynamic Application Collections** page, select the **[Action]** button and select *Add Dynamic Application*. The **Dynamic Application Alignment** page appears.

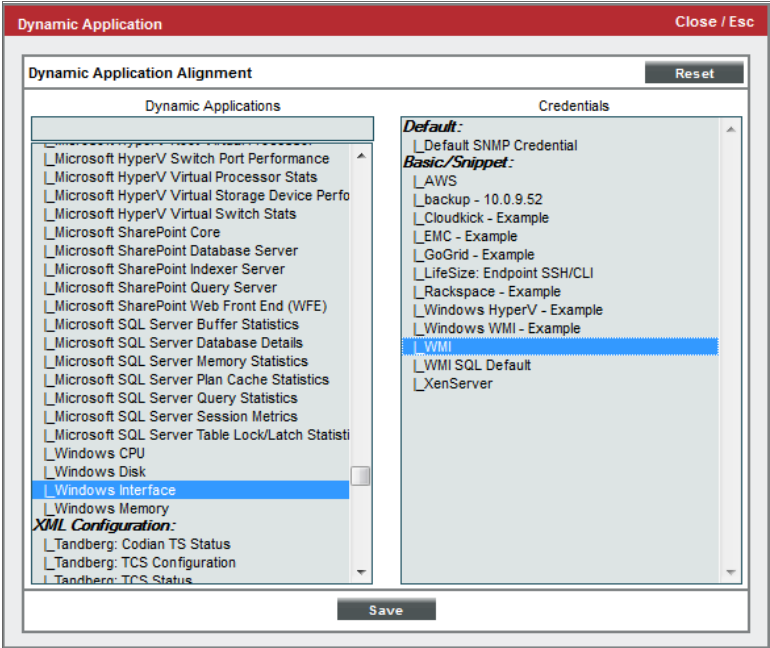

5. Select the **Windows Interface** Dynamic Application in the **Dynamic Applications** pane, and select **Windows Interface WMI** in the **Credentials** pane.
6. Select the **[Save]** button to add the Dynamic Application.


Viewing the Performance Reports

After the Dynamic Application has collected the data specified in the collection objects, you can view the performance report for the device. To view the performance report for the device with the *Windows Interface* Dynamic Application aligned to it:

1. From the **Dynamic Application Collections** page, select the **[Reset]** button to update the page with the latest information.
2. Locate the *Windows Interface* Dynamic Application. If the graph icon (📊) is colored, the performance report is available. Select the graph icon for the presentation object you want to view.

Or:

1. Go to the **Device Manager** page (Registry > Devices > Device Manager).
2. In the **Device Manager** page, find the test device you aligned the *Windows Interface* Dynamic Application to. Select the device's graph icon (📊).
3. The **Device Summary** page appears. Select the **[Performance]** tab.
4. In the left NavBar, select any of the presentation objects you created in the section [Creating the Presentation Objects](#) in this chapter. In this example, we selected *Bytes Total per Second*.

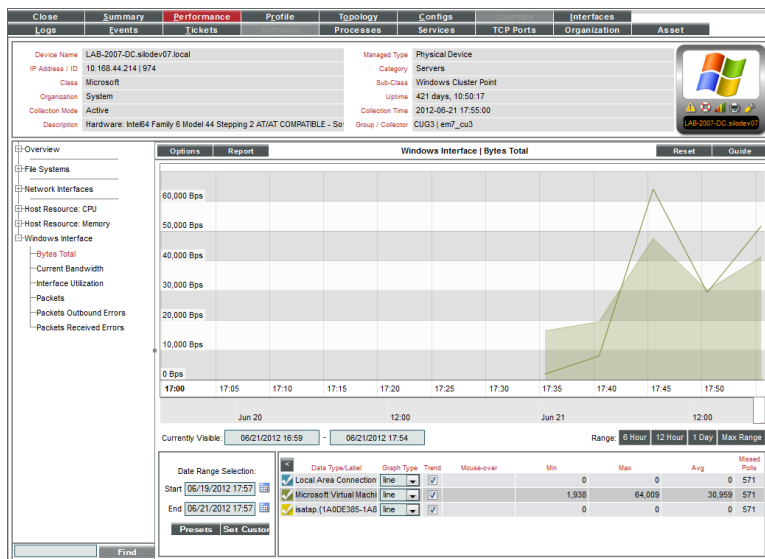

5. The Windows Interface | Bytes Total per Second report is displayed.
 - The report displays the collected values from the collection object Network Interface\Bytes Total/sec.
 - You can mouseover different data points on the report, and the report will display the total bytes moving through the interface at the time selected on the graph.

- The amount of bytes is shown to the left of the report.
- The values for each label object are displayed in the graph key at the bottom of the page.

6. To learn more about performance reports, see the manual ***Monitoring Device Infrastructure Health***.

Example

2

Creating a PowerShell Performance Dynamic Application

Overview

In this example we will create a PowerShell Dynamic Application. Our Dynamic Application will collect the Processor Queue Length from a Windows computer.

NOTE: This example Dynamic Application is included in the Microsoft: Windows Server PowerPack, version 1.0 and later. This example describes how to create only one of the requests, collection objects, and presentation objects that are included in the Microsoft: Windows Server PowerPack version of this Dynamic Application.

Creating the Dynamic Application

To create the Dynamic Application and define the general properties for this Dynamic Application, perform the following steps:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the **[Actions]** button, and then select *Create New Dynamic Application*. The **Dynamic Applications Create New Application** page appears.

- Supply values in the following fields:

The screenshot shows a web interface for creating a new dynamic application. It features a header with 'Close' and 'Create' buttons, and a sub-header 'Dynamic Applications | Create New Application' with 'Guide' and 'Reset' buttons. The main area is a grid of four columns of controls. The first column contains text and dropdown fields for application name, type, caching, and dashboard. The second column contains dropdowns for version, state, and frequency. The third column contains dropdowns for collection, context, row options, and column options. The fourth column contains checkboxes for data rollup and component mapping, and a 'Save' button.

- **Application Name.** Enter "Microsoft: Windows Server CPU Performance" in this field.
- **Application Type.** Select *PowerShell Performance*.
- **Polling Frequency.** Select *Every 5 Minutes*.

- For this example, you can leave the remaining fields at their default value. Select the **[Save]** button to save the Dynamic Application.

Adding the PowerShell Command

In SL1, each PowerShell Dynamic Application must include at least one PowerShell Command.

The collection objects in a PowerShell Dynamic Application are populated when SL1 executes a PowerShell Command.

Collection objects in PowerShell Dynamic Applications are aligned with properties (columns). The definition of each object specifies the PowerShell command that will populate the object and the property name to align with the object. The retrieved values of the property will populate the object.

To create the PowerShell command for this Dynamic Application:

- Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
- Select the wrench icon for the "Microsoft: Windows Server CPU Performance" Dynamic Application. The **Dynamic Applications Properties Editor** page appears.
- Select the **[PowerShell]** tab. The **PowerShell Command Editor and Registry** page appears.

4. Supply values in the following fields:

The screenshot shows the 'PowerShell Command Editor & Registry' window. The 'PowerShell' tab is selected. The 'PowerShell Command Name' is 'Server CPU Processor Queue-Length'. The 'Active State' is '[Enabled]'. The 'Response Object Key' is empty. The 'PowerShell Type' is '[Not Exchange]'. The 'PowerShell Command Query' is '(Get-Counter "\System\Processor Queue Length").CounterSamples | Select-Object CookedValue'. The 'Save' and 'Save As' buttons are at the bottom.

- **PowerShell Command Name.** We named our PowerShell Command "Server CPU Processor Queue-Length".
- **Active State.** Select *Enabled*.
- **PowerShell Command Query.** This Dynamic Application collects the *CookedValue* property from `\System\Processor Queue Length`: . We entered the following in the **PowerShell Command Query** field:

```
(Get-Counter "\System\Processor Queue Length").CounterSamples | Select-Object CookedValue
```

5. Select the **[Save As]** button to save the PowerShell command.

Adding the Collection Object

Our example Dynamic Application has one collection object: Processor Queue Length.

To create the collection object, perform the following steps:

1. Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
2. Select the wrench icon (🔧) for the "Microsoft: Windows Server CPU Performance" Dynamic Application. The **Dynamic Applications Properties Editor** page appears.
3. Select the **[Collections]** tab. The **Dynamic Applications | Collections Objects** page appears.

- To create the collection object for Processor Queue Length, supply values in the following fields:

The screenshot shows the 'Collection Objects' configuration window. The 'Object Name' is 'Processor Queue Length'. The 'PowerShell Arguments' field contains 'CookedValue'. The 'Class Type' is set to '4 Performance Gauge'. The 'PowerShell Request' is 'Server CPU Processor Queue-Length'. The 'Group / Usage Type' is set to 'No Group' and 'Standard'. The 'Description' field contains a detailed text description of the Processor Queue Length metric. The 'Enable Deviation Alerting' section has two input fields for 'max weeks data' and 'min weeks data', both set to '0'. The 'Save' and 'Save As' buttons are visible at the bottom.


- **Object Name.** We named our collection object "Processor Queue Length".
 - **PowerShell Argument.** In this field, you must specify the name of the property to associate with this object. Enter "CookedValue" in this field.
 - **Class Type.** Processor Queue Length is a number that can go up or down between polls. Select 4 Performance Gauge in this field.
 - **PowerShell Request.** Name of the PowerShell request associated with this object. Select Server CPU Processor Queue Length.
 - **Group Number.** Select No Group. For performance Dynamic Applications, SL1 uses the Group Number setting to associate performance values with the appropriate labels.
 - **Description.** A description of the object. This is an optional field. We provided a summary of the object in this field.
- For this example, you can leave the remaining fields set to their default values.
 - Select the **[Save]** button.


Creating the Presentation Object

When you create a collection object in a Dynamic Application of type Performance, SL1 automatically creates a presentation object that corresponds to that collection object. In this example, we will edit the presentation object for the Processor Queue Length to create a new presentation object for the Processor Queue Length.

To create the Processor Queue Length presentation object:

- Go to the **Dynamic Applications Manager** page (System > Manage > Applications).
- Select the wrench icon (🔧) for the "Microsoft: Windows Server CPU Performance".
- Select the **[Presentation]** tab. The **Dynamic Applications Presentation Objects** page appears.

- In the **Dynamic Applications Presentation Objects** page, the Processor Queue Length collection object created in the [Adding the Collection Objects](#) section has been created by default. Select the Processor Queue Length presentation object's wrench icon () to edit it.
- To create the presentation object that displays the Processor Queue Length, supply values in the following fields:

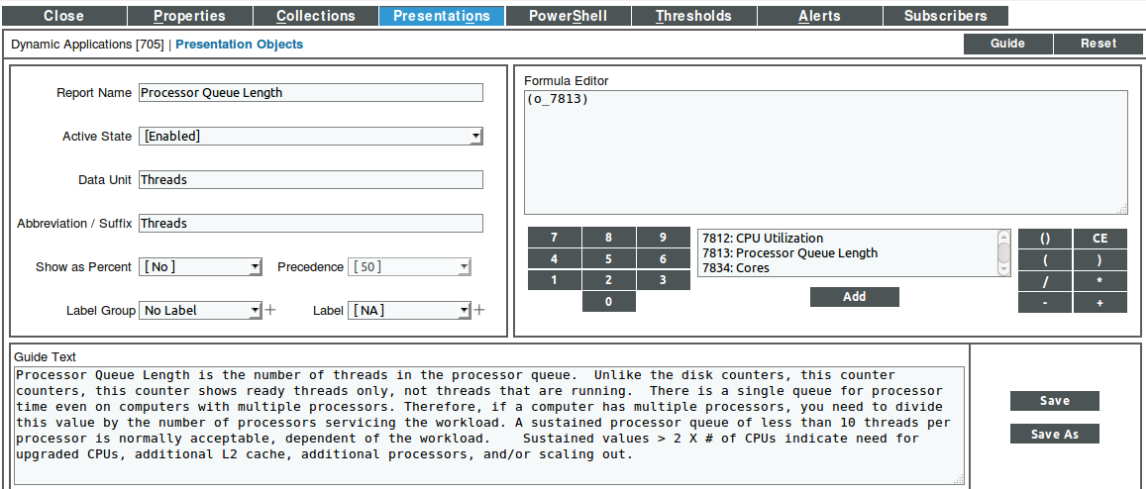

The screenshot shows the configuration page for a presentation object. The 'Report Name' field contains 'Processor Queue Length'. The 'Active State' dropdown is set to 'Enabled'. The 'Data Unit' and 'Abbreviation / Suffix' fields both contain 'Threads'. The 'Show as Percent' dropdown is set to 'No', and the 'Precedence' field contains '50'. The 'Label Group' is 'No Label' and the 'Label' is '[NA]'. The 'Formula Editor' contains '(o_7813)'. Below the formula editor is a numeric keypad and a list of collection objects: 7812: CPU Utilization, 7813: Processor Queue Length, and 7834: Cores. The 'Add' button is next to the list. At the bottom right, there are 'Save' and 'Save As' buttons. The 'Guide Text' area contains a detailed explanation of the Processor Queue Length counter.

- **Report Name.** Enter "Processor Queue Length".
 - **Active State.** Select *Enabled*. SL1 will generate a report of the presentation object.
 - **Data Unit.** Enter "Threads" into this field.
 - **Abbreviation / Suffix.** Enter "Threads" into this field.
 - **Show as Percent.** Select *No*. The graph will not display percent values.
- For this example, you can leave the remaining fields set to their default values. Select the **[Save]** button to save the presentation object.

Creating a Credential

To use the "Microsoft: Windows Server CPU Performance" Dynamic Application, we must create a PowerShell credential. To create the PowerShell credential:

- Go to the **Credential Management** page (System > Manage > Credentials).
- Select **[Create]** button, and then select *PowerShell Credential*. The Create New PowerShell Credential page appears.

- Supply values in the following fields:

The screenshot shows the 'Credential Editor [62]' window. The title bar includes 'Close / Esc'. The main window has a blue header with 'Edit PowerShell Credential #62' and 'New' and 'Reset' buttons. The 'Basic Settings' section contains the following fields: 'Profile Name' (PowerShell 2k12r2 [AD]), 'Account Type' (Active Directory), 'Hostname/IP' (%D), 'Timeout(ms)' (3000), 'Username' (Em7admin), 'Password' (masked with asterisks), 'Encrypted' (no), 'Port' (5985), and 'PowerShell Proxy Hostname/IP' (empty). The 'Active Directory Settings' section contains 'Active Directory Hostname/IP' (TL012R2-DC-01.MSTL012R2.LOCAL) and 'Domain' (MSTL012R2.LOCAL). At the bottom are 'Save' and 'Save As' buttons.


- **Profile Name.** Enter a credential name in this field. We entered "PowerShell 2k12R2 [AD]" in this example.
 - **Account Type.** Select the account type of the user that will provide access to the monitored Windows device.
 - **Hostname/IP.** Enter "%D" in this field. SL1 will replace the variable with the IP address of the device that is currently using the credential.
 - **Timeout (ms).** Enter "3000" in this field. SL1 will stop trying to communicate with the authenticated server after 3000 ms.
 - **Username.** Enter the username for a user that will provide access to the monitored Windows device.
 - **Password.** Enter the password for the user account you entered in the **Username** field.
 - **Encrypted.** Select whether encryption is configured on the monitored Windows device.
 - **Port.** The port should be automatically selected after selecting a value in the **Encrypted** field.
 - **PowerShell Proxy Hostname./IP.** Do not enter a value this field unless you have configured a Windows device to serve as an intermediary proxy to retrieve PowerShell data from the target Windows device.
 - **Active Directory Hostname/IP.** If you are using an active directory user account, enter the Hostname or IP address of the managed device's corresponding domain controller from the active directory forest.
 - **Domain.** Enter your Active Directory Domain.
- Select the **[Save]** button to save the credential.

Manually Aligning the Dynamic Application to a Device

In this example we will align the Dynamic Application to a Windows device that is configured for monitoring via PowerShell. By manually aligning the Dynamic Application to a device, we can immediately view the performance data in the presentation object we defined.

To manually align the Dynamic Application to a device:

1. Go to the **Device Manager** page (Registry > Devices > Device Manager).
2. In the **Device Manager** page, find the device you want to align with the Dynamic Application. In this example, we are aligning the Dynamic Application to a Windows device that is configured for monitoring via PowerShell. Select the wrench icon for the device (🔧).
3. The **Device Properties** page appears. Select the **[Collections]** tab.
4. In the **Dynamic Application Collections** page, select the **[Action]** button and select *Add Dynamic Application*. The **Dynamic Application Alignment** page appears:

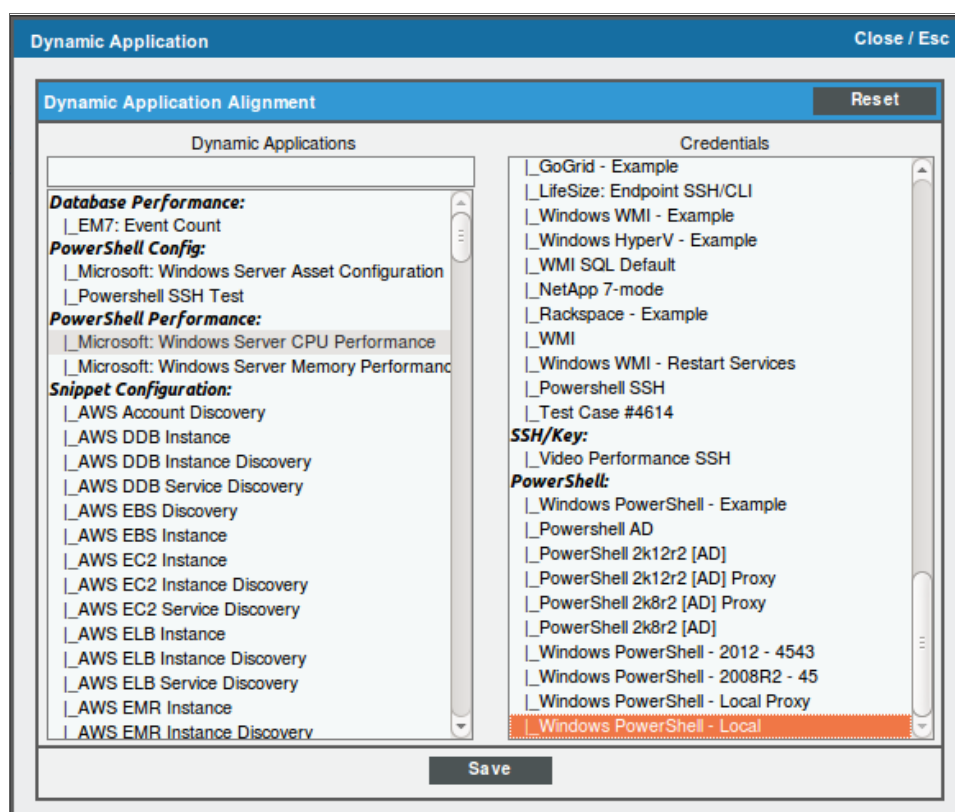

5. Select the "Microsoft: Windows Server CPU Performance" Dynamic Application in the **Dynamic Applications** field, and select the appropriate PowerShell credential in the **Credentials** field.
6. Select the **[Save]** button to add the Dynamic Application.


Viewing the Performance Report

After the Dynamic Application has collected the data specified in the collection objects, you can view the performance report for the device. To view the performance report for the device with the "Microsoft: Windows Server CPU Performance" Dynamic Application aligned to it:

1. From the **Dynamic Application Collections** page, select the **[Reset]** button to update the page with the latest information.
2. Locate the "Microsoft: Windows Server CPU Performance" Dynamic Application. If the graph icon is colored, the performance report is available. Select the graph icon (📊) for the presentation object you want to view.

Or:

1. Go to the **Device Manager** page (Registry > Devices > Device Manager).
2. In the **Device Manager** page, find the test device you aligned the "Microsoft: Windows Server CPU Performance" Dynamic Application. Select the device's graph icon.
3. The **Device Summary** page appears. Select the **[Performance]** tab.
4. In the left NavBar, select the presentation object you created in the section [Creating the Presentation Objects](#):

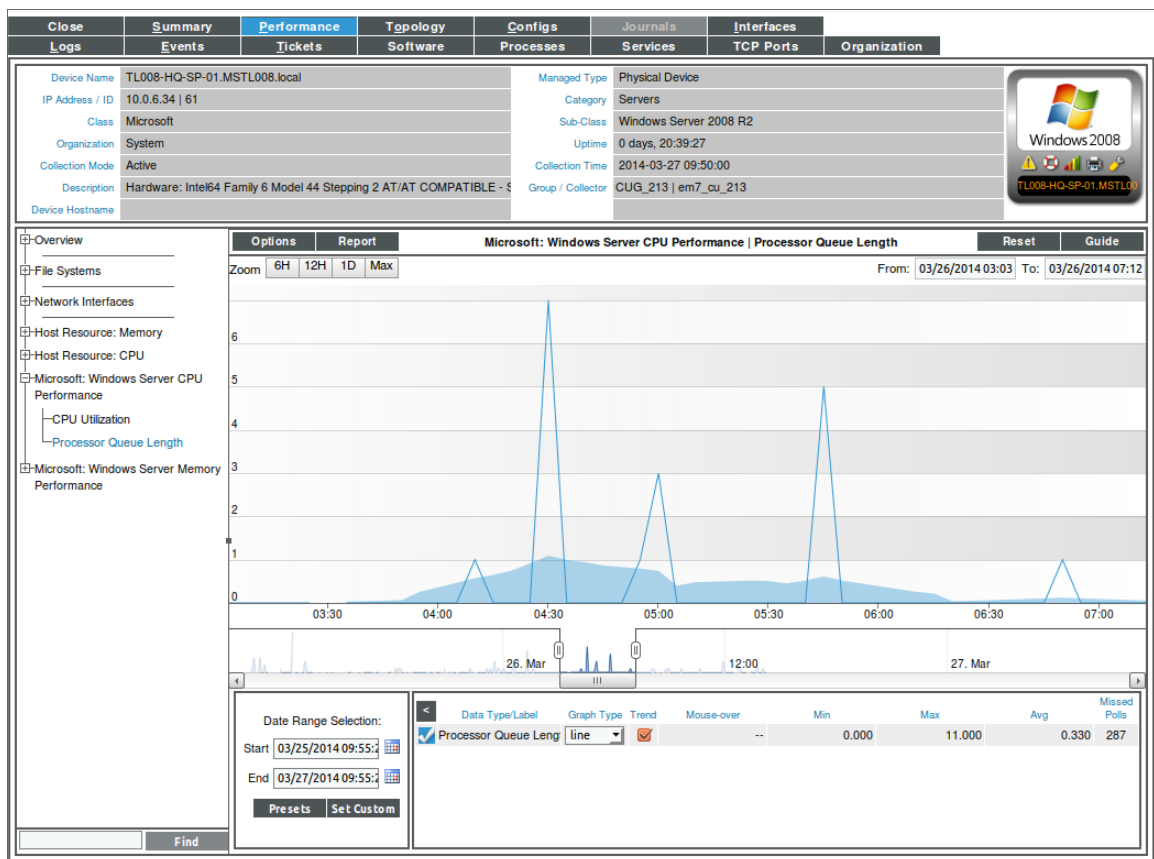

5. The Microsoft: Windows Server CPU Performance | Processor Queue Length report is displayed.
 - The report displays the collected values from the collection object Processor Queue Length.
 - You can mouse over different data points on the report, and the report will display the queue length value at the time selected on the graph.
 - The values for the Processor Queue Length label object are displayed in the graph key at the bottom of the page.

To learn more about performance reports, see the manual ***Device Management***.

© 2003 - 2020, ScienceLogic, Inc.

All rights reserved.

LIMITATION OF LIABILITY AND GENERAL DISCLAIMER

ALL INFORMATION AVAILABLE IN THIS GUIDE IS PROVIDED "AS IS," WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED. SCIENCELOGIC™ AND ITS SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT.

Although ScienceLogic™ has attempted to provide accurate information on this Site, information on this Site may contain inadvertent technical inaccuracies or typographical errors, and ScienceLogic™ assumes no responsibility for the accuracy of the information. Information may be changed or updated without notice. ScienceLogic™ may also make improvements and / or changes in the products or services described in this Site at any time without notice.

Copyrights and Trademarks

ScienceLogic, the ScienceLogic logo, and EM7 are trademarks of ScienceLogic, Inc. in the United States, other countries, or both.

Below is a list of trademarks and service marks that should be credited to ScienceLogic, Inc. The ® and ™ symbols reflect the trademark registration status in the U.S. Patent and Trademark Office and may not be appropriate for materials to be distributed outside the United States.

- ScienceLogic™
- EM7™ and em7™
- Simplify IT™
- Dynamic Application™
- Relational Infrastructure Management™

The absence of a product or service name, slogan or logo from this list does not constitute a waiver of ScienceLogic's trademark or other intellectual property rights concerning that name, slogan, or logo.

Please note that laws concerning use of trademarks or product names vary by country. Always consult a local attorney for additional guidance.

Other

If any provision of this agreement shall be unlawful, void, or for any reason unenforceable, then that provision shall be deemed severable from this agreement and shall not affect the validity and enforceability of any remaining provisions. This is the entire agreement between the parties relating to the matters contained herein.

In the U.S. and other jurisdictions, trademark owners have a duty to police the use of their marks. Therefore, if you become aware of any improper use of ScienceLogic Trademarks, including infringement or counterfeiting by third parties, report them to Science Logic's legal department immediately. Report as much detail as possible about the misuse, including the name of the party, contact information, and copies or photographs of the potential misuse to: legal@sciencelogic.com



ScienceLogic

800-SCI-LOGIC (1-800-724-5644)

International: +1-703-354-1010